

Red Line Lasermodule

LI650-4-3(8x26)30DEG-F100

Order Number: 70110524

Main Parameters (*)	min	typ	max	Unit
Wavelength		650		nm
Optical Output Power		4		mW
Operating Voltage	2.7	3	3.3	V DC
Operating Current	15	32	50	mA
Operating Temperature	-20		50	°C
Storage Temperature	-40		80	°C

Optical Parameters

Beam Shape	Line
Laser Class	1
Divergence	1.5mrad
Fan Angle	30°
Line Thickness	<0.3mm@0.1m
Operating Distance	0.1m
Optics	glass lens AR coated
Laser technology	Single Mode Diode
Focus	fixed (100mm)

Technical Parameters

Lifetime	>10000h
RoHS	yes

Electrical Parameters

Potential of Housing	isolated
Power Supply	LFNT-3

Mechanical Parameters

Size	Ø8x26mm
Material	aluminium
Cable length	100mm
Wire type	26AWG, 0,14mm ²
Output Aperture	3mm
Housing Color	black
Weight	3.5g
Stripping of wire	5mm

(*) Over the complete operating temperature range

Features




- Fixed focus
- Low power consumption
- For medical devices
- Uniform line thickness
- Image processing


Picture




Cable Colors

Ground		green	GND
Positive		red	2.7 - 3.3, typ 3V DC

Drawing

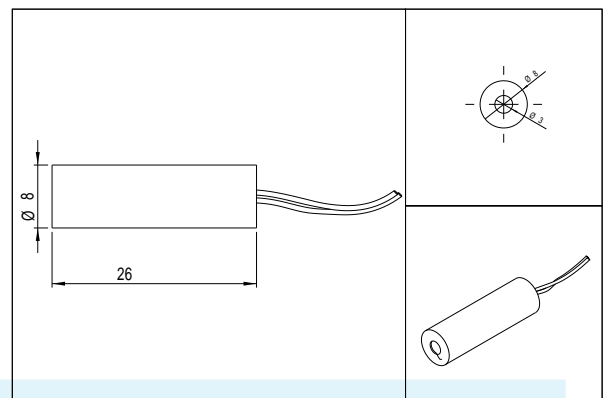

Safety Label



Revision

REV 13 | 05-AUG-2014