



Schneider Electric Industries SAS
35 Rue Joseph Monier
92506 Rueil Malmaison, France
www.se.com/contact
W9 1378323 0211 A11
02/2021

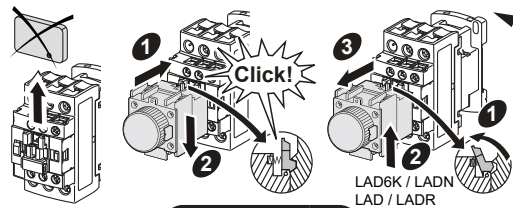

	LC1D09/ D12	LC1DT20/ DT25/ D098/D128	LC1D18	LC1D25/ D32/D38	LC1DT32/ DT40/ D188/D258	LC1D●●, LA●●
	8 mm 5/16"	12 mm 6/13"	8 mm 5/16"	10 mm 3/8"	12 mm 6/13"	8 mm 5/16"
	1...4	1...4	1.5...6	2.5...10	2.5...10	1...4
	1...4	1...4	1.5...6	2.5...10	2.5...10	1...4
	1...4	1...4	1...6	1...10	2.5...10	1...4
	1...2.5	1...2.5	1...4	1.5...6	2.5...10	1...2.5
	1...4	1...4	1.5...6	1.5...10	2.5...16	1...4
	1...4	1...4	1.5...6	2.5...10	2.5...16	1...4
	10-18 CU 75°C	10-18 CU 75°C	8-18 CU 75°C	6-14 CU 75°C	8-12 CU 75°C	10-18 CU 75°C
	6 mm	6 mm	6 mm	6 mm	6 mm	6 mm
	1.7 N.m 15 lb-in	1.7 N.m 15 lb-in	1.7 N.m 15 lb-in	2.5 N.m 22 lb-in	1.8 N.m 16 lb-in	1.7 N.m 15 lb-in

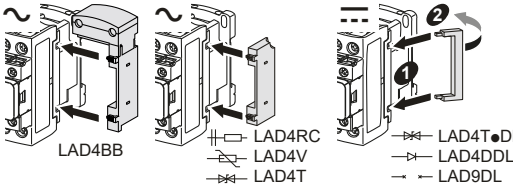

⚠️ WARNING / 警告

RISK OF FIRE OR ELECTRIC SHOCK (FOR CONTACTOR WITH UL HI-FAULT SHORT CIRCUIT CURRENT RATINGS ONLY)

- The opening of the branch-circuit protective device may be an indication that a fault current has been interrupted.
- To reduce the risk of fire or electric shock, current-carrying parts and the other components of the controller should be examined and replaced if damaged.
- Failure to follow these instructions can result in death, serious injury, or equipment damage.**



可能有火灾或者触电的危险（仅限UL高故障短路电流额定值的接触器）

- 支路保护设备断开，表明故障电流已被中断。
- 为降低火灾或触电风险，应检查带电部件和其他控制元件，如有损坏，需及时更换。
- 不遵循上述说明可能导致人员伤亡或设备损坏。

3P AC TeSys D contactors are grade 3 (LC1D09 -> LC1D18) and grade 2 (LC1D25 -> LC1D38) according to GB 21518. Maximum power consumption lower than 9.5 VA.

根据GB 21518标准，三极 TeSys D 系列交流接触器能效等级为3级 (LC1D09 -> LC1D18) 和2级 (LC1D25 -> LC1D38)，产品最大吸持功率低于9.5VA。

- AC/DC: - use of this product in EMC environment B may require mitigation measures to avoid unwanted disturbance.
- full open AC at 10%Us

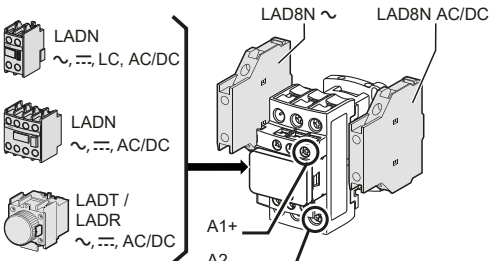

Definite Purpose ratings, 3 Phase, Load wiring: breaking all lines Hermetic refrigeration compressor 特定用途额定值, 3 相, 断开所有线路 封闭式制冷压缩机设备				
Device	FLA	LRA		
		240 V	480 V	600 V
LC1D09	9	54	45	36
LC1D12	12	72	60	48
LC1D18	18	108	90	72
LC1D25	25	150	125	100
LC1D32	32	192	160	128

Only applicable for UL/CSA marked products except DC coil.

UL/CSA Lighting Ratings UL/CSA 照明电流额定值		
Device 设备	Ballast, 600 V 镇流器	Tungsten, 480 Y / 277 V 钨丝灯
LC1D09	20 A	20 A
LC1D12	25 A	25 A CSA only
LC1D18	32 A	25 A
LC1D25	40 A	40 A
LC1D32	50 A	50 A
LC1D20	20 A	20 A
LC1D25	25 A	25 A CSA only
LC1D32	32 A	25 A
LC1D40	40 A	40 A

Elevator Duty HP ratings / 电梯专用马力 (HP) 额定值					
	One Phase 单相	Three Phases 三相			
	230 V	200/208 V	230 V	460 V	575 V
LC1D12	1.5	2	3	7.5	7.5
LC1D18	3	5	5	-	-
LC1D25	3	5	7.5	15	20
LC1D32	5	10	7.5	-	-

Only applicable for UL/CSA marked products except DC coil.

⚠ ⚠ DANGER / 危险

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH
Disconnect all power before servicing equipment.
Failure to follow these instructions will result in death or serious injury.

电击、爆炸或弧闪的危险
在此电力设备上工作时, 请先切断所有电源。
不遵循上述规定将可能导致人员伤亡。

"For Motor Starting Use Schneider Electric Overload Relay Series LR".
电动机启动请使用施耐德电气LR系列热过载继电器。

Schneider Electric Limited
Stafford Park 5
Telford, TF3 3BL
United Kingdom
www.se.com/uk

**UK
CA**