

## LMV431, LMV431A, LMV431B

SNVS041F-MAY 2004-REVISED MAY 2005

The LMV431, LMV431A and LMV431B are precision

1.24V shunt regulators capable of adjustment to 30V.

Negative feedback from the cathode to the adjust pin

controls the cathode voltage, much like a non-

inverting op amp configuration (Refer to Symbol and

Functional diagrams). A two resistor voltage divider terminated at the adjust pin controls the gain of a

1.24V band-gap reference. Shorting the cathode to

the adjust pin (voltage follower) provides a cathode

The LMV431, LMV431A and LMV431B have

respective initial tolerances of 1.5%, 1% and 0.5%, and functionally lends themselves to several

performance at low voltages. Applications include a

3V to 2.7V low drop-out regulator, an error amplifier

in a 3V off-line switching regulator and even as a voltage detector. These parts are typically stable with

capacitive loads greater than 10nF and less than

The LMV431, LMV431A and LMV431B provide

require zener

diode

type

## LMV431/LMV431A/LMV431B Low-Voltage (1.24V) Adjustable Precision Shunt Regulators

Check for Samples: LMV431, LMV431A, LMV431B

DESCRIPTION

voltage of a 1.24V.

that

performance at a competitive price.

applications

50pF.

#### **FEATURES**


www.ti.com


- Low Voltage Operation/Wide Adjust Range (1.24V/30V)
- 0.5% Initial Tolerance (LMV431B)
- Temperature Compensated for Industrial Temperature Range (39 PPM/°C for the LMV431AI)
- Low Operation Current (55µA)
- Low Output Impedance (0.25Ω)
- Fast Turn-On Response
- Low Cost

#### **APPLICATIONS**

- Shunt Regulator
- Series Regulator
- Current Source or Sink
- Voltage Monitor
- Error Amplifier
- 3V Off-Line Switching Regulator
- Low Dropout N-Channel Series Regulator

#### **Connection Diagram**






# \* NC 1 5 Anode \* NC 2 Cathode 3 4 Ref

\*Pin 1 is not internally connected. \*Pin 2 is internally connected to Anode pin. Pin 2 should be either floating or connected to Anode pin.

> Figure 2. SOT-23-5 Top View



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet. All trademarks are the property of their respective owners.


## LMV431, LMV431A, LMV431B




www.ti.com


SNVS041F-MAY 2004-REVISED MAY 2005

#### Symbol and Functional Diagrams








#### **Simplified Schematic**

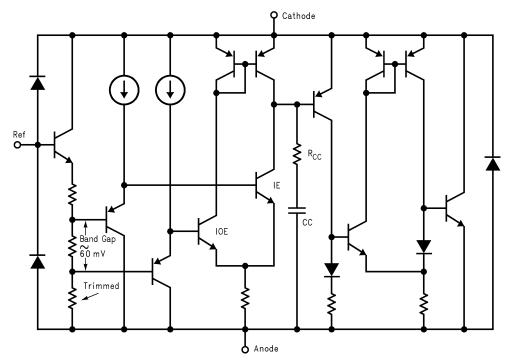

#### **DC/AC Test Circuits for Table and Curves**










2



#### www.ti.com



#### Figure 6. Test Circuit for Off-State Current



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

#### ABSOLUTE MAXIMUM RATINGS (1)(2)

Storage Temperature Range		−65°C to +150°C
Operating Temperature Range	Industrial (LMV431AI, LMV431I)	-40°C to +85°C
	Commercial (LMV431AC, LMV431C, LMV431BC)	0°C to +70°C
Lead Temperature	TO-92 Package/SOT-23 -5,-3 Package (Soldering, 10 sec.)	265°C
	TO-92	0.78W
Internal Power Dissipation <sup>(3)</sup>	SOT-23-5, -3 Package	0.28W
Cathode Voltage		35V
Continuous Cathode Current		-30 mA to +30mA
Reference Input Current range		05mA to 3mA

 Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Electrical specifications do not apply when operating the device beyond its rated operating conditions.

(2) If Military/Aerospace specified devices are required, please contact the Texas Instruments Sales Office/ Distributors for availability and specifications.

(3) Ratings apply to ambient temperature at 25°C. Above this temperature, derate the TO-92 at 6.2 mW/°C, and the SOT-23-5 at 2.2 mW/°C. See derating curve in Operating Condition section..

#### **OPERATING CONDITIONS**

Cathode Voltage V <sub>REF</sub> to 30V						
Cathode Current		0.1 mA to 15mA				
Temperature range	$LMV431AI -40^{\circ}C \le T_A \le 85^{\circ}C$					
Thermal Resistance $(\theta_{JA})^{(1)}$	SOT-23-5, -3 Package	455 °C/W				
	TO-92 Package	161 °C/W				
Derating Curve (Slope = −1/θ <sub>JA</sub> )		(WE) NOLLY ALSSIG SOOMILING 500 500 500 500 500 500 500 50				

(1)  $T_{J Max} = 150^{\circ}C$ ,  $T_{J} = T_{A} + (\theta_{JA} P_{D})$ , where  $P_{D}$  is the operating power of the device.


RUMENTS www.ti.com

### LMV431C ELECTRICAL CHARACTERISTICS

$T_A = 25^{\circ}C u$	nless otherwise	specified
-----------------------	-----------------	-----------

Symbol	Parameter	Conditio	Min	Тур	Max	Unit s	
V <sub>REF</sub>	Reference Voltage	$V_Z = V_{REF}, I_Z = 10mA$	$T_A = 25^{\circ}C$	1.222	1.24	1.258	
		(See Figure 4)	T <sub>A</sub> = Full Range	1.21		1.27	V
$V_{DEV}$	Deviation of Reference Input Voltage Over Temperature <sup>(1)</sup>	$V_Z = V_{REF}$ , $I_Z = 10mA$ , $T_A = Full Range (See Figur)$		4	12	mV	
$\Delta V_{REF}/\Delta V_Z$	Ratio of the Change in Reference Voltage to the Change in Cathode Voltage	$ \begin{array}{l} I_Z = 10 \text{mA} \; (\text{see Figure 5} \;) \\ V_Z \; \text{from} \; V_{\text{REF}} \; \text{to} \; 6V \\ R_1 = 10 \text{k}, \; R_2 = \infty \; \text{and} \; 2.6 \text{k} \end{array} $		-1.5	-2.7	mV/ V	
I <sub>REF</sub>	Reference Input Current	$\begin{array}{l} R_1 = 10 \mathrm{k}\Omega,  R_2 = \infty \\ I_{I} = 10 \mathrm{m}A \; (see \; \textit{Figure 5}) \end{array}$			0.15	0.5	μΑ
∝I <sub>REF</sub>	Deviation of Reference Input Current over Temperature	$ \begin{array}{l} R_1 = 10 k \Omega,  R_2 = \infty, \\ I_{I} = 10 m A,  T_{A} = Full \; Range \end{array} $		0.05	0.3	μA	
I <sub>Z(MIN)</sub>	Minimum Cathode Current for Regulation	V <sub>Z</sub> = V <sub>REF</sub> (see Figure 4)		55	80	μA	
I <sub>Z(OFF)</sub>	Off-State Current	V <sub>Z</sub> =6V, V <sub>REF</sub> = 0V (see Fig	ure 6 )		0.001	0.1	μA
r <sub>Z</sub>	Dynamic Output Impedance <sup>(2)</sup>	$V_Z = V_{REF}$ , $I_Z = 0.1$ mA to 15 Frequency = 0Hz (see Figure 1)			0.25	0.4	Ω

(1) Deviation of reference input voltage, V<sub>DEV</sub>, is defined as the maximum variation of the reference input voltage over the full temperature range.See following:

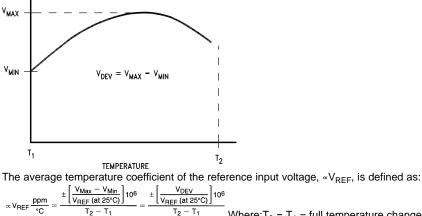

Where:  $T_2 - T_1$  = full temperature change.  $\sim V_{REF}$  can be positive or negative depending

on whether the slope is positive or negative. Example:  $V_{DEV} = 6.0 \text{mV}$ ,  $_{REF} = 1240 \text{mV}$ ,  $T_2 - T_1 = 125^{\circ}\text{C}$ . (2) The dynamic output impedance,  $r_Z$ , is defined as:  $r_Z = \frac{\Delta V_Z}{\Delta I_Z}$  When the device is programmed with two external resistors, R1 and R2, (see *Figure 5*), the dynamic output impedance of the overall circuit,  $r_Z$ , is defined as:  $r_Z = \frac{\Delta V_Z}{\Delta I_Z} \simeq \left[ r_Z \left( 1 + \frac{R1}{R2} \right) \right]$ 

4




www.ti.com

#### LMV431I ELECTRICAL CHARACTERISTICS

25°C uplace etherwise energified

Symbol	Parameter	Condit	Min	Тур	Мах	Unit s	
V <sub>REF</sub>	Reference Voltage	$V_Z = V_{REF}, I_Z = 10mA$	$T_A = 25^{\circ}C$	1.222	1.24	1.258	v
		(See Figure 4)	T <sub>A</sub> = Full Range	1.202		1.278	v
$V_{DEV}$	Deviation of Reference Input Voltage Over Temperature <sup>(1)</sup>	$V_Z = V_{REF}$ , $I_Z = 10mA$ , $T_A = Full Range (See Figure 1)$		6	20	mV	
$\Delta V_{REF}/\Delta V_Z$	Ratio of the Change in Reference Voltage to the Change in Cathode Voltage	$I_Z = 10mA \text{ (see Figure 5 )}$ $V_Z \text{ from } V_{REF} \text{ to } 6V$ $R_1 = 10k, R_2 = \infty \text{ and } 2.6k$		-1.5	-2.7	mV/ V	
I <sub>REF</sub>	Reference Input Current	$R_1 = 10kΩ$ , $R_2 = ∞$ $I_1 = 10mA$ (see Figure 5)			0.15	0.5	μA
∝I <sub>REF</sub>	Deviation of Reference Input Current over Temperature	$R_1 = 10kΩ$ , $R_2 = ∞$ , $I_1 = 10mA$ , $T_A = Full Rang$		0.1	0.4	μA	
I <sub>Z(MIN)</sub>	Minimum Cathode Current for Regulation	V <sub>Z</sub> = V <sub>REF</sub> (see Figure 4)		55	80	μA	
I <sub>Z(OFF)</sub>	Off-State Current	$V_Z = 6V, V_{REF} = 0V$ (see	Figure 6 )		0.001	0.1	μΑ
r <sub>Z</sub>	Dynamic Output Impedance <sup>(2)</sup>	$V_Z = V_{REF}$ , $I_Z = 0.1 \text{mA to}$ Frequency = 0Hz (see Fig			0.25	0.4	Ω

Deviation of reference input voltage, V<sub>DEV</sub>, is defined as the maximum variation of the reference input voltage over the full temperature (1) range.See following:

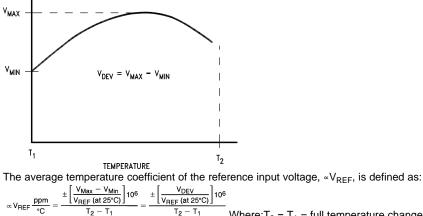

Where:  $T_2 - T_1$  = full temperature change.  $\sim V_{REF}$  can be positive or negative depending


on whether the slope is positive or negative. Example:  $V_{DEV} = 6.0 \text{mV}$ ,  $_{REF} = 1240 \text{mV}$ ,  $T_2 - T_1 = 125^{\circ}\text{C}$ . (2) The dynamic output impedance,  $r_Z$ , is defined as:  $r_Z = \frac{\Delta V_Z}{\Delta I_Z}$  When the device is programmed with two external resistors, R1 and R2, (see *Figure 5*), the dynamic output impedance of the overall circuit,  $r_Z$ , is defined as:  $r_Z = \frac{\Delta V_Z}{\Delta I_Z} \simeq \left[ r_Z \left( 1 + \frac{R1}{R2} \right) \right]$ 

RUMENTS www.ti.com

### LMV431AC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Min	Тур	Max	Unit s		
V <sub>REF</sub>	Reference Voltage	$V_Z = V_{REF}$ , $I_Z = 10 \text{ mA}$	$T_A = 25^{\circ}C$	1.228	1.24	1.252	v
		(See Figure 4)	T <sub>A</sub> = Full Range	1.221		1.259	v
$V_{DEV}$	Deviation of Reference Input Voltage Over Temperature <sup>(1)</sup>	$V_Z = V_{REF}, I_Z = 10mA,$ $T_A = Full Range (See Figure$		4	12	mV	
$\Delta V_{REF} / \Delta V_Z$	Ratio of the Change in Reference Voltage to the Change in Cathode Voltage	$I_Z = 10 \text{ mA} (\text{see Figure 5})$ $V_Z \text{ from } V_{REF} \text{ to } 6V$ $R_1 = 10k, R_2 = \infty \text{ and } 2.6k$		-1.5	-2.7	mV/ V	
I <sub>REF</sub>	Reference Input Current	$R_1 = 1 kΩ$ , $R_2 = ∞$ $I_1 = 10 mA$ (see Figure 5)		0.15	0.50	μA	
∝I <sub>REF</sub>	Deviation of Reference Input Current over Temperature	$R_1 = 10$ kΩ, $R_2 = ∞$ , $I_1 = 10$ mA, $T_A =$ Full Range		0.05	0.3	μA	
I <sub>Z(MIN)</sub>	Minimum Cathode Current for Regulation	V <sub>Z</sub> = V <sub>REF</sub> (see Figure 4)		55	80	μA	
I <sub>Z(OFF)</sub>	Off-State Current	$V_Z = 6V, V_{REF} = 0V$ (see Fig		0.001	0.1	μA	
r <sub>Z</sub>	Dynamic Output Impedance <sup>(2)</sup>	$V_Z = V_{REF}$ , $I_Z = 0.1$ mA to 15 Frequency = 0 Hz (see Figu			0.25	0.4	Ω

(1) Deviation of reference input voltage, V<sub>DEV</sub>, is defined as the maximum variation of the reference input voltage over the full temperature range.See following:

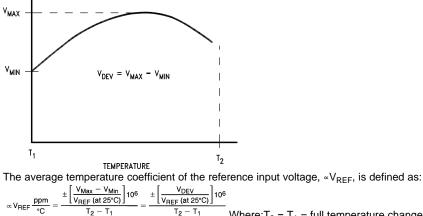

Where:  $T_2 - T_1$  = full temperature change.  $\sim V_{REF}$  can be positive or negative depending

on whether the slope is positive or negative. Example:  $V_{DEV} = 6.0 \text{mV}$ ,  $_{REF} = 1240 \text{mV}$ ,  $T_2 - T_1 = 125^{\circ}\text{C}$ . (2) The dynamic output impedance,  $r_Z$ , is defined as:  $r_Z = \frac{\Delta V_Z}{\Delta I_Z}$  When the device is programmed with two external resistors, R1 and R2, (see *Figure 5*), the dynamic output impedance of the overall circuit,  $r_Z$ , is defined as:  $r_Z = \frac{\Delta V_Z}{\Delta I_Z} \simeq \left[ r_Z \left( 1 + \frac{R1}{R2} \right) \right]$ 

6




www.ti.com

#### LMV431AI ELECTRICAL CHARACTERISTICS

25°C unless otherwise specified

Symbol	Parameter	Condit	Min	Тур	Мах	Unit s	
V <sub>REF</sub>	Reference Voltage	$V_Z = V_{REF}, I_Z = 10mA$	$T_A = 25^{\circ}C$	1.228	1.24	1.252	
		(See Figure 4)	T <sub>A</sub> = Full Range	1.215		1.265	V
V <sub>DEV</sub>	Deviation of Reference Input Voltage Over Temperature <sup>(1)</sup>	$V_Z = V_{REF}, I_Z = 10mA,$ $T_A = Full Range (See Figure 1)$		6	20	mV	
$\Delta V_{REF} / \Delta V_Z$	Ratio of the Change in Reference Voltage to the Change in Cathode Voltage	$I_Z = 10mA \text{ (see Figure 5 )}$ $V_Z \text{ from } V_{REF} \text{ to } 6V$ $R_1 = 10k, R_2 = \infty \text{ and } 2.6k$		-1.5	-2.7	mV/ V	
I <sub>REF</sub>	Reference Input Current	$R_1 = 10kΩ$ , $R_2 = ∞$ $I_1 = 10mA$ (see Figure 5)			0.15	0.5	μA
∝I <sub>REF</sub>	Deviation of Reference Input Current over Temperature	$R_1 = 10kΩ$ , $R_2 = ∞$ , $I_1 = 10mA$ , $T_A = Full Range$	$R_1 = 10k\Omega$ , $R_2 = ∞$ , $I_1 = 10mA$ , $T_A = Full Range (see Figure 5)$			0.4	μA
I <sub>Z(MIN)</sub>	Minimum Cathode Current for Regulation	V <sub>Z</sub> = V <sub>REF</sub> (see Figure 4)			55	80	μA
I <sub>Z(OFF)</sub>	Off-State Current	$V_Z = 6V, V_{REF} = 0V$ (see F	Figure 6 )		0.001	0.1	μA
r <sub>Z</sub>	Dynamic Output Impedance <sup>(2)</sup>	$V_Z = V_{REF}$ , $I_Z = 0.1$ mA to 1 Frequency = 0Hz (see Fig			0.25	0.4	Ω

Deviation of reference input voltage, V<sub>DEV</sub>, is defined as the maximum variation of the reference input voltage over the full temperature (1) range.See following:

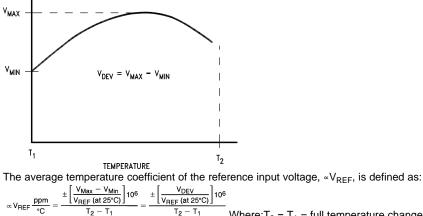

Where:  $T_2 - T_1$  = full temperature change.  $\sim V_{REF}$  can be positive or negative depending

on whether the slope is positive or negative. Example:  $V_{DEV} = 6.0 \text{mV}$ ,  $_{REF} = 1240 \text{mV}$ ,  $T_2 - T_1 = 125^{\circ}\text{C}$ . (2) The dynamic output impedance,  $r_Z$ , is defined as:  $r_Z = \frac{\Delta V_Z}{\Delta I_Z}$  When the device is programmed with two external resistors, R1 and R2, (see *Figure 5*), the dynamic output impedance of the overall circuit,  $r_Z$ , is defined as:  $r_Z = \frac{\Delta V_Z}{\Delta I_Z} \simeq \left[ r_Z \left( 1 + \frac{R1}{R2} \right) \right]$ 

Copyright © 2004–2005, Texas Instruments Incorporated


RUMENTS www.ti.com

### LMV431BC ELECTRICAL CHARACTERISTICS

 $T_{A} = 25^{\circ}C$  unless otherwise specified

Symbol	Parameter	Conditio	Min	Тур	Max	Unit s	
V <sub>REF</sub>	Reference Voltage	$V_Z = V_{REF}, I_Z = 10mA$	$T_A = 25^{\circ}C$	1.234	1.24	1.246	
		(See Figure 4)	T <sub>A</sub> = Full Range	1.227		1.253	V
$V_{\text{DEV}}$	Deviation of Reference Input Voltage Over Temperature <sup>(1)</sup>	$V_Z = V_{REF}$ , $I_Z = 10mA$ , $T_A = Full Range (See Figur)$		4	12	mV	
$\Delta V_{REF}/\Delta V_Z$	Ratio of the Change in Reference Voltage to the Change in Cathode Voltage	$ \begin{array}{l} I_Z = 10 \text{mA} \ (\text{see Figure 5}) \\ V_Z \ \text{from} \ V_{\text{REF}} \ \text{to} \ 6V \\ R_1 = 10 \text{k}, \ R_2 = \infty \ \text{and} \ 2.6 \text{k} \end{array} $		-1.5	-2.7	mV/ V	
I <sub>REF</sub>	Reference Input Current	$R_1 = 10k\Omega, R_2 = \infty$ I <sub>I</sub> = 10mA (see Figure 5)		0.15	0.50	μA	
∝I <sub>REF</sub>	Deviation of Reference Input Current over Temperature	$R_1 = 10k\Omega, R_2 = \infty,$ $I_1 = 10mA, T_A = Full Range$		0.05	0.3	μA	
I <sub>Z(MIN)</sub>	Minimum Cathode Current for Regulation	V <sub>Z</sub> = V <sub>REF</sub> (see Figure 4)		55	80	μA	
I <sub>Z(OFF)</sub>	Off-State Current	V <sub>Z</sub> = 6V, V <sub>REF</sub> = 0V (see Fig		0.001	0.1	μA	
r <sub>Z</sub>	Dynamic Output Impedance (2)	$V_Z = V_{REF}$ , $I_Z = 0.1$ mA to 15 Frequency = 0Hz (see Figu			0.25	0.4	Ω

(1) Deviation of reference input voltage, V<sub>DEV</sub>, is defined as the maximum variation of the reference input voltage over the full temperature range.See following:

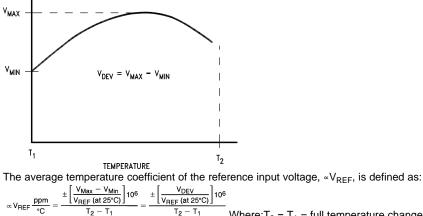

Where:  $T_2 - T_1$  = full temperature change.  $\sim V_{REF}$  can be positive or negative depending

on whether the slope is positive or negative. Example:  $V_{DEV} = 6.0 \text{mV}$ ,  $_{REF} = 1240 \text{mV}$ ,  $T_2 - T_1 = 125^{\circ}\text{C}$ . (2) The dynamic output impedance,  $r_Z$ , is defined as:  $r_Z = \frac{\Delta V_Z}{\Delta I_Z}$  When the device is programmed with two external resistors, R1 and R2, (see *Figure 5*), the dynamic output impedance of the overall circuit,  $r_Z$ , is defined as:  $r_Z = \frac{\Delta V_Z}{\Delta I_Z} \simeq \left[ r_Z \left( 1 + \frac{R1}{R2} \right) \right]$ 

8




www.ti.com

#### LMV431BI ELECTRICAL CHARACTERISTICS

 $T_{\rm v} = 25^{\circ}$ C unless otherwise specified

Symbol	Parameter	Conditio	Min	Тур	Мах	Unit s	
V <sub>REF</sub>	Reference Voltage	$V_Z = V_{REF}, I_Z = 10mA$	$T_A = 25^{\circ}C$	1.234	1.24	1.246	
		(See Figure 4)	T <sub>A</sub> = Full Range	1.224		1.259	V
V <sub>DEV</sub>	Deviation of Reference Input Voltage Over Temperature <sup>(1)</sup>	$V_Z = V_{REF}$ , $I_Z = 10mA$ , $T_A = Full Range (See Figur)$		6	20	mV	
$\Delta V_{REF}/\Delta V_Z$	Ratio of the Change in Reference Voltage to the Change in Cathode Voltage	$\begin{array}{l} I_Z = 10 \text{mA} \ (\text{see Figure 5}) \\ V_Z \ \text{from } V_{\text{REF}} \ \text{to} \ 6V \\ R_1 = 10 \text{k}, \ R_2 = \infty \ \text{and} \ 2.6 \text{k} \end{array}$		-1.5	-2.7	mV/ V	
I <sub>REF</sub>	Reference Input Current	$R_1 = 10k\Omega, R_2 = \infty$ I <sub>I</sub> = 10mA (see Figure 5)		0.15	0.50	μA	
∝I <sub>REF</sub>	Deviation of Reference Input Current over Temperature	$\begin{array}{l} R_1 = 10 k \Omega, \ R_2 = \infty, \\ I_1 = 10 m A, \ T_A = Full \ Range \end{array}$	(see Figure 5)		0.1	0.4	μA
I <sub>Z(MIN)</sub>	Minimum Cathode Current for Regulation	V <sub>Z</sub> = V <sub>REF</sub> (see Figure 4)		55	80	μA	
I <sub>Z(OFF)</sub>	Off-State Current	$V_Z = 6V, V_{REF} = 0V$ (see Fig.	gure 6 )		0.001	0.1	μA
r <sub>Z</sub>	Dynamic Output Impedance <sup>(2)</sup>	$V_Z = V_{REF}$ , $I_Z = 0.1$ mA to 15 Frequency = 0Hz (see Figu			0.25	0.4	Ω

Deviation of reference input voltage, V<sub>DEV</sub>, is defined as the maximum variation of the reference input voltage over the full temperature (1) range.See following:



The average temperature coefficient of the reference input voltage,  ${}_{\sim}V_{REF}$ , is defined as:

 $\pm \left[\frac{V_{Max} - V_{Min}}{V_{REF} \text{ (at 25°C)}}\right] 10^6$  $\pm \left[\frac{V_{\text{DEV}}}{V_{\text{REF}} \text{ (at 25°C)}}\right] 10^6$  $\propto V_{REF}$  $T_2 - T_1$ 


Where:  $T_2 - T_1$  = full temperature change.  $\sim V_{REF}$  can be positive or negative depending  $\left[\frac{6.0 \text{ mV}}{1240 \text{ mV}}\right] 10^6$ 

on whether the slope is positive or negative. Example:  $V_{\text{DEV}} = 6.0 \text{mV}$ ,  $_{\text{REF}} = 1240 \text{mV}$ ,  $T_2 - T_1 = 125^{\circ}\text{C}$ .  $^{\text{cv}}V_{\text{REF}} = \frac{\lfloor 1240 \text{ mV} \rfloor^{10^{\circ}}}{125^{\circ}\text{C}} = +39 \text{ ppm/}^{\circ}\text{C}$ (2) The dynamic output impedance,  $r_Z$ , is defined as:  $r_Z = \frac{\Delta V_Z}{\Delta I_Z}$  When the device is programmed with two external resistors, R1 and R2, (see *Figure 5*), the dynamic output impedance of the overall circuit,  $r_Z$ , is defined as:  $r_Z = \frac{\Delta V_Z}{\Delta I_Z} \approx \left[ r_Z \left( 1 + \frac{R1}{R_2} \right) \right]$ 





www.ti.com

#### SNVS041F-MAY 2004-REVISED MAY 2005

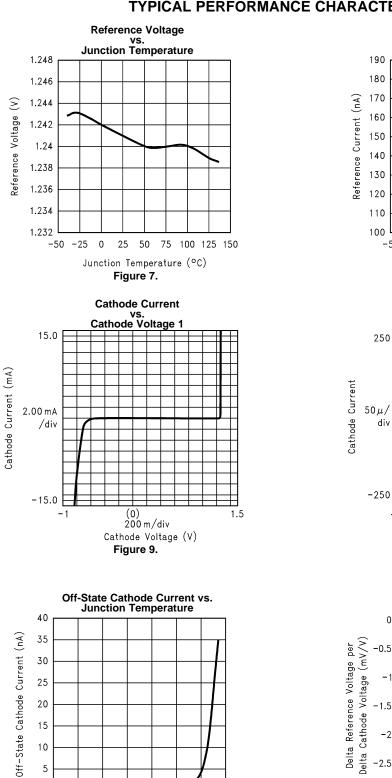



# TYPICAL PERFORMANCE CHARACTERISTICS

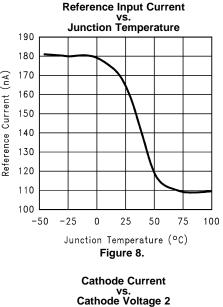









Junction Temperature (°C)

Figure 11.

0

-50 -25 0 25 50 75 100 125

#### **EXAS INSTRUMENTS**

www.ti.com

## LMV431, LMV431A, LMV431B

SNVS041F-MAY 2004-REVISED MAY 2005




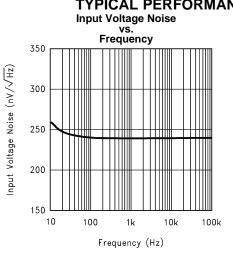


Figure 13.




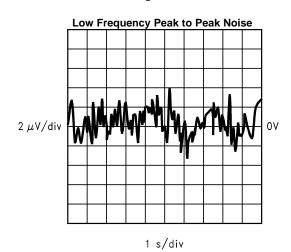

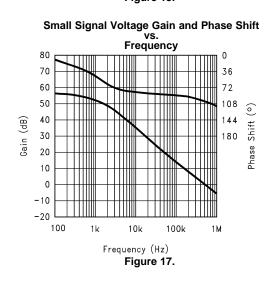

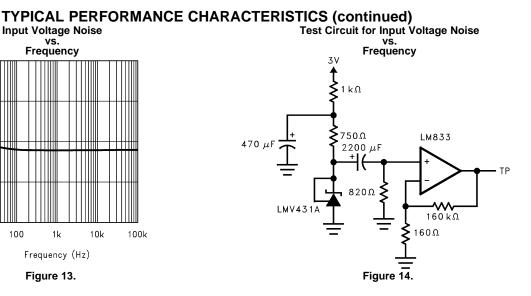

Test Circuit for Peak to Peak Noise (BW= 0.1Hz to 10Hz)

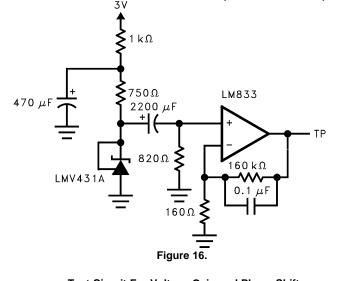


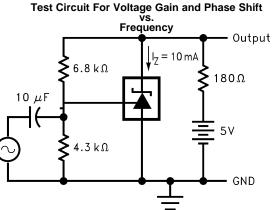


Figure 18.



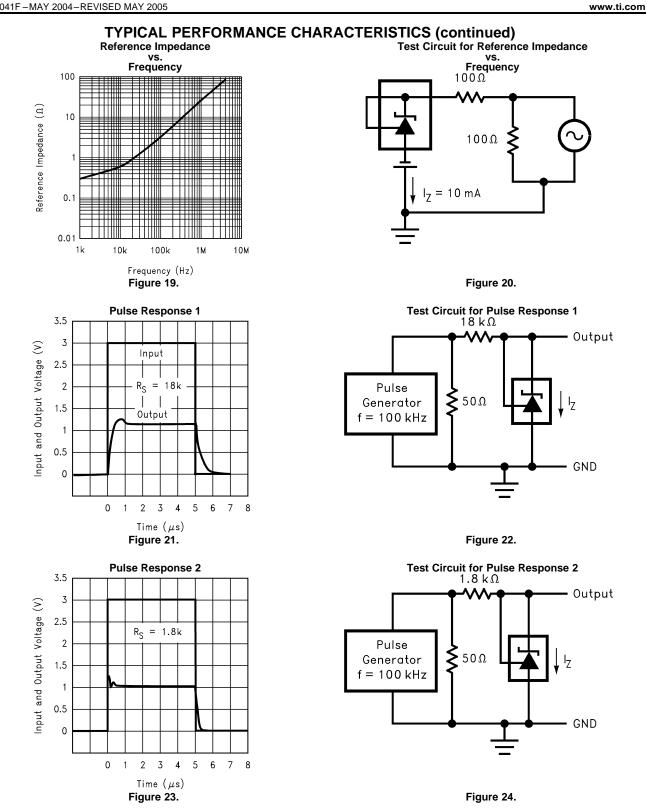

#### Texas INSTRUMENTS

www.ti.com

## LMV431, LMV431A, LMV431B

SNVS041F-MAY 2004-REVISED MAY 2005

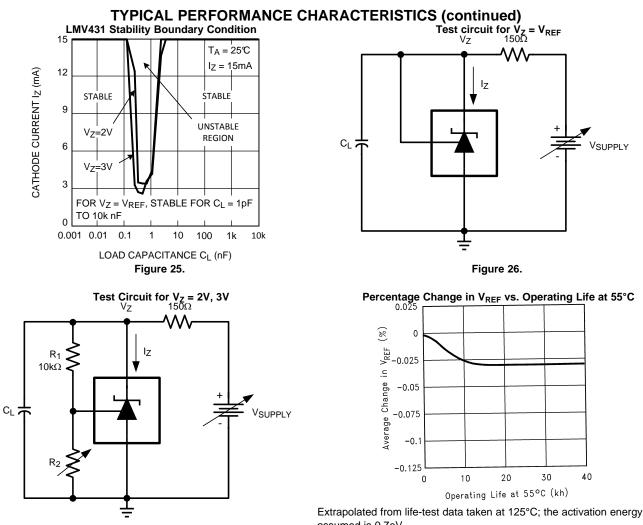



Figure 27.

assumed is 0.7eV.

#### Figure 28.




#### **TYPICAL APPLICATIONS**

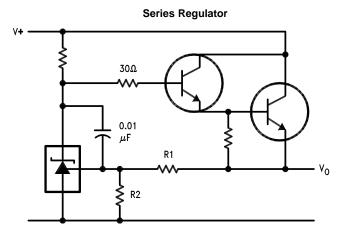


# $V_{O}\approx\left(1+\frac{R1}{R2}\right)V_{REF}$

#### Higher Current Shunt Regulator




 $V_{O}\approx\left(1+\frac{R1}{R2}\right)V_{REF}$ 


Over Voltage/Under VoltageProtection Circuit

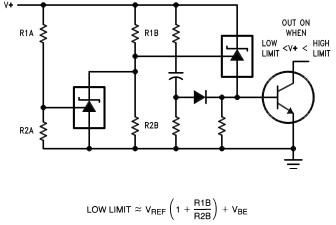




**Output Control of a Three Terminal Fixed Regulator** 








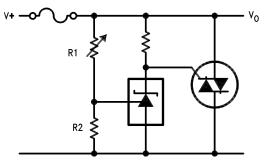

$$V_{\text{LIMIT}} \approx \left(1 + \frac{\text{R1}}{\text{R2}}\right) V_{\text{REF}}$$

Voltage Monitor

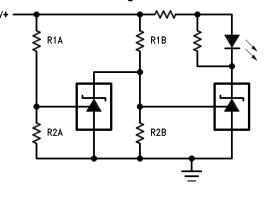


 $\begin{array}{l} \text{LOW LIMIT} \approx V_{\text{REF}} \left( 1 + \frac{\text{R1B}}{\text{R2B}} \right) & \begin{array}{l} \text{LED ON WHEN} \\ \text{LOW LIMIT} < V^+ < \text{HIGH LIMIT} \\ \end{array} \\ \\ \text{HIGH LIMIT} \approx V_{\text{REF}} \left( 1 + \frac{\text{R1A}}{\text{R2A}} \right) \end{array}$ 



## LMV431, LMV431A, LMV431B

SNVS041F-MAY 2004-REVISED MAY 2005

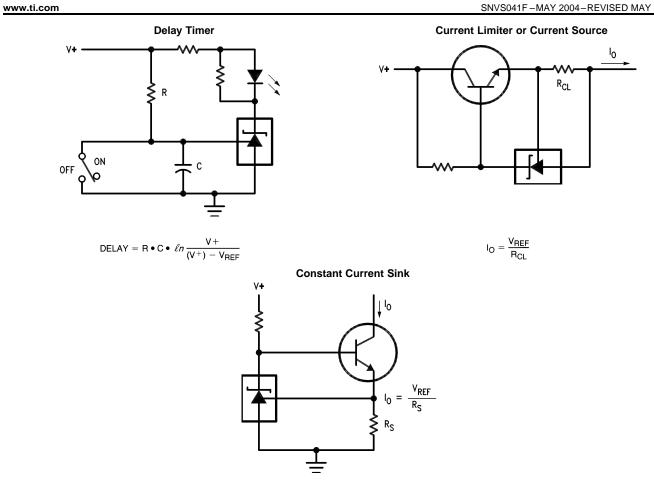

Copyright © 2004–2005, Texas Instruments Incorporated



4-May-2014

## **PACKAGING INFORMATION**

Orderable Device	Status	Package Type	Package	Pins	Package	Eco Plan	Lead/Ball Finish	MSL Peak Temp	Op Temp (°C)	Device Marking	Samples
	(1)		Drawing		Qty	(2)	(6)	(3)		(4/5)	
LMV431ACM5	NRND	SOT-23	DBV	5	1000	TBD	Call TI	Call TI	-40 to 85	N09A	
LMV431ACM5/NOPB	ACTIVE	SOT-23	DBV	5	1000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 85	N09A	Samples
LMV431ACM5X/NOPB	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 85	N09A	Samples
LMV431AIM5	NRND	SOT-23	DBV	5	1000	TBD	Call TI	Call TI	-40 to 85	N08A	
LMV431AIM5/NOPB	ACTIVE	SOT-23	DBV	5	1000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 85	N08A	Samples
LMV431AIM5X	NRND	SOT-23	DBV	5	3000	TBD	Call TI	Call TI	-40 to 85	N08A	
LMV431AIM5X/NOPB	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 85	N08A	Samples
LMV431AIMF	NRND	SOT-23	DBZ	3	1000	TBD	Call TI	Call TI	-40 to 85	RLA	
LMV431AIMF/NOPB	ACTIVE	SOT-23	DBZ	3	1000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 85	RLA	Samples
LMV431AIMFX	NRND	SOT-23	DBZ	3	3000	TBD	Call TI	Call TI	-40 to 85	RLA	
LMV431AIMFX/NOPB	ACTIVE	SOT-23	DBZ	3	3000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 85	RLA	Samples
LMV431AIZ/LFT3	ACTIVE	TO-92	LP	3	2000	Green (RoHS & no Sb/Br)	CU SN	N / A for Pkg Type		LMV431 AIZ	Samples
LMV431AIZ/NOPB	ACTIVE	TO-92	LP	3	1800	Green (RoHS & no Sb/Br)	CU SN	N / A for Pkg Type	-40 to 85	LMV431 AIZ	Samples
LMV431BCM5/NOPB	ACTIVE	SOT-23	DBV	5	1000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM		N09C	Samples
LMV431BCM5X/NOPB	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM		N09C	Samples
LMV431BIMF	NRND	SOT-23	DBZ	3	1000	TBD	Call TI	Call TI	-40 to 85	RLB	
LMV431BIMF/NOPB	ACTIVE	SOT-23	DBZ	3	1000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 85	RLB	Samples
LMV431BIMFX/NOPB	ACTIVE	SOT-23	DBZ	3	3000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 85	RLB	Samples
LMV431CM5	NRND	SOT-23	DBV	5	1000	TBD	Call TI	Call TI	0 to 70	N09B	
LMV431CM5/NOPB	ACTIVE	SOT-23	DBV	5	1000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	0 to 70	N09B	Samples



4-May-2014

Orderable Device	Status	Package Type	•	Pins	•	Eco Plan	Lead/Ball Finish	MSL Peak Temp	Op Temp (°C)	Device Marking	Samples
	(1)		Drawing		Qty	(2)	(6)	(3)		(4/5)	
LMV431CM5X/NOPB	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	0 to 70	N09B	Samples
LMV431CZ/NOPB	ACTIVE	TO-92	LP	3	1800	Green (RoHS & no Sb/Br)	SN   CU SN	N / A for Pkg Type	0 to 70	LMV431 CZ	Samples
LMV431IM5	NRND	SOT-23	DBV	5	1000	TBD	Call TI	Call TI	-40 to 85	N08B	
LMV431IM5/NOPB	ACTIVE	SOT-23	DBV	5	1000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 85	N08B	Samples
LMV431IM5X	NRND	SOT-23	DBV	5	3000	TBD	Call TI	Call TI	-40 to 85	N08B	
LMV431IM5X/NOPB	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 85	N08B	Samples
LMV431IZ/NOPB	ACTIVE	TO-92	LP	3	1800	Green (RoHS & no Sb/Br)	CU SN	N / A for Pkg Type	-40 to 85	LMV431 IZ	Samples

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes. **Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.



www.ti.com

## PACKAGE OPTION ADDENDUM

4-May-2014

<sup>(6)</sup> Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


# PACKAGE MATERIALS INFORMATION

www.ti.com


Texas Instruments

#### TAPE AND REEL INFORMATION



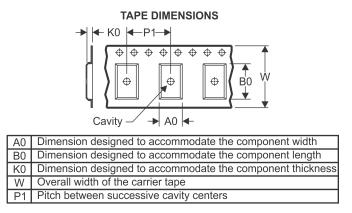

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

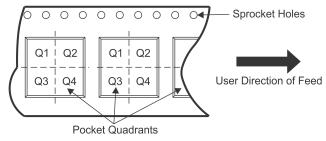

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LMV431ACM5	SOT-23	DBV	5	1000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMV431ACM5/NOPB	SOT-23	DBV	5	1000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMV431ACM5X/NOPB	SOT-23	DBV	5	3000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMV431AIM5	SOT-23	DBV	5	1000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMV431AIM5/NOPB	SOT-23	DBV	5	1000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMV431AIM5X	SOT-23	DBV	5	3000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMV431AIM5X/NOPB	SOT-23	DBV	5	3000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMV431AIMF	SOT-23	DBZ	3	1000	178.0	8.4	3.3	2.9	1.22	4.0	8.0	Q3
LMV431AIMF/NOPB	SOT-23	DBZ	3	1000	178.0	8.4	3.3	2.9	1.22	4.0	8.0	Q3
LMV431AIMFX	SOT-23	DBZ	3	3000	178.0	8.4	3.3	2.9	1.22	4.0	8.0	Q3
LMV431AIMFX/NOPB	SOT-23	DBZ	3	3000	178.0	8.4	3.3	2.9	1.22	4.0	8.0	Q3
LMV431BCM5/NOPB	SOT-23	DBV	5	1000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMV431BCM5X/NOPB	SOT-23	DBV	5	3000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMV431BIMF	SOT-23	DBZ	3	1000	178.0	8.4	3.3	2.9	1.22	4.0	8.0	Q3
LMV431BIMF/NOPB	SOT-23	DBZ	3	1000	178.0	8.4	3.3	2.9	1.22	4.0	8.0	Q3
LMV431BIMFX/NOPB	SOT-23	DBZ	3	3000	178.0	8.4	3.3	2.9	1.22	4.0	8.0	Q3
LMV431CM5	SOT-23	DBV	5	1000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMV431CM5/NOPB	SOT-23	DBV	5	1000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3


# PACKAGE MATERIALS INFORMATION



www.ti.com

23-Sep-2013

Device		Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LMV431CM5X/NOPB	SOT-23	DBV	5	3000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMV431IM5	SOT-23	DBV	5	1000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMV431IM5/NOPB	SOT-23	DBV	5	1000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMV431IM5X	SOT-23	DBV	5	3000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMV431IM5X/NOPB	SOT-23	DBV	5	3000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3

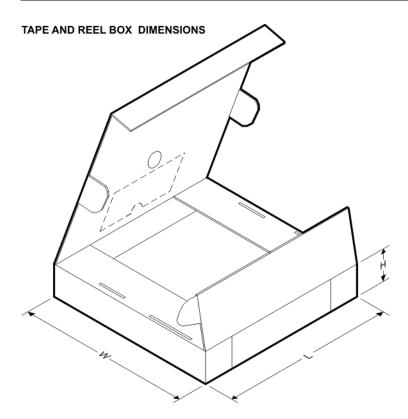

\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LMV431ACM5	SOT-23	DBV	5	1000	210.0	185.0	35.0
LMV431ACM5/NOPB	SOT-23	DBV	5	1000	210.0	185.0	35.0
LMV431ACM5X/NOPB	SOT-23	DBV	5	3000	210.0	185.0	35.0
LMV431AIM5	SOT-23	DBV	5	1000	210.0	185.0	35.0
LMV431AIM5/NOPB	SOT-23	DBV	5	1000	210.0	185.0	35.0
LMV431AIM5X	SOT-23	DBV	5	3000	210.0	185.0	35.0
LMV431AIM5X/NOPB	SOT-23	DBV	5	3000	210.0	185.0	35.0
LMV431AIMF	SOT-23	DBZ	3	1000	210.0	185.0	35.0
LMV431AIMF/NOPB	SOT-23	DBZ	3	1000	210.0	185.0	35.0
LMV431AIMFX	SOT-23	DBZ	3	3000	210.0	185.0	35.0
LMV431AIMFX/NOPB	SOT-23	DBZ	3	3000	210.0	185.0	35.0
LMV431BCM5/NOPB	SOT-23	DBV	5	1000	210.0	185.0	35.0

# PACKAGE MATERIALS INFORMATION




www.ti.com

23-Sep-2013

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LMV431BCM5X/NOPB	SOT-23	DBV	5	3000	210.0	185.0	35.0
LMV431BIMF	SOT-23	DBZ	3	1000	210.0	185.0	35.0
LMV431BIMF/NOPB	SOT-23	DBZ	3	1000	210.0	185.0	35.0
LMV431BIMFX/NOPB	SOT-23	DBZ	3	3000	210.0	185.0	35.0
LMV431CM5	SOT-23	DBV	5	1000	210.0	185.0	35.0
LMV431CM5/NOPB	SOT-23	DBV	5	1000	210.0	185.0	35.0
LMV431CM5X/NOPB	SOT-23	DBV	5	3000	210.0	185.0	35.0
LMV431IM5	SOT-23	DBV	5	1000	210.0	185.0	35.0
LMV431IM5/NOPB	SOT-23	DBV	5	1000	210.0	185.0	35.0
LMV431IM5X	SOT-23	DBV	5	3000	210.0	185.0	35.0
LMV431IM5X/NOPB	SOT-23	DBV	5	3000	210.0	185.0	35.0

DBV (R-PDSO-G5)

PLASTIC SMALL-OUTLINE PACKAGE

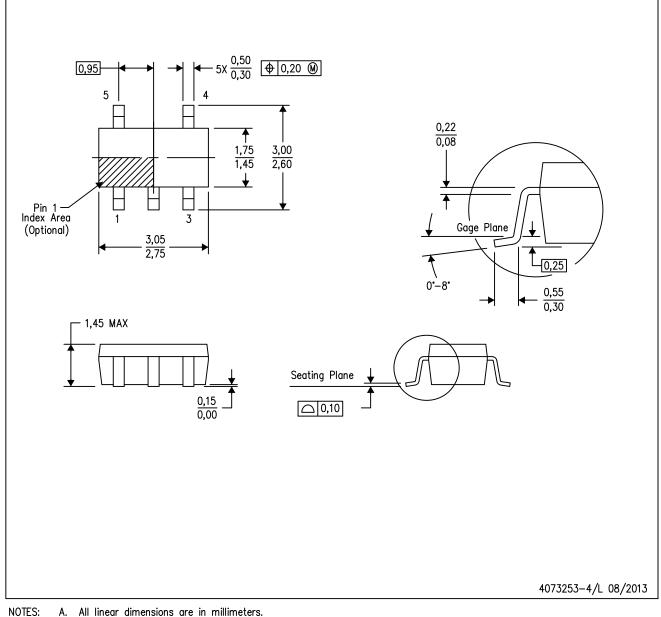

- A. All linear dimensions are in millimeters.
  - This drawing is subject to change without notice. Β.
  - Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side. C.
  - D. Falls within JEDEC MO-178 Variation AA.



DBV (R-PDSO-G5)

PLASTIC SMALL OUTLINE



NOTES:


A. All linear dimensions are in millimeters.B. This drawing is subject to change without notice.

- C. Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
- D. Publication IPC-7351 is recommended for alternate designs.
- E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Example stencil design based on a 50% volumetric metal load solder paste. Refer to IPC-7525 for other stencil recommendations.



DBZ (R-PDSO-G3)

PLASTIC SMALL-OUTLINE

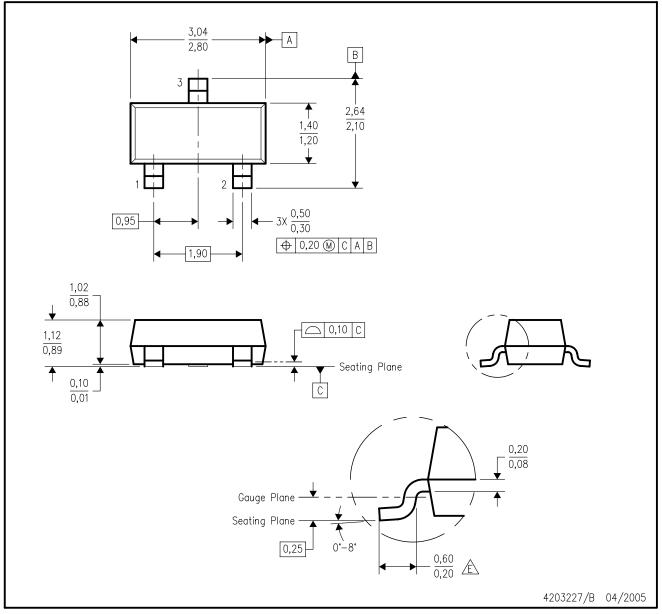

NOTES: A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.


B. This drawing is subject to change without notice.

C. Lead dimensions are inclusive of plating.

D. Body dimensions are exclusive of mold flash and protrusion. Mold flash and protrusion not to exceed 0.25 per side.

E Falls within JEDEC TO-236 variation AB, except minimum foot length.




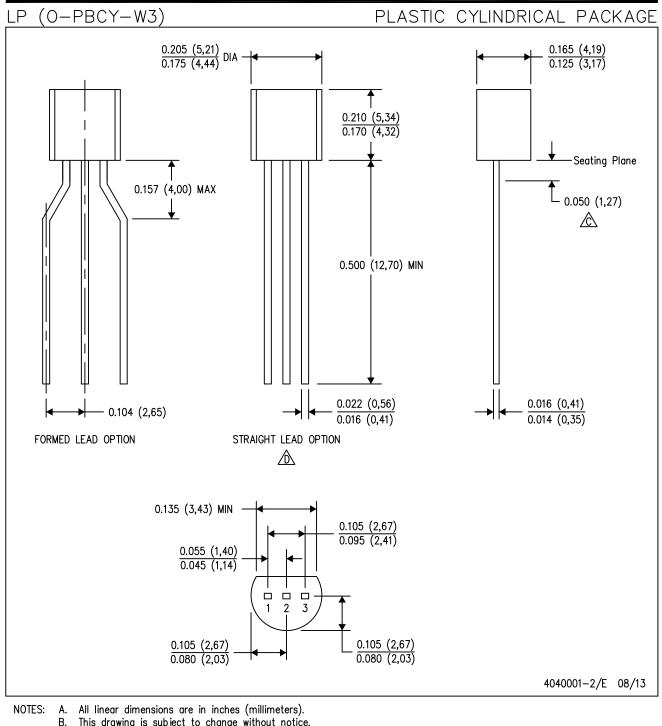

- B. This drawing is subject to change without notice.
- Lead dimensions are not controlled within this area.
- ⚠ Falls within JEDEC TO-226 Variation AA (TO-226 replaces TO-92).
- Shipping Method: E. Straight lead option available in bulk pack only. Formed lead option available in tape & reel or ammo pack. Specific products can be offered in limited combinations of shipping mediums and lead options. Consult product folder for more information on available options.



## **MECHANICAL DATA**

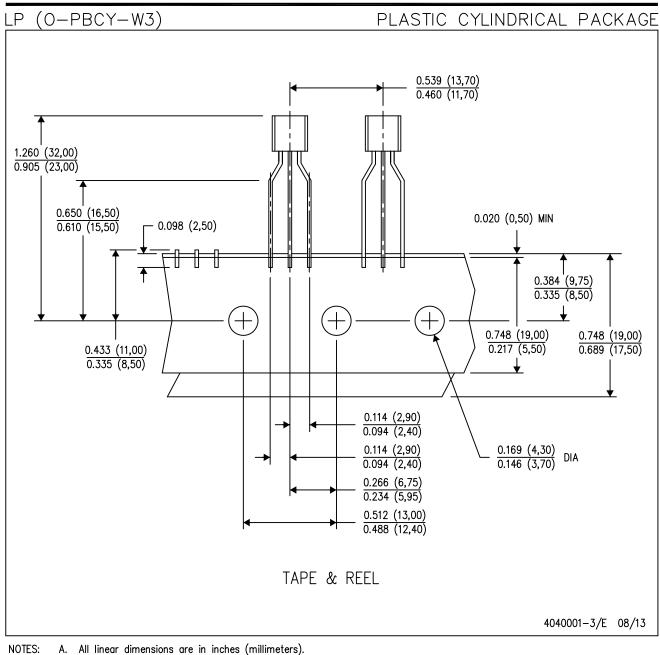

- B. This drawing is subject to change without notice.
- C. Tape and Reel information for the Formed Lead Option package.



#### **IMPORTANT NOTICE**

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have *not* been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products		Applications	
Audio	www.ti.com/audio	Automotive and Transportation	www.ti.com/automotive
Amplifiers	amplifier.ti.com	Communications and Telecom	www.ti.com/communications
Data Converters	dataconverter.ti.com	Computers and Peripherals	www.ti.com/computers
DLP® Products	www.dlp.com	Consumer Electronics	www.ti.com/consumer-apps
DSP	dsp.ti.com	Energy and Lighting	www.ti.com/energy
Clocks and Timers	www.ti.com/clocks	Industrial	www.ti.com/industrial
Interface	interface.ti.com	Medical	www.ti.com/medical
Logic	logic.ti.com	Security	www.ti.com/security
Power Mgmt	power.ti.com	Space, Avionics and Defense	www.ti.com/space-avionics-defense
Microcontrollers	microcontroller.ti.com	Video and Imaging	www.ti.com/video
RFID	www.ti-rfid.com		
OMAP Applications Processors	www.ti.com/omap	TI E2E Community	e2e.ti.com
Wireless Connectivity	www.ti.com/wirelessconne	ectivity	

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2014, Texas Instruments Incorporated