

KERN PCD 10K-3

KERN

High-resolution precision balance with removable display for maximum flexibility



Maximum creep (15 minutes)	4 g
Maximum creep (30 minutes)	8 g
Default unit	g

Display	
Display type	LCD
Display backlight	✓
Display digit height	21 mm
Languages of the user interface	English

Construction	
Dimension housing (W×D×H)	165×280×75 mm
Dimensions device (W×D×H)	165×280×75 mm
Dimensions completely mounted (W×D×H)	165×280×75 mm
Dimension display device (W×D×H)	140×46×75 mm
Dimensions weighing surface (W×D)	160×160 mm
Dimensions weighing surface	160×160 mm
Dimensions weighing platform (W×D×H)	165×165×73 mm
Material housing	plastic
Material weighing plate	stainless steel
Material display housing	plastic
Level indicator	✓
Levelling feet adjustable	✓
Stand height	250 mm
Stand inclinable	✓
Display device cable length	1,2 m

Functions	
Recipe/summing level	Rez A (Net total)
Percentage determination	✓
Underfloor weighing	None
Function for averaging under unstable weighing conditions	✓
Counting function	✓
Counting resolution (laboratory conditions)	5.000
Smallest piece weight when piece counting - laboratory conditions	2 g
Smallest piece weight when piece counting - normal conditions	20 g
Reference quantity	5, 10, 20, 25, 50
Peak function	✓
Auto-off interval(s) in battery mode/rechargeable battery mode	3 min off

Category	
Brand	KERN
Product category	Laboratory balance
Product group	Precision balance
Product family	PCD

Measuring System	
Weighing system	Strain gauge
Weighing capacity [Max]	10000 g
Readability [d]	1 g
Reproducibility	1 g
Linearity	± 3 g
Resolution	10.000
Tare range	10000 g
Adjustment options	Adjusting with external weight
Recommended adjusting weight	10 kg (M1)
Possible calibration points	2 kg; 5 kg; 7 kg; 10 kg
Stabilization time	3 s
Warm-up time	30 min
Eccentric loading at 1/3 [Max]	5 g
USP Minimum weight of sample (k = 2, U = 0.1%)	2 kg
Construction type of the scale	Single-range balance
Units	g dwt tl (Tw) tl (HK) ozt mo lb oz ffa tol

KERN PCD 10K-3



High-resolution precision balance with removable display for maximum flexibility

Auto-off interval(s) in mains power mode off

Tare function manual (multi)

Number of keys for operation 5

Interface

Interfaces RS-232 standard

Power Supply

Supplied power supply Power supply unit

Power supply type Power adapter

Plug-in power supply / adapter for countries - included with the delivery EURO
UK
US
CH

Plug-in power supply / adapter for countries - optional US

Input voltage power supply / power [Max] 220 V - 240 V AC, 50 Hz

Power supply cable removable removable

Input voltage device / power [Max] 9 V, 300 mA

Power socket for mains adapter Hollow plug, inside minus, Ø inside 2,1 mm, Ø outside 5,5 mm, long 12 mm

Battery 9 V block

Battery connection Plug-in terminals

Battery operating time 12 h

Rechargeable battery PCD-A04

Rechargeable battery operating time - backlight on 12 h

Rechargeable battery operating time - backlight off 24 h

Rechargeable battery charging time 10 h

Rechargeable battery optional Rchrg. battery optional

Environmental conditions

Ambient temperature [Min] 5 °C

Ambient temperature [Max] 35 °C

Humidity of environment [Max] 80 %

Storage temperature [Min] -20 °C

Storage temperature [Max] 60 °C

Approval

CE mark ✓

Services (optional)

Article number for adjustment at the location of installation 961-248

Article number for DAkkS calibration 963-128

Article number for certificate of conformity 969-517

Packing & Shipping

Delivery time 1 d

Dimensions packaging (W×D×H) 250×360×165 mm

Shipping method Parcel service

Net weight approx. 1,8 kg

Gross weight approx. 2,6 kg


Shipping weight 3 kg

Product information

GTIN/EAN number 4045761192027

Pictograms

STANDARD

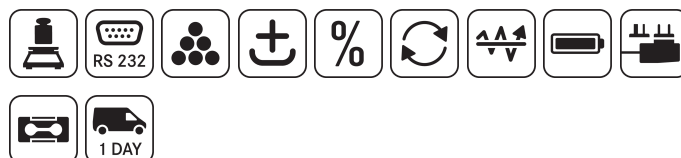

OPTION

