


ASME B 18.3

Hexagon socket head cap screws*
Zylinderschrauben mit Innensechskant
und zölligem Gewinde

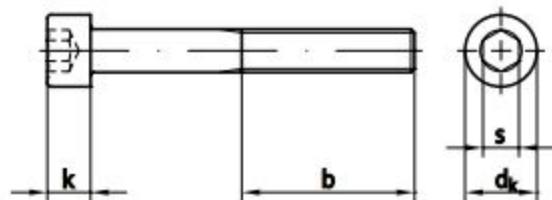

alle Maße in inch,

*nach ASME B 18.3: 2003 Tabelle 1A

Maße	#2	#4	#5	#6	#8	#10	1/4	5/16
d	0,086	0,112	0,125	0,138	0,164	0,190	0,250	0,3125
d _k	0,140	0,183	0,205	0,226	0,270	0,312	0,375	0,469
k	0,086	0,112	0,125	0,138	0,164	0,190	0,250	0,312
s	5/64	3/32	3/32	7/64	9/64	5/32	3/16	1/4
b	0,62	0,75	0,75	0,75	0,88	0,88	1,00	1,12

Maße	3/8	1/2	5/8	7/8	1	1 1/4	1 1/2	
d	0,375	0,500	0,625	0,875	1,000	1,250	1,500	
d _k	0,562	0,750	0,938	1,312	1,500	1,875	1,250	
k	0,375	0,500	0,625	0,875	1,000	1,250	1,500	
s	5/16	3/8	1/2	3/4	3/4	7/8	1	
b	1,25	1,50	1,75	2,25	2,50	3,12	3,75	