



# ND20 METER OF NETWORK PARAMETERS

**FEATURES:**

**INPUT:**

**OUTPUTS:**

**GALVANIC ISOLATION:**


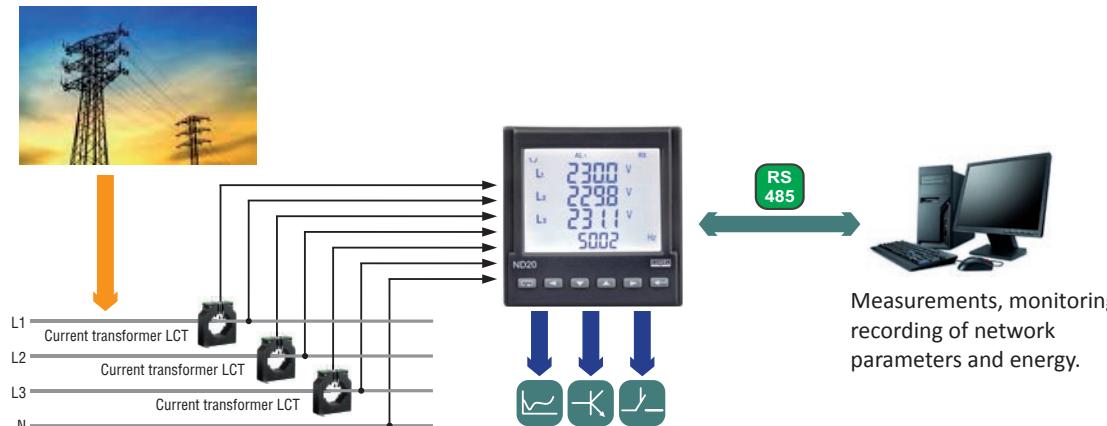
**Export department:**  
+48 68 45 75 139 / 305 /  
321 / 368

**Fax:** +48 68 32 54 091  
**e-mail:** export@lumel.com.pl

"LUMEL" S.A.  
ul. Ślubińska 1  
65-127 Zielona Góra  
POLAND  
**WWW.LUMEL.COM.PL**



- Measurement of power network parameters in 2,3 or 4-wire balanced and unbalanced systems.
- High accuracy class.
- Indications considering values of programmed ratios.
- Harmonics of voltages and currents (selectively).
- THD factors for currents and voltages.
- Profile of 15, 30, 60-minutes' power (9000 measurements).
- Watt-hour meter for the selected harmonic.
- Backlit LCD 3.5" screen.
- Protection grade from the frontal side: IP65.
- Digital transmission to the master system through the RS-485 interface (MODBUS).
- Configurable analog, alarm and pulse outputs (energy).
- Configuration of displayed pages.

**EXAMPLE OF APPLICATION**

**MEASURED QUANTITIES AND MEASURING RANGES**

| Measured value             | Indication range*        | Measuring range                       | L1                                       | L2 | L3 | $\Sigma$ | Basic error    |
|----------------------------|--------------------------|---------------------------------------|--|----|----|----------|----------------|
| Current In                 | 1 A<br>5 A               | 0.00 ... 12 kA<br>0.00 ... 60 kA      | 0.002 ... 1.200 A~<br>0.010 ... 6.000 A~ | ●  | ●  | ●        | $\pm 0.2\% r$  |
| Voltage L-N                | 57,7 V<br>230 V          | 0.0 ... 280 kV<br>0.0 ... 1.104 MV    | 2.8 ... 70.0 V~<br>11.5 ... 276 V~       | ●  | ●  | ●        | $\pm 0.2\% r$  |
| Voltage L-L                | 100 V<br>400 V           | 0.0 ... 480 kV<br>0.0 ... 1.92 MV     | 5 ... 120 V~<br>20 ... 480 V~            | ●  | ●  | ●        | $\pm 0.5\% r$  |
| Frequency                  |                          | 47.0 ... 63.0 Hz                      | 47.0 ... 63.0 Hz                         | ●  | ●  | ●        | $\pm 0.2\% mv$ |
| Active power               |                          | -9999 MW ... 0.00 W ... 9999 MW       | -1.65 kW ... 1.4 W ... 1.65 kW           | ●  | ●  | ●        | $\pm 0.5\% r$  |
| Reactive power             |                          | -9999 Mvar ... 0.00 var ... 9999 Mvar | -1.65 kvar ... 1.4 var ... 1.65 kvar     | ●  | ●  | ●        | $\pm 0.5\% r$  |
| Apparent power             |                          | 0.00 VA ... 9999 MVA                  | 1.4 VA ... 1.65 kVA                      | ●  | ●  | ●        | $\pm 0.5\% r$  |
| Power factor PF            |                          | -1 ... 0 ... 1                        | -1 ... 0 ... 1                           | ●  | ●  | ●        | $\pm 1\% r$    |
| Tangent $\phi$             |                          | -1.2 ... 0 ... 1.2                    | -1.2 ... 0 ... 1.2                       | ●  | ●  | ●        | $\pm 1\% r$    |
| Cosinus $\phi$             |                          | -1 ... 1                              | -1 ... 1                                 | ●  | ●  | ●        | $\pm 1\% r$    |
| $\phi$                     |                          | -180 ... 180                          | -180 ... 180                             | ●  | ●  | ●        | $\pm 0.5\% r$  |
| Imported active energy     | 0 ... 99 999 999.9 kWh   |                                       |  |    |    | ●        | $\pm 0.5\% r$  |
| Exported active energy     | 0 ... 99 999 999.9 kWh   |                                       |  |    |    | ●        | $\pm 0.5\% r$  |
| Reactive inductive energy  | 0 ... 99 999 999.9 kvarh |                                       |  |    |    | ●        | $\pm 0.5\%$    |
| Reactive capacitive energy | 0 ... 99 999 999.9 kvarh |                                       |  |    |    | ●        | $\pm 0.5\%$    |
| THD                        | 0 ... 100%               | 0 ... 100%                            | ●  | ●  | ●  |          | $\pm 5\%$      |

\* Depending on the set tr\_U ratio (ratio of the voltage transformer: 0.1...4000.0) and tr\_I ratio (ratio of the current transformer: 1...10000)  
r - of the range      mv - of the measured value

**OUTPUTS**

| Kind of output                            | Properties   |
|---|--|
| Analog output                             | • 1 programmable current output 0/4...20 mA  |
| Relay output                              | • programmable relay output, normally open voltageless contacts, load capacity 250 V~/0.5 A~ |
| Pulse output of active or reactive energy | • 1 OC type, passive   |

| DIGITAL INTERFACE   |  |                      |   |  |  |
|---|--|----------------------|---|--|--|
| Interface type  | Transmission protocol  | Mode                 | Baud rate   |  |  |
| RS-485  | MODBUS RTU   | 8N2, 8E1, 8O1, 8N1   | 4.8; 9.6; 19.2; 38.4 kbit/s                                   |  |  |
| EXTERNAL FEATURES   |  |                      |   |  |  |
| Readout field   | LCD 3.5" screen, specialized, monochromatic with backlit                           |                      |   |  |  |
| Weight  | < 0.3 kg   |                      |   |  |  |
| Overall dimensions  | 96 × 96 × 77 mm  |                      | panel cut-out: 92.5 <sup>+0.6</sup> × 92.5 <sup>+0.6</sup> mm |  |  |
| Protection grade (acc. to EN 60529)   | from frontal side: IP65  |                      | from terminal side: IP20                                      |  |  |
| RATED OPERATING CONDITIONS  |  |                      |   |  |  |
| Supply voltage  | 85...253 V a.c., 90...300 V d.c.,<br>20...40 V a.c., 20...60 V d.c.                |                      |   |  |  |
| Temperature   | ambient: -25...+55°C   |                      | storage: -30...70°C   |  |  |
| Relative humidity   | 25...95%   |                      | inadmissible condensation                                     |  |  |
| Operating position  | any  |                      |   |  |  |
| External magnetic field   | 0...40...400 A/m   |                      |   |  |  |
| Short duration overload (1 s)   | voltage input: 2Un (max. 1000 V)   | current input: 10 In |   |  |  |
| Power consumption   | - in the supply circuit ≤ 6 VA,<br>- in the voltage and current circuits ≤ 0.05 VA |                      |   |  |  |
| SAFETY AND COMPATIBILITY REQUIREMENTS   |  |                      |   |  |  |
| Electromagnetic compatibility   | noise immunity   | acc. to EN 61000-6-2 |   |  |  |
|   | noise emissions  | acc. to EN 61000-6-4 |   |  |  |
| Safety requirements   |  | acc. to EN 61010-1   |   |  |  |
| ELECTRIC CONNECTIONS  |  |                      |   |  |  |
|   |  |                      |   |  |  |
| <b>Connections:</b><br>- direct, semi-indirect and indirect one-phase measurement,<br>- direct measurement in a 3-wire network,<br>- semi-indirect measurement in a 3-wire network,<br>- indirect measurement with the use of 3 current transformers and 2 or 3 voltage transformers in a 3-wire network,<br>- direct measurement in a 4-wire network,<br>- semi-indirect measurement in a 4-wire network,<br>- indirect measurement with the use of 3 current transformers and 2 or 3 voltage transformers in a 4-wire network |  |                      |   |  |  |
| <b>Fig 1. Meter connection diagrams in a 4-wire network.</b>  |  |                      |   |  |  |
| ORDERING  |  |                      |   |  |  |
| ANALYSER OF NETWORK PARAMETER ND20 -  | X  | X                    | X   |  |  |
| Current input In:   | X  | X                    | X   |  |  |
| 1 A (X/1)   | 1  |                      |   |  |  |
| 5 A (X/5)   | 2  |                      |   |  |  |
| Voltage input (phase/ phase-to-phase) Un:   |  |                      |   |  |  |
| 3 x 57.7/100 V  | 1  |                      |   |  |  |
| 3 x 230/400 V   | 2  |                      |   |  |  |
| Analog current output:  |  |                      |   |  |  |
| without analog output   | 0  |                      |   |  |  |
| with programmable output 0(4) ... 20 mA   | 1  |                      |   |  |  |
| Supply voltage:   |  |                      |   |  |  |
| 85...253 V a.c., 90...300 V d.c.  | 1  |                      |   |  |  |
| 20...40 V a.c., 20...60 V d.c.  | 2  |                      |   |  |  |
| Version:  |  |                      |   |  |  |
| standard  | 00   |                      |   |  |  |
| custom-made*  | XX   |                      |   |  |  |
| Language:   | P  | E                    | X   |  |  |
| Polish  | P  |                      |   |  |  |
| English   | E  |                      |   |  |  |
| other*  | X  |                      |   |  |  |
| Acceptance tests:   |  |                      |   |  |  |
| without extra quality requirements  | 0  |                      |   |  |  |
| with an extra quality inspection certificate<br>acc. to customer's request*   | 1  |                      |   |  |  |
|   | X  |                      |   |  |  |

**EXAMPLE OF ORDER:**

The code ND20 - 2 2 1 1 0 0 E 0 means:

- ND20 - meter of network parameters of ND20 type
- 2 - current input: 5A (X/5)
- 2 - input voltage (phase/phase-to-phase) Un = 3 x 230 V / 400 V
- 1 - with programmable analog output
- 1 - supply voltage: 85...253 V a.c. / 90...300 V d.c.
- 00 - standard version
- E - all descriptions and user's manual in English
- 0 - without extra quality requirements.

\* - after agreeing with the manufacturer

**SEE ALSO:**

Free LPConfig program for programming LUMEL's products. Available on our internet website.



Current  
transformers.



P43 - three-phase  
transducer of power  
network parameters.

**OUR OFFER**
[www.lumel.com.pl](http://www.lumel.com.pl)

For more information about LUMEL's products please visit our website:  
[www.lumel.com.pl](http://www.lumel.com.pl)

**Export department:**

+48 68 45 75 139 / 305 /

321/368

Fax: +48 68 32 54 091

e-mail: [export@lumel.com.pl](mailto:export@lumel.com.pl)

„LUMEL” S.A.

ul. Ślubicka 1

65-127 Zielona Góra

POLAND

**WWW.LUMEL.COM.PL**