

# Product Environmental Profile

**ATV320 - 7.5kW 200V 3ph  
Compact control variable speed drive**

**ATV320 - 5.5kW/7.5kW 200V/600V 3ph  
Compact control variable speed drive**






## General information

Representative product	ATV320 - 7.5kW 200V 3ph compact control -ATV320U75M3C
Description of the product	To control the speed and variate of an synchronous electric motor for general application
Description of the range	ATV320 - 5.5kW/7.5kW 200V/600V 3ph compact control The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with a similar technology.
Functional unit	To control the speed and variate of an synchronous electric motor for general application during 10 years and a 46% use rate, in accordance with the relevant standards.



## Constituent materials

Reference product mass 3600 g including the product, its packaging and additional elements and accessories

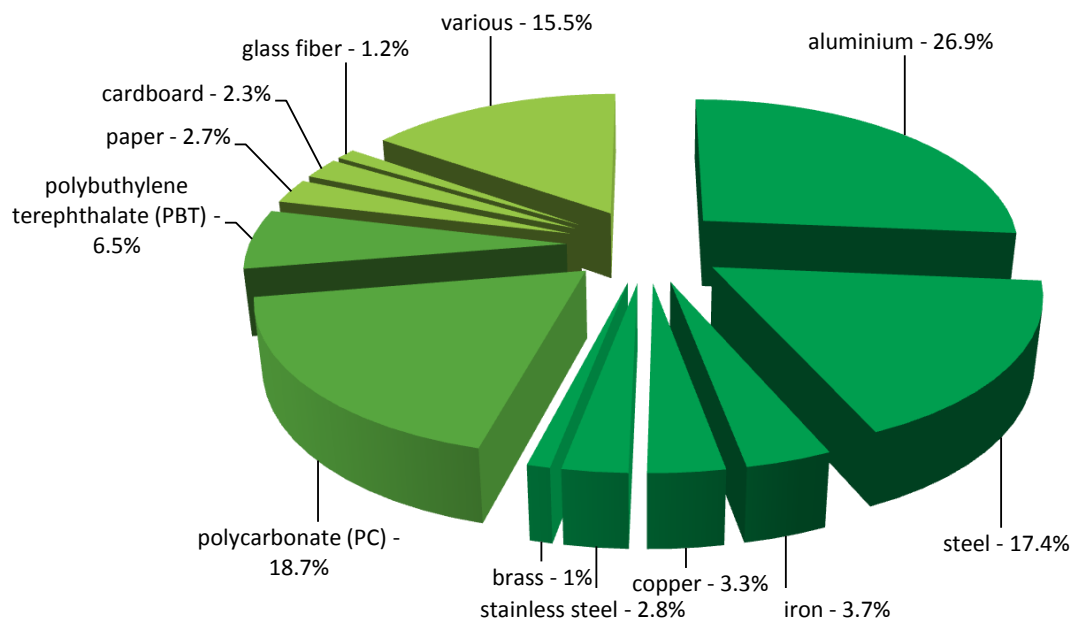

## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



## Additional environmental information

The ATV320 - 7.5kW 200V 3ph compact control presents the following relevant environmental aspects

<b>Design</b>	Products are designed to be "Green Premium".
<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 149.8 g, consisting of cardboard (53.40%), paper (45.93%), packaging label (0.67%) Packaging recycled materials is 4.16% of total packaging mass. Product distribution optimised by setting up local distribution centres
<b>Installation</b>	Does not require any special installation operations
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials  This product contains Electronic card(665.97g) Electronia capacitor(399.50g) Cable (6.88g) Steel (536.85g) Alumimium (762.74g) PC (788.32g) Cardbord (80.00g) that should be separated from the stream of waste so as to optimize end-of-life treatment.  The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website  <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a>  Recyclability potential: <b>68%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).



## Environmental impacts


<b>Reference life time</b>	10 years
<b>Product category</b>	Active products
<b>Installation elements</b>	No special components needed
<b>Use scenario</b>	Consumed power is 304.8 W 46 % of the time in Active mode, 0 W 54 % of the time in Standby mode, 0 W 0 % of the time in Sleep mode and 0 W 0 % of the time in Off mode.  The product is in active mode 46% of the time with a power use of 304.8W and in stand-by mode 54% of the time with a power use of 0.0W, for 10 years.
<b>Geographical representativeness</b>	Worldwide
<b>Technological representativeness</b>	To control the speed and variate of an synchronous electric motor for general application
	<b>Manufacturing</b> <b>Installation</b> <b>Use</b> <b>End of life</b>

<b>Energy model used</b>	Energy model used: Indonesia	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27
--------------------------	------------------------------	---	---	---

Compulsory indicators		ATV320 - 7.5kW 200V 3ph compact control - ATV320U75M3C					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	3,70E-02	3,66E-02	0*	0*	3,30E-04	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	5,50E+01	1,31E-01	0*	0*	5,48E+01	0*
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	2,08E+00	2,37E-02	4,88E-04	0*	2,06E+00	4,18E-04
Contribution to global warming	kg CO <sub>2</sub> eq	7,31E+03	5,73E+01	0*	0*	7,25E+03	9,03E-01
Contribution to ozone layer depletion	kg CFC11 eq	1,77E-03	6,55E-06	0*	0*	1,76E-03	0*
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	2,61E+00	1,43E-02	0*	0*	2,59E+00	0*

Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	1,95E+01	6,21E-01	0*	0*	1,89E+01	0*
Total Primary Energy	MJ	1,48E+05	1,12E+03	0*	0*	1,47E+05	0*

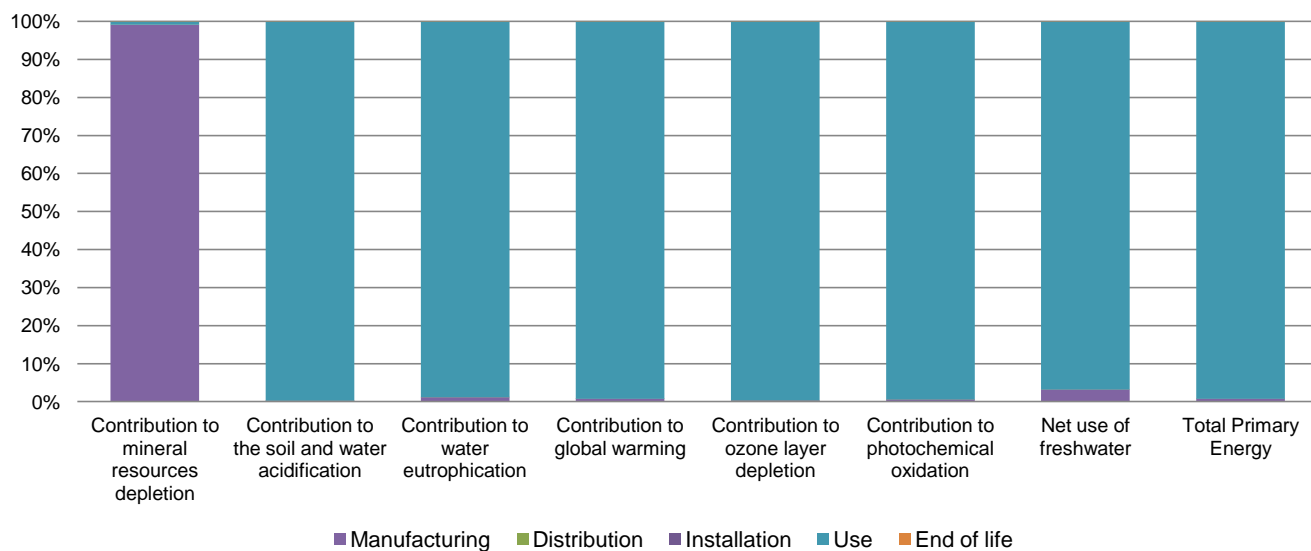

Optional indicators		ATV320 - 7.5kW 200V 3ph compact control - ATV320U75M3C					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	7,54E+04	6,95E+02	0*	0*	7,47E+04	0*
Contribution to air pollution	m <sup>3</sup>	3,18E+05	6,78E+03	0*	0*	3,11E+05	4,39E+01
Contribution to water pollution	m <sup>3</sup>	3,13E+05	8,13E+03	7,64E+01	0*	3,04E+05	7,12E+01

Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	7,21E-01	7,21E-01	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1,05E+04	1,47E+01	0*	0*	1,05E+04	0*
Total use of non-renewable primary energy resources	MJ	1,38E+05	1,11E+03	0*	0*	1,36E+05	0*
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1,05E+04	1,31E+01	0*	0*	1,05E+04	0*
Use of renewable primary energy resources used as raw material	MJ	1,65E+00	1,65E+00	0*	0*	0*	0*



Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1,37E+05	1,06E+03	0*	0*	1,36E+05	0*
Use of non renewable primary energy resources used as raw material	MJ	4,53E+01	4,53E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
<b>Waste categories</b>	<b>Unit</b>	<b>Total</b>	<b>Manufacturing</b>	<b>Distribution</b>	<b>Installation</b>	<b>Use</b>	<b>End of Life</b>
Hazardous waste disposed	kg	7,94E+01	7,34E+01	0*	3,00E-01	0*	5,66E+00
Non hazardous waste disposed	kg	2,73E+04	1,58E+02	0*	0*	2,71E+04	0*
Radioactive waste disposed	kg	2,21E+01	1,52E-02	0*	0*	2,21E+01	0*
<b>Other environmental information</b>	<b>Unit</b>	<b>Total</b>	<b>Manufacturing</b>	<b>Distribution</b>	<b>Installation</b>	<b>Use</b>	<b>End of Life</b>
Materials for recycling	kg	2,66E+00	3,20E-01	0*	0*	0*	2,34E+00
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	1,02E+00	8,64E-01	0*	4,00E-03	0*	1,54E-01
Exported Energy	MJ	4,10E-02	4,10E-02	0*	0*	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.5, database version 2015-04.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range.

The mineral resources depletion of the product of the family maybe proportional extrapolated by mass of product.

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration N°	ENVPEP1604022_V1	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	04/2016		
Validity period	5 years	Information and reference	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	X	External	
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			
Environmental data in alignment with EN 15804 : 2012 + A1 : 2013			

Schneider Electric Industries SAS

Customer Care Center  
[www.schneider-electric.com/contact](http://www.schneider-electric.com/contact)  
 35, rue Joseph Monier  
 CS 30323  
 F- 92506 Rueil Malmaison Cedex  
 RCS Nanterre 954 503 439  
 Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric

ENVPEP1604022\_V1

© 2015 - Schneider Electric – All rights reserved

04/2016