


# Anybus<sup>®</sup>

BY HMS NETWORKS

1.

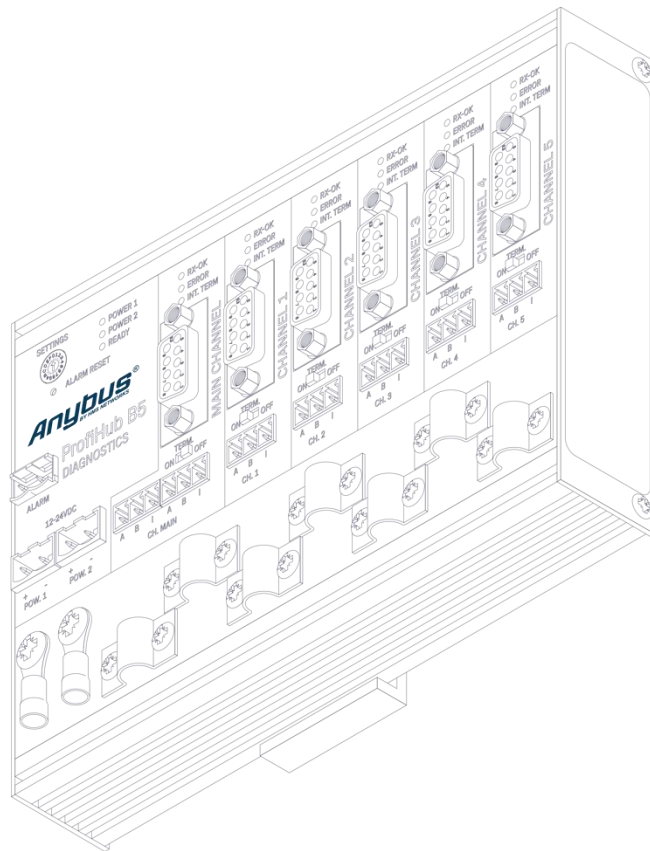

# Content

- 1. Introduction..... 3
- 2. Installation instructions ..... 4
- 3. Power supply ..... 5
- 4. PROFIBUS..... 5
- 5. Technical Data ..... 7

# B1 Repeater

## Installation manual

## 2. Introduction

**The compact PROFIBUS DP Repeater B1 offers an economic alternative and tackles the technological limitations of the existing repeaters. This first-class network component fulfils the electrical, mechanical and diagnostic requirements of the demanding modern industry.**

The advanced 12 Mbps core of the B1 is identical to the ProfiHub; it can be cascaded unlimitedly and is equipped with the latest isolated RS 485 interface. The data is constantly monitored for glitches which are digitally filtered out. Every channel has on-board switchable termination and can drive 31 devices.

The removable screw terminals of the PROFIBUS interface are pinned-out in a way that reversal mounting does not impact existing wiring. A DB9 connector is provided for ProfiTrace or other maintenance/engineering tools.

The power supply is redundant which makes it suitable for applications in which high availability is required and consumes relatively low power which helps the environment.

### 3. Installation instructions

#### Location

The B1 can be installed everywhere in a non-hazardous area that complies with IP 20 (DIN 40 050) and the specified temperature range of -20 to +60 ° Celsius.

#### Position

The B1 can be installed in every position, but it is recommended to install it with Channel 2 pointing down. In this position it is easier to read the status display and to perform measurements on the DB9 connector.

#### Mounting and dismounting

The B1 has to be mounted on a 35 mm DIN-rail with a minimum width of 60 mm. Fig. 1 and Fig. 2 illustrate how to mount and dismount the B1 on and from the DIN-rail.

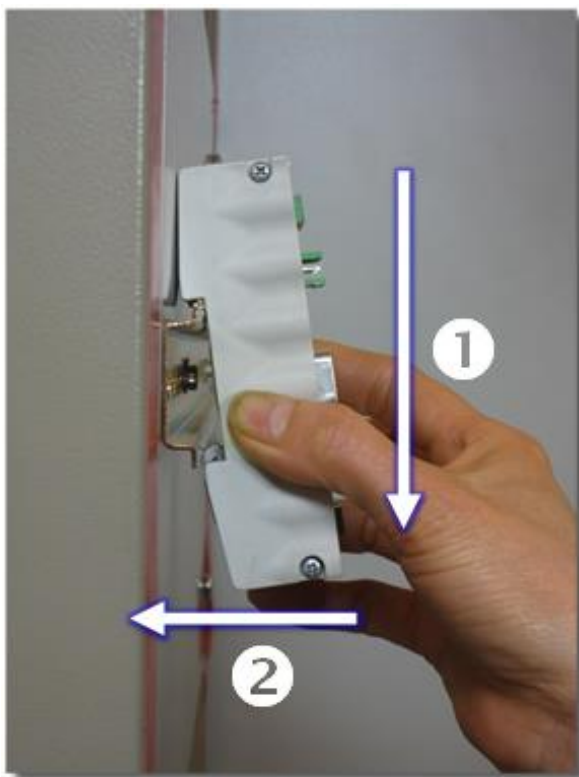


Fig. 1 Mounting; pull-down and push

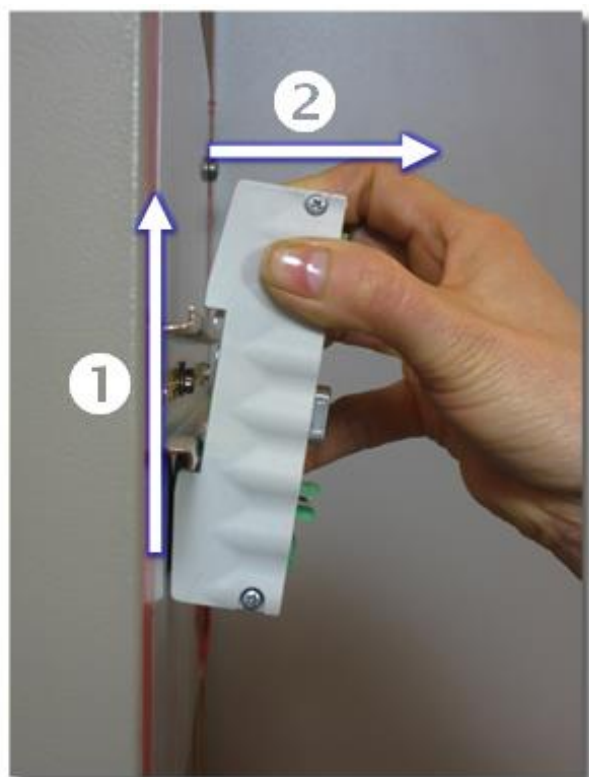


Fig. 2 Dismounting; Push-up and pull

## 4. Power supply

### Parameters

The power supply has to comply with the following specifications:

Voltage: **19 to 28 Vdc**

Current: **Min. 65 mA**

### Wiring

The leads of both power connectors have to be wired as follows:

“+” = Positive Voltage

“-” = 0 V

SH = Earth

### Redundancy

Both power connectors are linked 1-on-1 to the internal power supply of the B1. If 1 power supply would fail, the other takes over without delay time. When redundancy is not required, it is sufficient to use 1 power connector. When the B1 is flipped 180°, the connectors can be used without alteration. Fig. 3 illustrates the location of the power supply connectors.

## 5. PROFIBUS

### Connectors

Each channel has 2 connectors (IN and OUT). They are both linked 1-on-1 when the termination is OFF.

When a channel of the repeater is NOT the last device on the segment, it doesn't matter which connector is utilized.

**When the termination is ON the OUT connector is NOT connected.**

When the B1 is flipped 180°, the wired connectors can be used without alteration.

### Pin layout

Pin “A1/2”: Green wire

Pin “B1/2”: Red wire

Pin “SH”: Cable shielding

### Termination

Each channel has its own termination which can be switched ON/OFF.

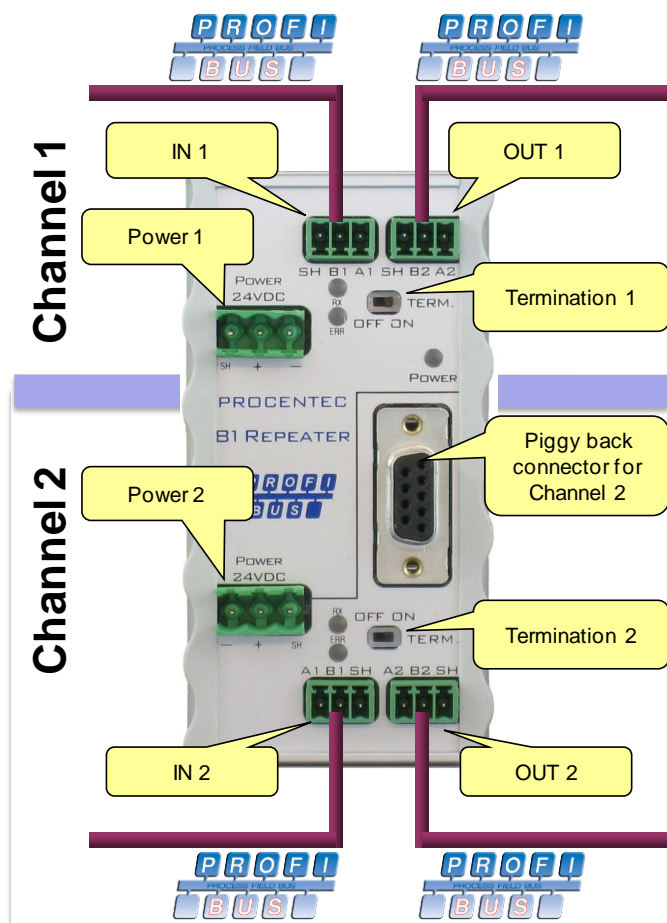


Fig. 3 Structure of the B1

### Piggy back connector

The piggy back connector is 1-on-1 with channel 2.



Fig. 4 Using the Ground Clip

### Ground Clip

It is recommended to use the supplied GC-01 ground clip to attach the cable shield to the screw connector, as shown in fig. 4, for easier shield connection and better strain relief.

The Ground Clip GC-01 can be ordered separately per 25pcs with order code: **101-00201B**.

### Diagnose-LEDs

	OFF	Blinking	ON
<b>POWER</b>	☹️ Power is OFF or an internal failure.	☹️ Power supply not stable or an internal failure.	😊 Power supply OK.
<b>RX</b>	☹️ No communication detected (this Channel).	😊 1 or more devices communicating (this Channel).	😊 1 or more devices communicating (this Channel).
<b>ERR</b>	😊 No problem has been detected.	☹️ Communication problem (this Channel).	☹️ Communication problem (this Channel).

## 6. Technical Data

Technical Data ProfiHub B1	
<b>Dimensions and weight</b>	
Dimensions L x W x H (mm)	106 x 55 x 37 mm (excluding DIN-rail and plug-able screw connectors)
Weight	125 g (excluding plug-able screw connectors and packing material).
Mounting DIN-rail type	35mm x 7,5mm (EN 50022, BS 5584, DIN 46277-3)
<b>Ambient conditions</b>	
Operating temperature	-20 to +60° Celsius -4 to +140° Fahrenheit
Isolation class	IP 20 (IEC/EN 60529, DIN 40050)
<b>Protocol specifications</b>	
Supported Protocols	DP-V0, DP- V1, DP-V2, FDL, MPI, FMS, PROFIsafe, PROFIdrive and any other FDL based protocol.
Transmission speed	9.6 kbps to 12 Mbps (including 45.45 kbps)
Transmission speed detection	Auto detect
Transmission speed detection time	< 10 s detection and 50 s baudrate switchover time.
Data delay time	At baudrate 9.6 - 500 kbps                      2.8 Tbit 1.5 Mbps                                3.2 Tbit 3 Mbps                                    3.9 Tbit 6 Mbps                                    4.6 Tbit 12 Mbps                                   6.4 Tbit
Deviation	2 bit times (over the complete message) for received messages is allowed and is corrected to nominal speed when transmitted.

<p><b>PROFIBUS cable specifications</b></p> <p>Cable lengths</p> <p>Wire diameter</p> <p>Wire type</p> <p>Number of devices</p> <p>Termination</p> <p>Cascading depth</p> <p>Cascading units</p>	<p>1200 m at 9.6 kbps to 93.75 kbps  1000 m at 187.5 kbps  400 m at 500 kbps  200 m at 1.5 Mbps  100 m at 3 Mbps to 12 Mbps</p> <p>&lt; 2.5 mm<sup>2</sup>  Stranded or Solid core</p> <p>Max. 31 per Channel (including ProfiHubs, OLMs, Laptops/PCs, etc.)</p> <p>Integrated and switchable.  Powered according to IEC 61158 (390/220/390 Ohms)</p> <p>No limit (only limited by busparameters of the master)</p> <p>With standard busparameters:</p> <table border="0"> <thead> <tr> <th>At baudrate</th> <th>units</th> </tr> </thead> <tbody> <tr> <td>9.6 kbps</td> <td>7</td> </tr> <tr> <td>19.2 kbps</td> <td>7</td> </tr> <tr> <td>45.45 kbps</td> <td>42</td> </tr> <tr> <td>93.75 kbps</td> <td>7</td> </tr> <tr> <td>187.5 kbps</td> <td>7</td> </tr> <tr> <td>500 kbps</td> <td>17</td> </tr> <tr> <td>1.5 Mbps</td> <td>23</td> </tr> <tr> <td>3 Mbpps</td> <td>19</td> </tr> <tr> <td>6 Mbps</td> <td>16</td> </tr> <tr> <td>12 Mbps</td> <td>15</td> </tr> </tbody> </table> <p>Formula to calculate number of cascading units with adjusted Tslot :</p> <p>Cascading units = (Tslot - maxTsdr) / (2 × Tdata_delay_time)</p> <p>Tdata_delay_time is described in protocol specifications on previous page.</p> <p>Example 1.5 Mbps, normal mode:</p> <p>Cascading units = (300-150) / (2x3.2) = 23</p>	At baudrate	units	9.6 kbps	7	19.2 kbps	7	45.45 kbps	42	93.75 kbps	7	187.5 kbps	7	500 kbps	17	1.5 Mbps	23	3 Mbpps	19	6 Mbps	16	12 Mbps	15
At baudrate	units																						
9.6 kbps	7																						
19.2 kbps	7																						
45.45 kbps	42																						
93.75 kbps	7																						
187.5 kbps	7																						
500 kbps	17																						
1.5 Mbps	23																						
3 Mbpps	19																						
6 Mbps	16																						
12 Mbps	15																						
<p><b>Power supply specifications</b></p> <p>Power supply operating voltage</p> <p>Power supply absolute max. rated voltage</p> <p>Redundant power supply</p> <p>Current consumption</p> <p>Power dissipation</p> <p>Reverse polarity protection</p> <p>Cable thickness</p>	<p>24 VDC</p> <p>19 to 28 VDC</p> <p>Yes</p> <p>65 mA at 24 VDC power supply</p> <p>Max. 2 W</p> <p>Yes</p> <p>&lt; 2.5 mm<sup>2</sup></p>																						



<p><b>Connector lay-out</b></p> <p>2x Power supply</p> <p>PROFIBUS screw terminals CH1 to 2</p> <p>PROFIBUS DB9 Main Channel</p>	<p>Plug-able screw connector, pitch 5,08 mm</p> <p>Pin - : 0 VDC</p> <p>Pin + : 24 VDC</p> <p>Pin SH : Shield</p> <p>Plug-able screw terminal, pitch 3,81 mm</p> <p>Pin A: PROFIBUS A (green wire)</p> <p>Pin B: PROFIBUS B (red wire)</p> <p>Pin SH : Shield</p> <p>D Sub connector, 9 contacts (PROFIBUS specification)</p> <p>Pin 1: N.C.</p> <p>Pin 2: N.C.</p> <p>Pin 3: PROFIBUS - B</p> <p>Pin 4: PROFIBUS - RTS</p> <p>Pin 5: GND</p> <p>Pin 6: VPP</p> <p>Pin 7: N.C.</p> <p>Pin 8: PROFIBUS - A</p> <p>Pin 9: N.C.</p> <p>Housing: Shield</p> <p>Shield is connected internally to the DIN-rail</p>
<p><b>Standards and approvals</b></p> <p>CE</p> <p>FCC</p> <p>UL</p>	<p>EMC Directive 2014/30/EU, class A Digital Device</p> <p>RoHs Directive 2011/65/EU</p> <p>47 CFR 15, Unintentional Radiator, class A Digital Device.</p> <p>Report reference: E365044-A1-UL</p> <p>Standards for safety: UL 60950-1, Information Technology Equipment - Safety - Part 1 General Requirements</p> <p>CAN/CSA C22.2 No. 60950-1-07, Information Technology Equipment - Safety - Part 1: General Requirements</p>

