

Programmable Logic Relays

8A
SERIES



Panels for
electrical
distribution



Packaging
machines



Control and
management
of water



Control
panels for
pumps



Air
Conditioner



Building
automation



Forced-air
ventilators



Programmable Logic Relays (PLRs) with 8 input and 4 output relays

Type 8A.04-8300

- Lite version with USB (type C port), ETH

Type 8A.04-8310

- Plus version with USB (type C port), ETH and Modbus RS485

Type 8A.04-8320

Type 8A.04-832C

- Advanced version with USB (type C port), ETH, Modbus RS485, Wi-Fi and BLE

- 8 digital or analog (0...10 V) input
- 4 relay output 10 A
- USB (type C port) port for programming, data logging and powering during configuration
- RJ45 port
- Connectivity (*according to type):
 - USB
 - 1 Gbit Ethernet TCP/IP or Modbus TCP/IP
 - Modbus RS485*
 - Wi-Fi + BLE*
- LED status indicator for each output
- Programmable USER button
- Programming language via IDE as an option IEC-61131-3 (LD - SFC - FBD - ST - IL)
- Programmable via Codesys (only 8A.04-832C)
- 70 mm wide
- 35 mm rail (EN 60715) mount

8A.04

Box clamp



For outline drawing see page 12

Output specification

Contact configuration

4 NO (SPST)

Rated current/Maximum peak current A

10/15

Rated voltage/
Maximum switching voltage V AC

250/400

Rated load AC1 VA

2500

Rated load AC15 (230 V AC) VA

500

Breaking capacity DC1: 24/110/220 V A

10/0.3/0.12

Minimum switching load mW(V/mA)

300 (5/5)

Output operate/release time ms

6/4

Standard contact material

AgNi

Input circuit

Number of inputs

8

Type

Digital/Analog (configurable)

Analog input type V

0...10

Analog input resolution

16 to 12 bit user configurable

Input frequency kHz

4.5

Input voltage signal 0/signal 1

< 4 V DC / > 5.9 V DC (Max. 24 V DC)

Maximum input voltage V DC

24

Input compatibility

PNP/NPN

Reverse polarity protection

YES

Supply specification

Nominal voltage (U_N) V DC

12...24

Rated power W

0.6...2.2 (according to type)

Operating range V DC

10.2...27.6

Technical data

Programming language

Arduino IDE, via Arduino PLC-IDE, Codesys (8A.04-832C)

Minimum input signal ms

0.02

Electrical life at rated load in AC1 cycles

100 · 10³

Ambient temperature range °C

-20...+50

Protection category

IP 20

Approvals (according to type)



8A.04-8300



- Lite version
- USB Port
- RJ45 Port for ETH and Modbus TCP/IP

8A.04-8310



- Plus version
- USB Port
- RJ45 Port for ETH and Modbus TCP/IP
- Modbus RS485 Port

8A.04-832x



- Advanced version
- USB Port
- RJ45 Port for ETH and Modbus TCP/IP
- Modbus RS485 Port
- Wi-Fi/BLE internal module
- Codesys version available

OPTA

Partnership with



OPTA

Partnership with



Expansion modules

Type 8A.58-1600

Type 8A.58-160C

- 16 digital or analog (0...10 V) inputs
- 8 EMR 6 A outputs

Type 8A.88-1600

Type 8A.88-160C

- 16 digital or analog (0...10 V) inputs
- 8 SSR 3 A outputs
- LED power status indicator
- 8 output status LEDs
- Auxiliary port
- Up to 5 expansion modules connectable
- Programming language via Arduino IDE or via Arduino PLC-IDE for IEC 61131-3 languages (LD - SFC - FBD - ST - IL)
- Programmable via Codesys (only 8A.x8-160C)
- 70 mm wide
- 35 mm rail (EN 60715) mount

8A.58/8A.88
Box clamp



For outline drawing see page 12

Output specification

Contact configuration		8 NO (SPST)	8 NO (SPST)
Rated current/Maximum peak current	A	6/10	3/50
Rated voltage/ Maximum switching voltage	V	250/400 V AC	24/33 V DC
Switching voltage range	V DC	—	1.5...30
Rated load AC1	VA	1500	—
Rated load AC15 (230 V AC)	VA	300	—
Rated load DC13	W	—	36
Minimum switching current	mA	—	1
Breaking capacity DC1: 24/110/220 V	A	6/0.2/0.12	—
Minimum switching load	mW (V/mA)	500 (12/10)	—
Max "OFF-state" leakage current	mA	—	0.001
Max "ON-state" voltage drop	V	—	0.4
Output operate/release time	ms	6/4	0.02/0.2
Standard contact material		AgNi	—

Input circuit

Number of inputs		16
Type		Digital/analogue
Analog input type	V	0...10
Analog input resolution		configurable 12 bit Max. - 8 bit Min.
Input frequency	kHz	4.5
Input voltage	signal 0/signal 1	< 4 V / > 5.9 V DC (Max. 24 V DC)
Maximum input voltage	V DC	24
Input compatibility		PNP/NPN
Reverse polarity protection		YES

Supply specification

Nominal voltage (U _N)	V DC	12...24
Rated power	W	1
Operating range	V DC	10.6...27.5

Technical data

Programming language		Via OPTA main module through Arduino IDE or Arduino PLC-IDE, Codesys (8A.x8-160C)
Minimum input signal	ms	0.02
Electrical life at rated load in AC1	cycles	60 · 10 ³ > 10 ⁶
Ambient temperature range	°C	-20...+50
Protection category		IP 20

Approvals (according to type)



8A.58-160x



- 16 digital/analog (0...10 V) inputs
- 8 EMR 6 A outputs
- Nominal voltage 12...24 V DC
- Codesys version available



OEM PROJECTS



BUILDING AUTOMATION



INDUSTRIAL APPLICATIONS

OPTA

Partnership with



8A.88-160x



- 16 digital/analog (0...10 V) inputs
- 8 SSR 3 A outputs
- Nominal voltage 12...24 V DC
- Codesys version available

Expansion modules

Type 8A.26-0600

Type 8A.26-060C

- 6 analog inputs 0...10 V, 4...20 mA, PT 100 (2-3 wires)
- 2 analog outputs 0...10 V, 4...20 mA
- 4 PWM outputs
- Nominal voltage 12...24 V DC
- LED power status indicator
- 8 programmable LEDs
- Auxiliary port
- Up to 5 expansion modules connectable
- Programming language via Arduino IDE or via Arduino PLC-IDE for IEC 61131-3 languages (LD - SFC - FBD - ST - IL)
- Programmable via Codesys (only 8A.26-060C)
- 70 mm wide
- 35 mm rail (EN 60715) mount

For outline drawing see page 12

Analog outputs specification

Number of analog outputs

8A.26-060x



- 6 analog inputs 0...10 V, 4...20 mA, PT100 (2-3 wires)
- 2 analog outputs 0...10 V, 4...20 mA
- 4 PWM outputs
- Nominal voltage 12...24 V DC
- Codesys version available

Type of analog outputs

Analog voltage 0...10 V and current 4...20 mA

Analog outputs resolution

bit

13

Voltage output mode

Analog output voltage

V DC

0...10

Short-circuit current per channel (sourcing)

mA

Min. 25 - Max. 32

Short-circuit current per channel (sinking)

mA

Min. 3.0 - Max. 4.5

Accuracy

+/- 1 %

Repeatability

+/- 1 %

Current output mode

Analog output current

mA

0/4...20

Maximum output voltage @ 20 mA

V

11.9 ± 20%

Open circuit voltage

V

16.9 ± 20%

Output impedance

MΩ

Min. 1.5 - Max. 4

Accuracy

1% in 0...10 mA range, 2% in 10...20 mA range

Repeatability

1% in 0...10 mA range, 2% in 10...20 mA range

PWM output channels

Number of PWM outputs

4

Source voltage supported

V DC

8...28.8

PWM frequency

kHz

10

Max current

mA

100

Period

Programmable

Duty-cycle

Programmable (0-100%)

Input analog specification

Number of analog inputs

6 (programmable up to 8)

Type of analog inputs

Analog voltage 0...10 V, current 4...20 mA, PT100

Inputs overvoltage protection

Yes (Up to 40 V)

Antipolarity protection

No

Analog Input resolution

bit

16

Voltage Input Mode

Analog input voltage

V

0...10

Input impedance

MΩ

Min. 175

Accuracy

+/- 1 %

Repeatability

+/- 1 %

Current Input Mode

Analog input current

mA

0/4...20

Short circuit current limit

mA

Min. 25 - Max 35

Programmable current limit

mA

0.5...24.5

Accuracy

+/- 1 %

Repeatability

+/- 1 %

RTD Input Mode

RTD input type

PT 100

Wiring type (Input)

2 wires (I1...I6, O1, O2)

3 wires (I1, I2)

Input range

MΩ

0...1

Bias voltage

V

2.5

Temperature range

°C

-25...+400

Accuracy

+/- 1.5 °C (in the ambient T range -20°C...50°C)

Supply specification

Nominal voltage (U_N)

V DC

12...24

Rated power

W

1

Operating range

V

9.6...28.8

Technical data

Programming language

Via OPTA main module through Arduino IDE or Arduino PLC-IDE, Codesys (8A.26-060C)

LED signaling

1 power LED + 8 user programmable LEDs

Ambient temperature range

°C

-20...+50

Protection category


IP 20

Approvals (according to type)




Ordering information

Example: 8A Series, Lite PLR version, 4 NO (SPST) - 10 A, 8 digital/analog inputs, 12...24 V DC.

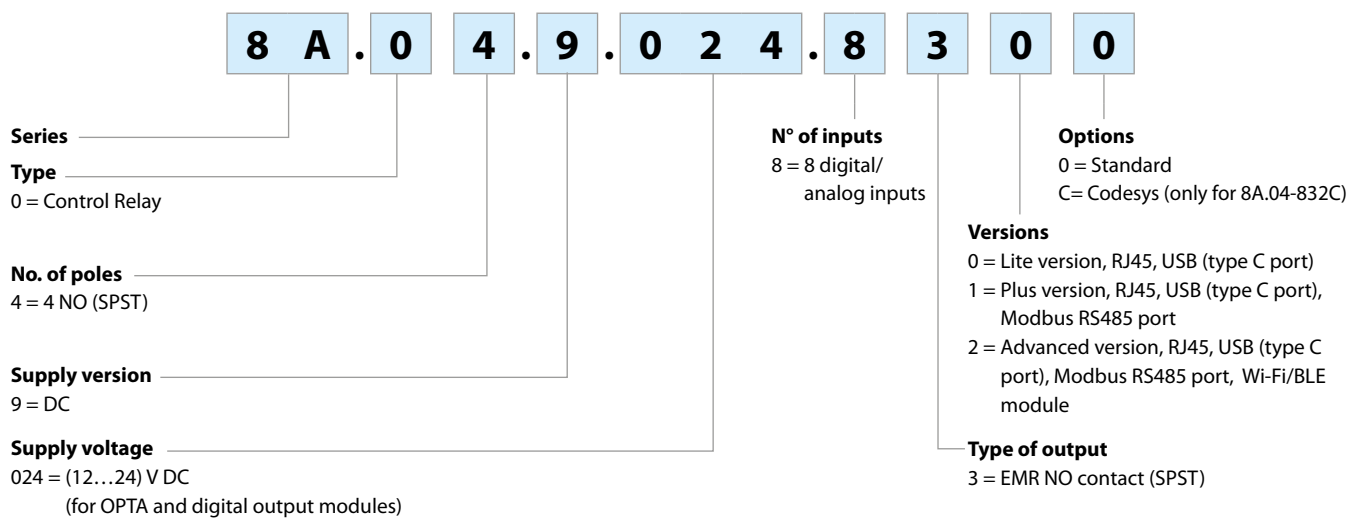


Example: 8A Series, digital EMR expansion, 8 EMR outputs - 6 A, 16 digital/analog inputs, supply 12...24 V DC.

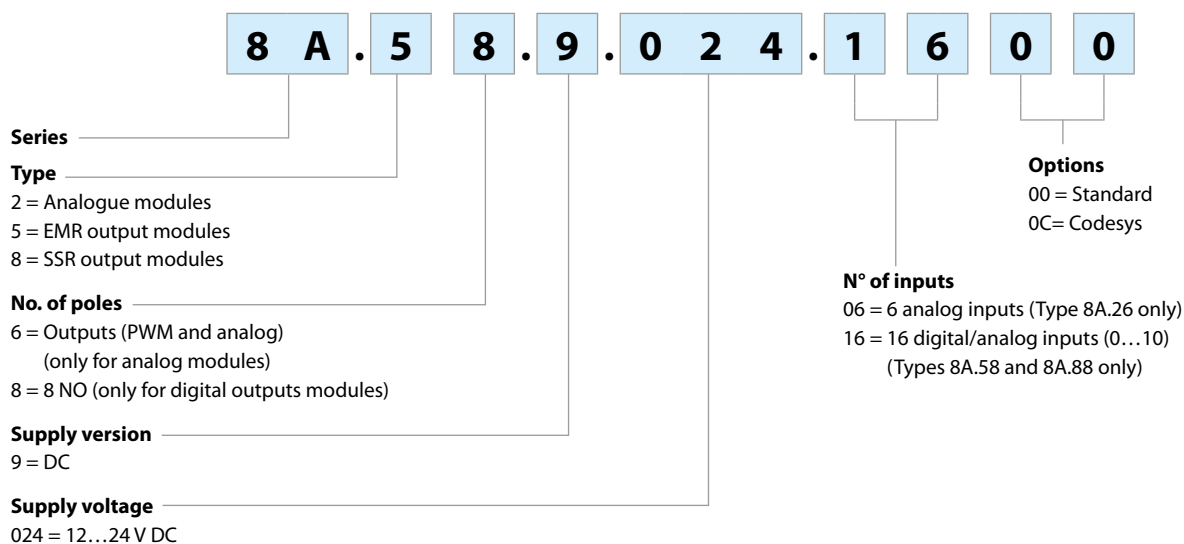

Technical data


Insulation			
	between input and output circuit	V AC	4000
	between open contacts	V AC	1000
Insulation (1.2/50 µs) between input and output		kV	6
EMC specifications			
Type of test		Reference standard	
Electrostatic discharge	contact discharge	EN 61000-4-2	4 kV
	air discharge	EN 61000-4-2	8 kV
Radio-frequency electromagnetic field (80 ÷ 1000 MHz)		EN 61000-4-3	10 V/m
Fast transients (burst) (5-50 ns, 5 kHz) on Supply terminals		EN 61000-4-4	4 kV
Surges (1.2/50 µs) on Supply terminals	common mode	EN 61000-4-5	4 kV
	differential mode	EN 61000-4-5	4 kV
	on input terminals common mode	EN 61000-4-5	4 kV
	differential mode	EN 61000-4-5	4 kV
Radio-frequency common mode (0.15 ÷ 80 MHz) on Supply terminals		EN 61000-4-6	10 V
Radiated and conducted emission		EN 55022	class B
Other data			
Power lost to the environment	without contact current	W	1.4
	with rated current	W	3.2
PLC to PLC communication and PLC to network communication (Ethernet)		Ethernet: – For Modbus TCP communication – As standard TCP/IP – RJ45 connector CAT5 cable, 2X LAN status led indicators RS485: – For Modbus RTU communication – For custom serial communication	
Wireless connectivity		Wi-Fi and Bluetooth® Low Energy	
Maximum program memory		1 MB internal	
External memory module		USB-C pendrive	
Data Logging		USB-C Stick + internal flash memory	
Flash memory		2MB int + 16MB Flash QSPI	
RESET button		YES	
USER button		Push-button configurable for user purposes	
MCU		STMicroelectronics STM32H747XI Dual ARM® Cortex® M7/M4 IC: 1x ARM® Cortex® -M7 core up to 480 MHz 1x ARM® Cortex® -M4 core up to 240 MHz	
Secure element		ATECC608B	
Programming interface		USB-C + OTA via Web Editor (Cloud) + Ethernet	
RTC power reserve		10 days at 25 °C	
RTC accuracy		10 min/year @25 °C 37.5 min/year @ -10...+70 °C	
Cloud support		Arduino Cloud via Wi-Fi and Ethernet or the Cloud services	
Response time ON/OFF (8A.04/8A.58)		ms	6/4 (EMR)
Response time ON/OFF (8A.88)		ms	0.02/0.2 (SSR)
Bounce time NO		ms	3
Terminals		Box clamp	
Wire strip length		mm	9
 Screw torque		Nm	0.5
Min. wire size		solid cable	stranded cable
	mm²	0.5	0.5
	AWG	20	20
Max. wire size		solid cable	stranded cable
	mm²	1 x 2.5 / 2 x 1.5	1 x 2.5 / 2 x 1
	AWG	1 x 14 / 2 x 16	1 x 14 / 2 x 16

Front view - Type 8A.04.9.024.83xx

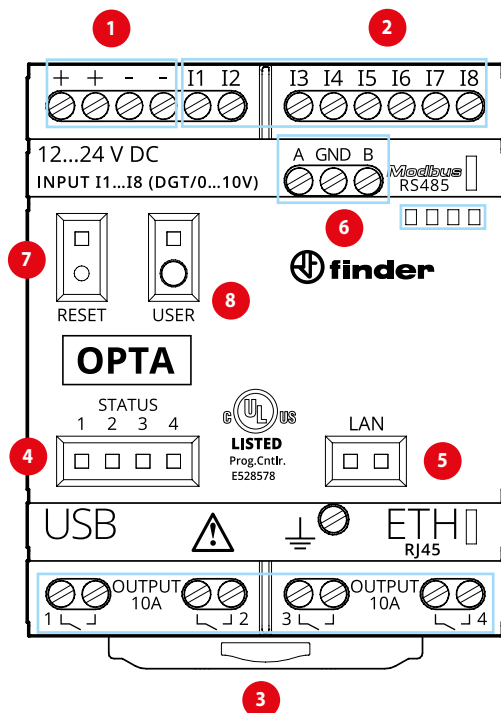


- 1 Supply terminals**
12...24 V DC, Split terminals to facilitate wiring.
- 2 Input terminals**
1...18 digital/analog (0...10 V) input configurable via IDE.
- 3 Output terminals**
1...4 Output relay, 10 A - 250 V AC, NO contact.
- 4 LED Status**
1...4 LED Status configurable via IDE.
For example for 1...4 output relay LED ON = Contact CLOSE.
- 5 LED Ethernet port status**
Status of ETH connection.
- 6 Modbus RS485 Port**
Terminals for Modbus over RS485 protocol.
- 7 HARDWARE RESET**
Button for hardware reset. BE CAREFUL. Press the 'RESET' button with the tip of a small non-metallic insulated tool.
- 8 Programmable USER button**
Button configurable via IDE by user, according to application (ex. RUN/STOP, ON/OFF, BLE pair).

Front view - Digital EMR - Type 8A.58.9.024.160x

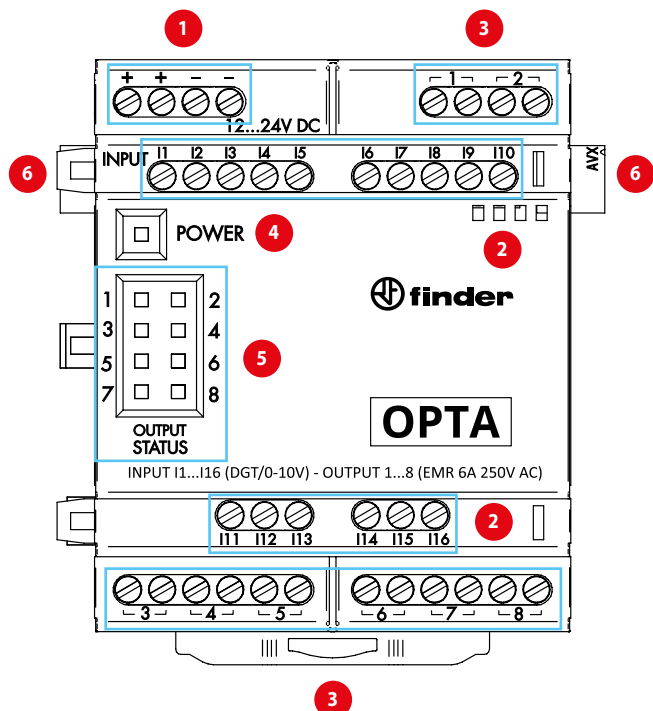


- 1 Supply terminals**
12...24 V DC, Bifurcated terminals
- 2 Input terminals**
1...16 digital/analog (0...10 V) input configurable via IDE.
- 3 EMR Output terminals**
1...8 EMR output, 6 A - 250 V AC
- 4 LED Status**
LED RGB
- 5 Output status LED**
Yellow LED output status
- 6 AUXILIARY PORT**

Front view - Digital SSR - Type 8A.88.9.024.160x

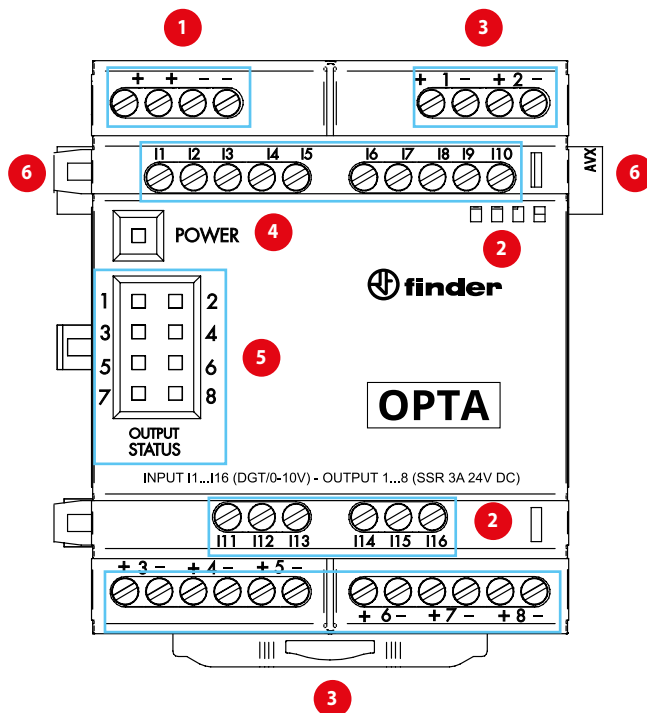

- 1 **Supply terminals**
12...24 V DC, Bifourcated terminals
- 2 **Input terminals**
I1...I16 digital/analog (0...10 V) input configurable via IDE.
- 3 **SSR Output terminals**
1...8 SSR output, 3 A - 24 V DC
- 4 **LED Status**
LED RGB
- 5 **Output status LED**
Yellow LED output status
- 6 **AUXILIARY PORT**


Front view - Analogue - Type 8A.26.9.024.160x

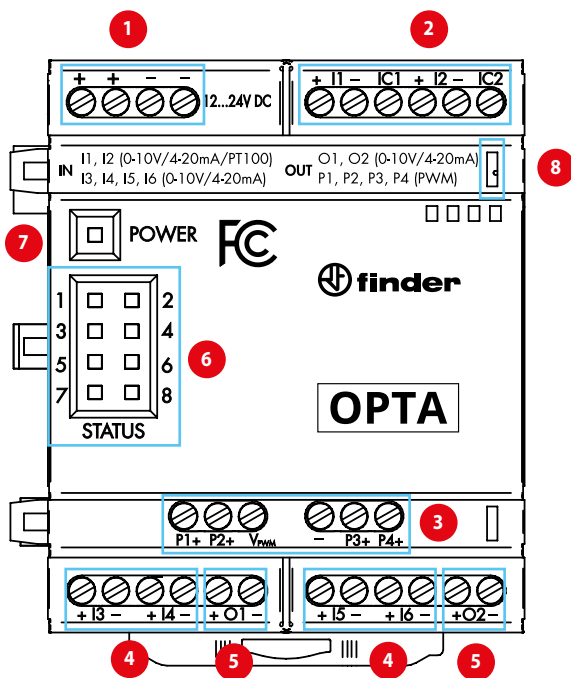


- 1 **Supply terminals**
12...24 V DC, Bifourcated terminals
- 2 **Input terminals**
I1,I2 Analog input 0...10 V, 0/4...20 mA, PT100 (2 or 3 wires)
- 3 **PWM Output terminals**
P1...P4 PWM positive output terminals, V_{_pwm} voltage PWM terminal, - negative PWM terminal
- 4 **Input terminals**
I3...I6 Analog input 0...10 V, 0/4...20 mA, PT100 (2 wires)
- 5 **Output terminals**
O1, O2 Analog output 0...10 V, 0/4...20 mA
- 6 **Output status LED**
Yellow programmable status LED
- 7 **Power LED status**
LED RGB
- 8 **AUXILIARY PORT**

Wiring diagrams


Type 8A.04-8300

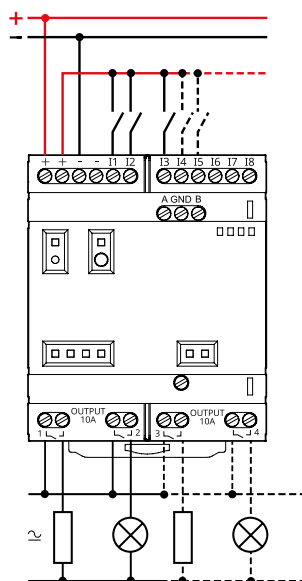


Type 8A.04-8310/832x

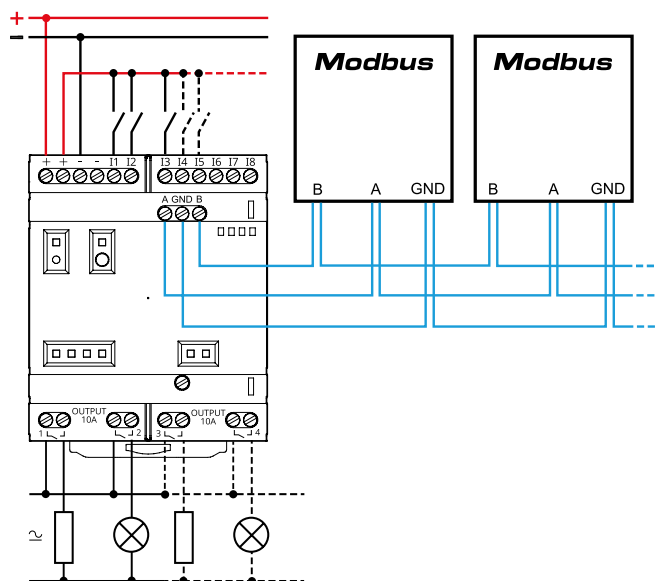


Type 8A.58-160x

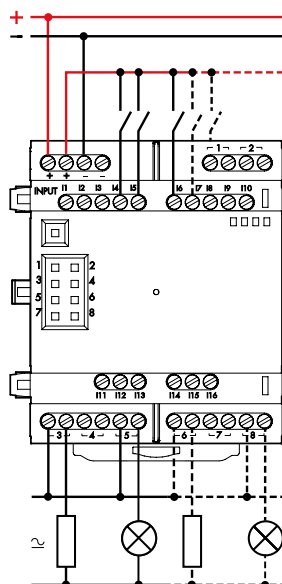

Type 8A.88-160x

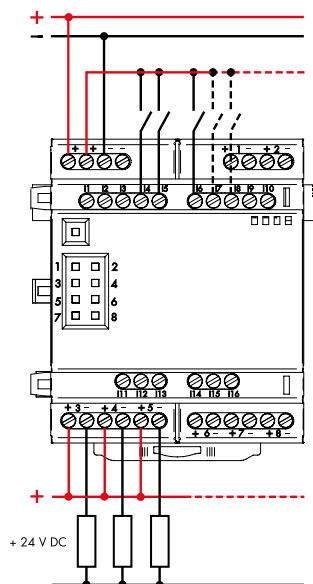


Type 8A.26-060x

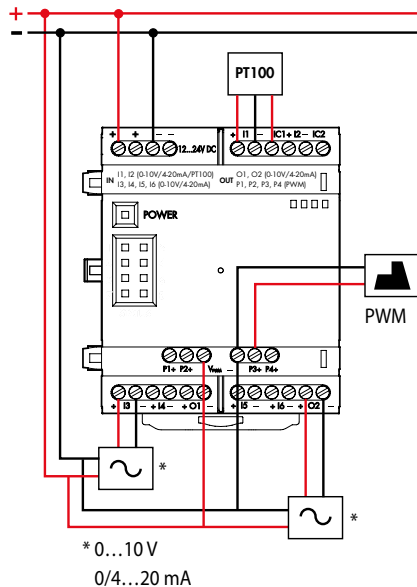


Contact specification

F 8A - Electrical life (AC) v contact current

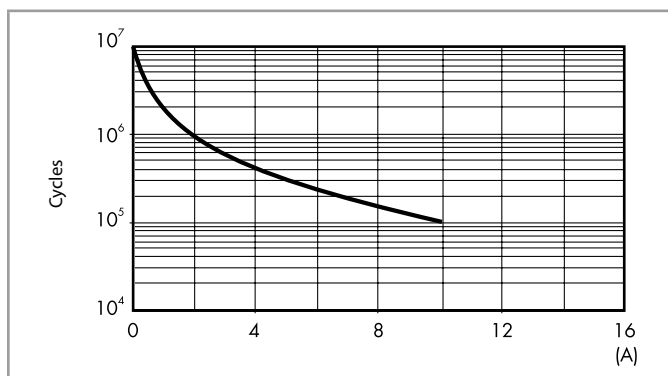

H 8A - Maximum DC1 breaking capacity

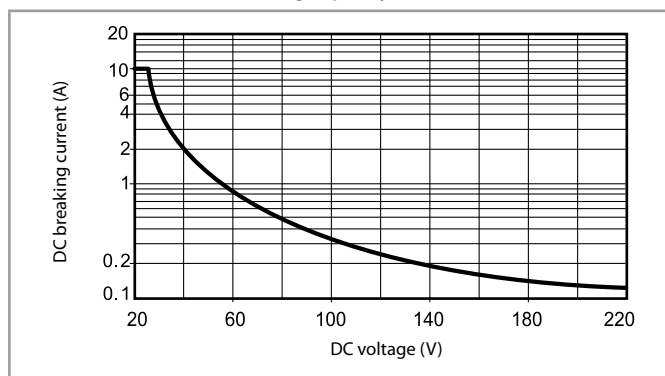

- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of $\geq 100 \cdot 10^3$ can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load.
Note: the release time for the load will be increased.

Getting "Started Guide"

GETTING STARTED GUIDE: opta.findernet.com

If you want to program your OPTA while offline you need to install the Arduino Desktop IDE, Arduino Cloud or Arduino PLC-IDE, Codesys.
To connect the OPTA to your computer, you'll need a USB cable.

opta.findernet.com

GETTING STARTED - ARDUINO CLOUD

All Arduino IoT enabled products are supported on Arduino Cloud which allows you to Log, graph and analyze sensor data, trigger events, and automate your home or business.


The Arduino Cloud is hosted online, therefore it will always be up-to-date with the latest features and support for all boards.

Follow to start coding on the browser and upload your sketches onto your board.


<https://cloud.arduino.cc>

Outline drawings


Type 8A.04-8300
Box clamp

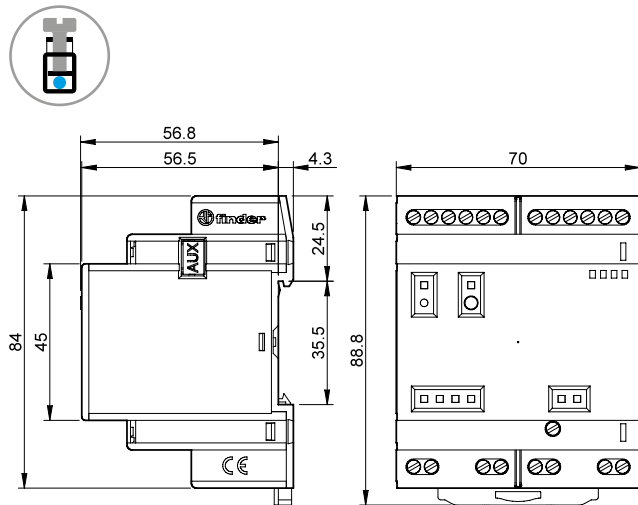


Type 8A.04-8310/832x
Box clamp

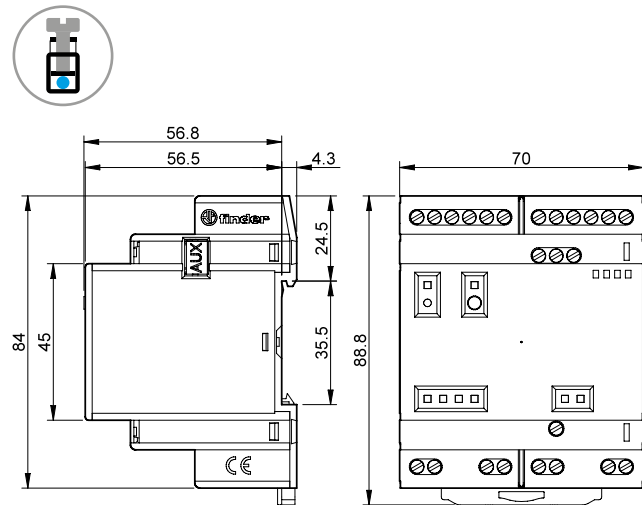

Type 8A.58-160x
Box clamp

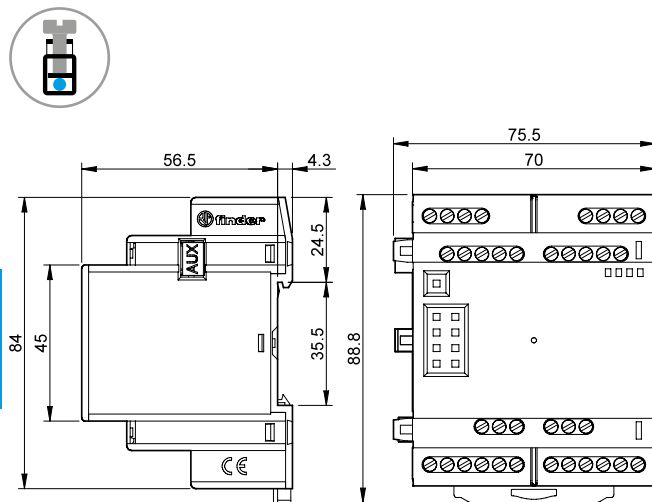

Type 8A.88-160x
Box clamp

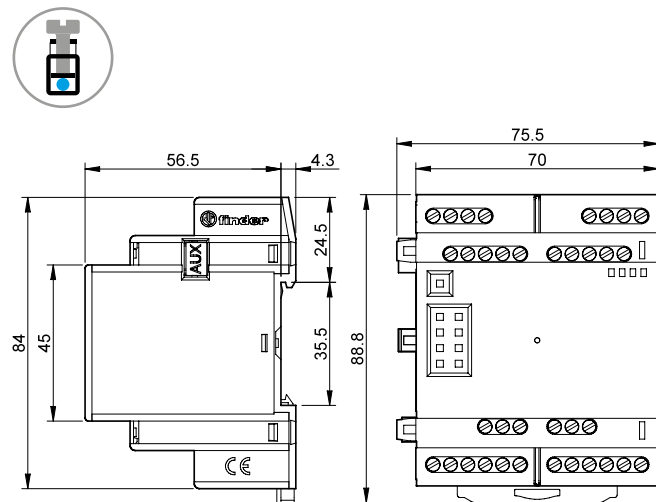

Type 8A.26-060x
Box clamp

