


# Product Environmental Profile

## Lexium Servo Motor



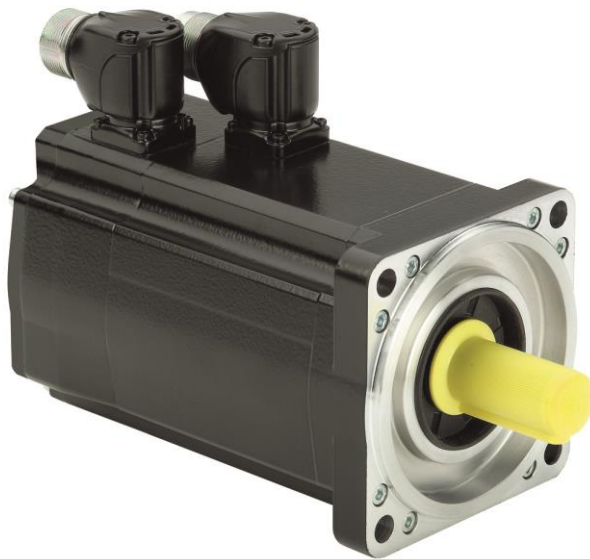


## General information

|                                   |   |
|-----------------------------------|---|
| <b>Representative product</b>     | Lexium Servo Motor - SH31002P12F2200  |
| <b>Description of the product</b> | The servo motors meet rigorous requirements of dynamics and precision. Five flange sizes with different torque outputs offer the correct drive solution for your application.   |
| <b>Description of the range</b>   | The main purpose of the Lexium Servo Motor (BSH; SH3; MH190 to BMH205; MH3190) range is to provide our customer a servo motor product range in combination with the servo drive offer Lexium05 and Lexium 32 ; 52 and 62.<br><br>The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with a similar technology. |
| <b>Functional unit</b>            | Coordinate and synchronize motion control up to 207W during 10 years and a 70% use rate.  |



## Constituent materials

|                               |   |
|-------------------------------|---|
| <b>Reference product mass</b> | 8140 g including the product, its packaging and additional elements and accessories |
|-------------------------------|---|

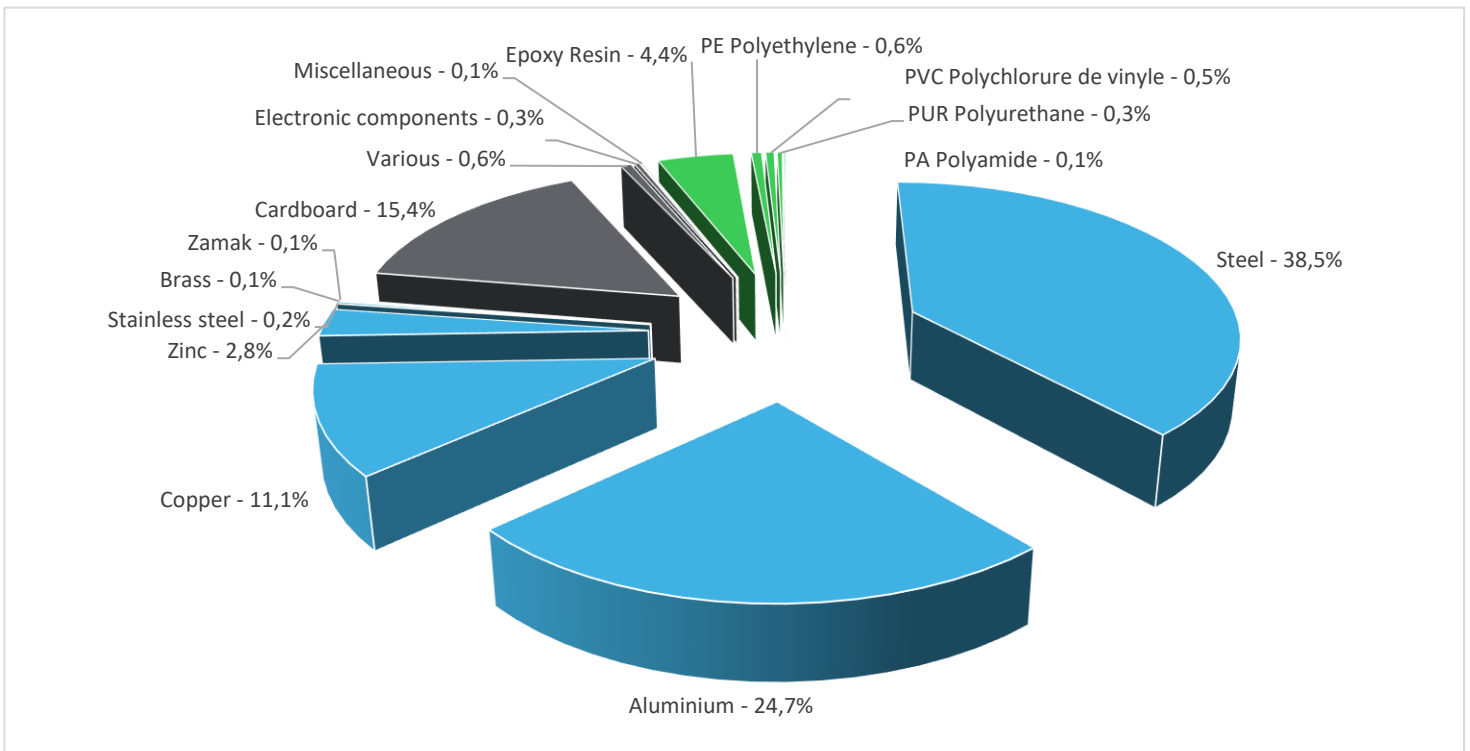

|          |       |
|----------|-------|
| Plastics | 5,9%  |
| Metals   | 77,5% |
| Others   | 16,4% |



## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate– BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>

## Additional environmental information


The Lexium Servo Motor presents the following relevant environmental aspects

|                      |   |
|----------------------|---|
| <b>Manufacturing</b> | Manufactured at a Schneider Electric production site ISO14001 certified   |
| <b>Distribution</b>  | Weight and volume of the packaging optimized, based on the European Union's packaging directive<br>Packaging weight is 1313,2 g, consisting of cardboard (95,7%), PE film (3,9%) and paper (0,4%)<br>Product distribution optimised by setting up local distribution centres  |
| <b>Installation</b>  | SH31002P12F2200 does not require any installation operations.   |
| <b>Use</b>           | The product does not require special maintenance operations.  |
| <b>End of life</b>   | End of life optimized to decrease the amount of waste and allow recovery of the product components and materials<br><br>No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.<br><br>Recyclability potential: <b>84%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME). |

## Environmental impacts

|   |   |  |  |  |
|---|---|--|--|--|
| <b>Reference life time</b>              | 10 years  |  |  |  |
| <b>Installation elements</b>            | No special components needed  |  |  |  |
| <b>Use scenario</b>                     | The use scenario is: 207 W for 50% service uptime and 2 W in standby mode, 20% service uptime.  |  |  |  |
| <b>Geographical representativeness</b>  | Europe  |  |  |  |
| <b>Technological representativeness</b> | The servo motors meet rigorous requirements of dynamics and precision. Five flange sizes with different torque outputs offer the correct drive solution for your application. |  |  |  |
| <b>Energy model used</b>                | <b>Manufacturing</b>  | <b>Installation</b>  | <b>Use</b>   | <b>End of life</b>   |
|   | Energy model used: Germany  | Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27 | Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27 | Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27 |

| Compulsory indicators                            |                                     | Lexium Servo Motor - SH31002P12F2200 |               |              |              |          |             |
|--|-------------------------------------|--------------------------------------|---------------|--------------|--------------|----------|-------------|
| Impact indicators                                | Unit                                | Total                                | Manufacturing | Distribution | Installation | Use      | End of Life |
| Contribution to mineral resources depletion      | kg Sb eq                            | 3,04E-03                             | 2,66E-03      | 0*           | 0*           | 3,87E-04 | 0*          |
| Contribution to the soil and water acidification | kg SO <sub>2</sub> eq               | 1,87E+01                             | 1,19E-01      | 4,80E-03     | 0*           | 1,86E+01 | 1,99E-03    |
| Contribution to water eutrophication             | kg PO <sub>4</sub> <sup>3-</sup> eq | 1,14E+00                             | 1,35E-02      | 1,10E-03     | 0*           | 1,12E+00 | 4,94E-04    |
| Contribution to global warming                   | kg CO <sub>2</sub> eq               | 4,50E+03                             | 3,56E+01      | 1,05E+00     | 0*           | 4,46E+03 | 7,67E-01    |
| Contribution to ozone layer depletion            | kg CFC11 eq                         | 3,47E-04                             | 5,68E-05      | 0*           | 0*           | 2,91E-04 | 4,21E-08    |
| Contribution to photochemical oxidation          | kg C <sub>2</sub> H <sub>4</sub> eq | 1,03E+00                             | 1,03E-02      | 3,42E-04     | 0*           | 1,02E+00 | 2,13E-04    |
| Resources use                                    | Unit                                | Total                                | Manufacturing | Distribution | Installation | Use      | End of Life |
| Net use of freshwater                            | m <sup>3</sup>                      | 1,62E+04                             | 0*            | 0*           | 0*           | 1,62E+04 | 0*          |
| Total Primary Energy                             | MJ                                  | 8,98E+04                             | 7,20E+02      | 1,49E+01     | 0*           | 8,91E+04 | 9,94E+00    |

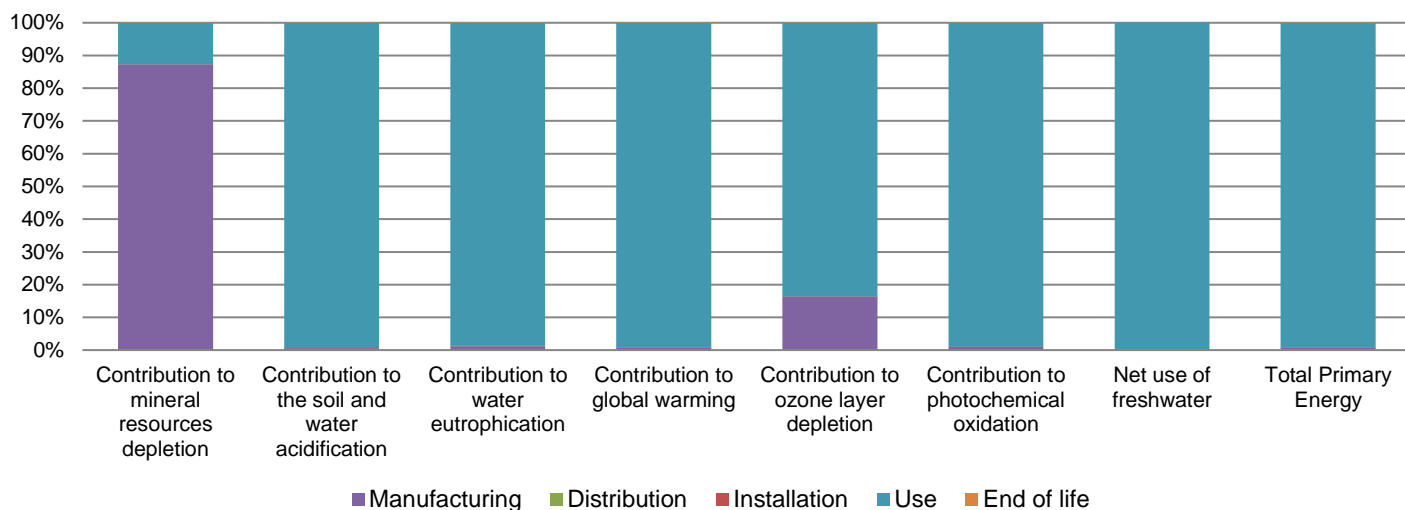

| Optional indicators   |                | Lexium Servo Motor - SH31002P12F2200 |               |              |              |          |             |
|---|----------------|--------------------------------------|---------------|--------------|--------------|----------|-------------|
| Impact indicators   | Unit           | Total                                | Manufacturing | Distribution | Installation | Use      | End of Life |
| Contribution to fossil resources depletion  | MJ             | 5,10E+04                             | 3,15E+02      | 1,48E+01     | 0*           | 5,06E+04 | 7,98E+00    |
| Contribution to air pollution   | m <sup>3</sup> | 2,02E+05                             | 1,02E+04      | 4,47E+01     | 0*           | 1,92E+05 | 7,06E+01    |
| Contribution to water pollution   | m <sup>3</sup> | 1,87E+05                             | 2,66E+03      | 1,73E+02     | 0*           | 1,84E+05 | 7,83E+01    |
| Resources use   | Unit           | Total                                | Manufacturing | Distribution | Installation | Use      | End of Life |
| Use of secondary material   | kg             | 2,52E+00                             | 2,52E+00      | 0*           | 0*           | 0*       | 0*          |
| Total use of renewable primary energy resources   | MJ             | 1,14E+04                             | 4,20E+01      | 0*           | 0*           | 1,13E+04 | 0*          |
| Total use of non-renewable primary energy resources   | MJ             | 7,84E+04                             | 6,78E+02      | 1,48E+01     | 0*           | 7,77E+04 | 9,93E+00    |
| Use of renewable primary energy excluding renewable primary energy used as raw material         | MJ             | 1,13E+04                             | 1,70E+01      | 0*           | 0*           | 1,13E+04 | 0*          |
| Use of renewable primary energy resources used as raw material                                  | MJ             | 2,50E+01                             | 2,50E+01      | 0*           | 0*           | 0*       | 0*          |
| Use of non renewable primary energy excluding non renewable primary energy used as raw material | MJ             | 7,84E+04                             | 6,70E+02      | 1,48E+01     | 0*           | 7,77E+04 | 9,93E+00    |
| Use of non renewable primary energy resources used as raw material                              | MJ             | 7,82E+00                             | 7,82E+00      | 0*           | 0*           | 0*       | 0*          |
| Use of non renewable secondary fuels  | MJ             | 0,00E+00                             | 0*            | 0*           | 0*           | 0*       | 0*          |
| Use of renewable secondary fuels  | MJ             | 0,00E+00                             | 0*            | 0*           | 0*           | 0*       | 0*          |
| Waste categories  | Unit           | Total                                | Manufacturing | Distribution | Installation | Use      | End of Life |
| Hazardous waste disposed  | kg             | 1,36E+02                             | 1,26E+02      | 0*           | 0*           | 2,32E+00 | 7,96E+00    |
| Non hazardous waste disposed  | kg             | 1,67E+04                             | 3,35E+01      | 0*           | 0*           | 1,66E+04 | 0*          |
| Radioactive waste disposed  | kg             | 1,11E+01                             | 2,36E-02      | 0*           | 0*           | 1,11E+01 | 0*          |
| Other environmental information   | Unit           | Total                                | Manufacturing | Distribution | Installation | Use      | End of Life |
| Materials for recycling   | kg             | 7,78E+00                             | 7,69E-01      | 0*           | 1,27E+00     | 0*       | 5,75E+00    |
| Components for reuse  | kg             | 0,00E+00                             | 0*            | 0*           | 0*           | 0*       | 0*          |
| Materials for energy recovery   | kg             | 4,25E-02                             | 0*            | 0*           | 0*           | 0*       | 4,25E-02    |
| Exported Energy   | MJ             | 3,99E-03                             | 3,75E-04      | 0*           | 3,62E-03     | 0*       | 0*          |

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range.

Depending on the impact analysis, the environmental indicators (without "contribution to Mineral Resources Depletion" and "contribution to ozone layer depletion") of other products in this family may be proportional extrapolated by energy consumption values. For mineral Resources Depletion, 88% is caused by manufacturing and 12% is caused by the use phase therefore 88% of the impact may be proportional extrapolated by mass of the product and 12% may be proportional extrapolated by energy consumption values. For ozone layer depletion, 16% is caused by manufacturing and 84% is caused by the use phase therefore 16% of the impact may be proportional extrapolated by mass of the product and 84% may be proportional extrapolated by energy consumption values.

*Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.*

|  |                   |  |  |
|--|-------------------|--|--|
| <i>Registration number</i>   | ENVPEP111049EN_V2 | <i>Drafting rules</i>                      | PCR-ed3-EN-2015 04 02  |
| <i>Date of issue</i>   | 08/2020           |  |  |
| <i>Validity period</i>   | 5 years           | <i>Information and reference documents</i> | <a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a> |
| <i>Independent verification of the declaration and data</i>  |                   |  |  |
| Internal   | X                 | External                                   |  |
| <i>The elements of the present PEP cannot be compared with elements from another program.</i>  |                   |  |  |
| <i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i> |                   |  |  |

Schneider Electric Industries SAS

Country Customer Care Center  
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier  
 CS 30323  
 F- 92506 Rueil Malmaison Cedex  
 RCS Nanterre 954 503 439  
 Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

ENVPEP111049EN\_V2

Published by Schneider Electric

© 2020 - Schneider Electric – All rights reserved

08/2020