

# MQ-8 HYDROGEN (H<sub>2</sub>) GAS SENSOR BOARD

## WITH ANALOG AND DIGITAL OUTPUT

JOY-IT

### SPECIAL FEATURES

- ✓ Optimized for detection of hydrogen (H<sub>2</sub>) and hydrogen-containing gases
- ✓ Measurement range of approximately 100 to 1,000 ppm
- ✓ Analog output (0–5 V) for continuous gas concentration monitoring
- ✓ Digital threshold output with adjustable trigger via on-board potentiometer
- ✓ Operates from a standard 5 V DC supply with integrated heater circuit
- ✓ Compact sensor board with LED status indication and flexible mounting options



The MQ-8 gas sensor board is a semiconductor-based sensing module designed for the detection of hydrogen (H<sub>2</sub>) and hydrogenous gases. The sensing element exhibits high sensitivity to hydrogen, making the module suitable for hydrogen leak detection, gas alarm systems, and safety-related monitoring applications. The typical detection range extends from 100 to 1,000 ppm.

The module operates from a 5 V DC supply and integrates the required heater circuitry for stable sensor operation. Gas concentration is evaluated via an analog voltage output in the range of 0 to 5 V, derived from the change in sensing resistance. In addition, a digital output is provided via an onboard comparator with an adjustable threshold, allowing direct use in alarm or switching applications without external signal conditioning.

After each power-up, the sensor requires a heat-up time of approximately 10 to 15 minutes before reliable measurements can be obtained. For initial commissioning, a burn-in period of 48 to 168 hours of continuous operation is recommended to stabilize the sensing element. Following this period, a baseline resistance measurement in clean air should be recorded as a reference value. If the sensor has been powered off for several weeks or longer, repeating the burn-in and baseline procedure is advised to maintain measurement consistency.


The board is equipped with power and status LEDs for visual indication of operation and detection status. For mechanical and layout flexibility, the LEDs may alternatively be soldered on the opposite side of the PCB. Electrical interfacing is provided via a 4-pin 2.54 mm header and a Molex PicoBlade connector, enabling straightforward integration into embedded systems, microcontroller platforms, and gas detection devices.


## MAIN FEATURES

|                       |                                                                                                                                                                                                                                                                                                                                           |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Measurable substances | Hydrogen (H <sub>2</sub> ), diverse hydrogenous gases                                                                                                                                                                                                                                                                                     |
| Measurement range     | 100 - 1000 ppm                                                                                                                                                                                                                                                                                                                            |
| Application areas     | Detecting gas leaks, gas alarm, robotic, microcontroller projects                                                                                                                                                                                                                                                                         |
| Supply voltage        | 5 V DC                                                                                                                                                                                                                                                                                                                                    |
| Output                | Analog sensor value output 0 V - 5 V,<br>digital threshold output 0 V / 5 V (threshold adjustable with on-board potentiometer)                                                                                                                                                                                                            |
| Heat up time          | At every start of the sensor it needs to heat up for 10 to 15 minutes before the sensor can deliver a reliable value.                                                                                                                                                                                                                     |
| Burn-in time          | When first used, the sensor requires a burn-in period of 48 to 168 hours of continuous operation to stabilize the sensing element; afterwards, a baseline reading should be taken in clean air to establish a reliable reference value. This procedure should be repeated if the sensor has been powered off for several weeks or longer. |
| LED indicator         | Power LED (green), status LED (red)<br>You can also solder the LEDs on the opposite side of the board to adapt it to the requirements of your project                                                                                                                                                                                     |
| Interfaces            | 4pin pin header (2.54 mm), molex picoblade (53261-0471)                                                                                                                                                                                                                                                                                   |


## FURTHER INFORMATION

|                        |                  |
|------------------------|------------------|
| Weight                 | 8 g              |
| Dimensions (l x w x h) | 41 x 25 x 21 mm  |
| Article number         | SEN-MQ8-V2       |
| Scope of delivery      | MQ8 sensor board |
| Customs tariff number  | 90269000         |
| EAN                    | 4250236830698    |

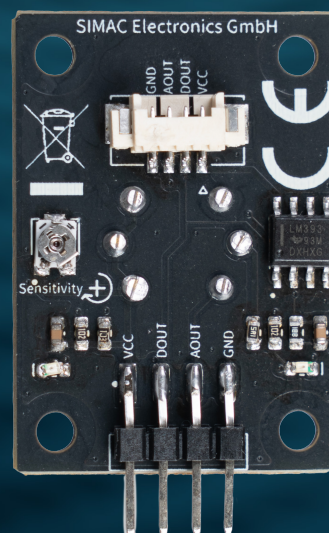

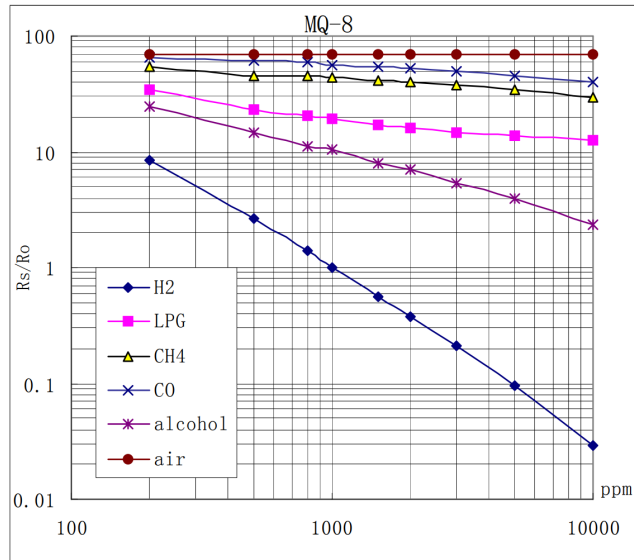

This shows the typical sensitivity characteristics of the MQ-8. Rs means resistance of the sensor in different gases, Ro means resistance of sensor in 1000ppm H2.

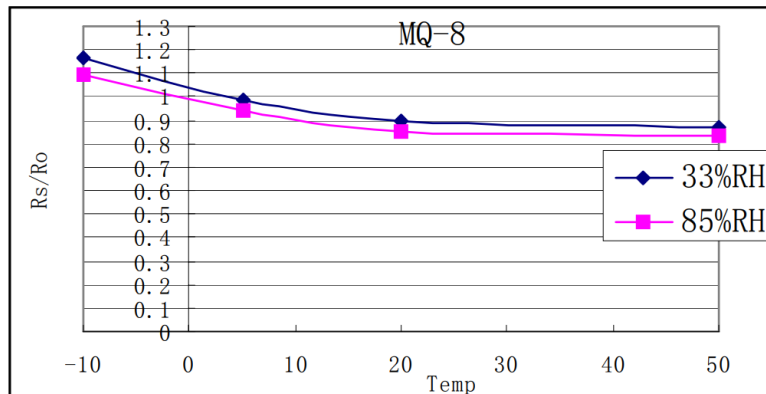

Correlation between sensor resistance(Rs) and ambient temperature and humidity  
The resistance of the sensor can be calculated with the following formula:

$$R_s = \left( \frac{V}{V_{RL}} - 1 \right) \times R_L$$

V= Supply voltage (5 V); V<sub>RL</sub>= Analog pin voltage; R<sub>L</sub>= Load resistance (1500 Ω)

