



## Quick Installation Guide SHS 200 Battery Box

www.victronenergy.com


### Included

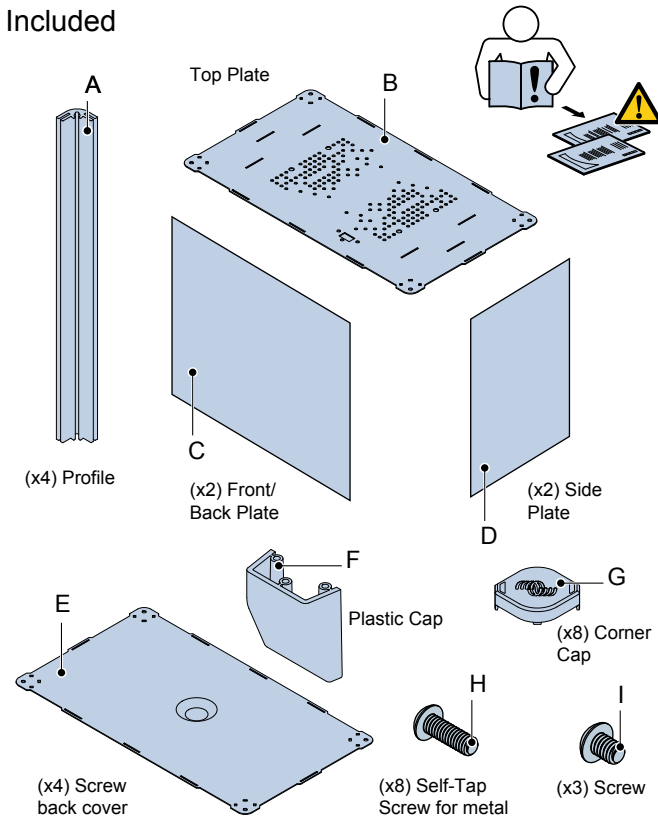


### Not Included

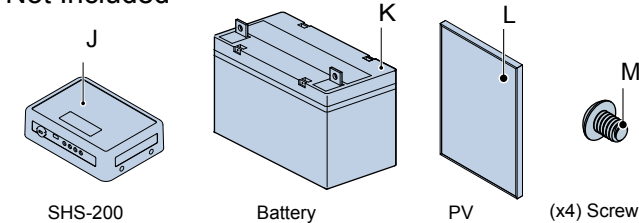


Fix the profiles to the bottom plate.  
Use supplied M4 screws.

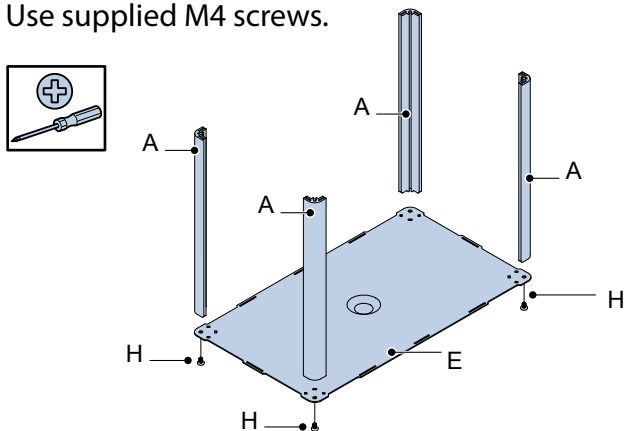


Slide the front and back plate through the profiles gap.

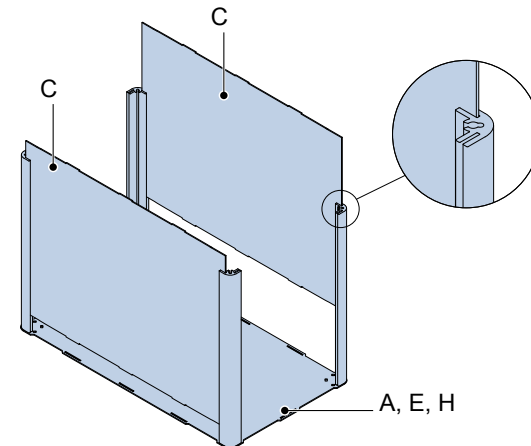


Snap-in four Corner-Caps on top of each screw head. The cap should click once it's properly attached.

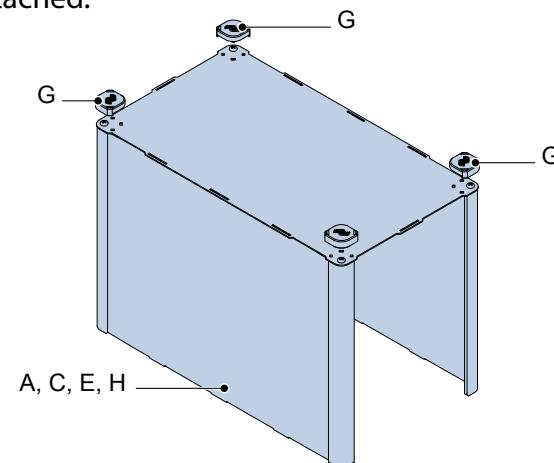

Carefully, lift the battery and slide it inside the enclosure from the top.

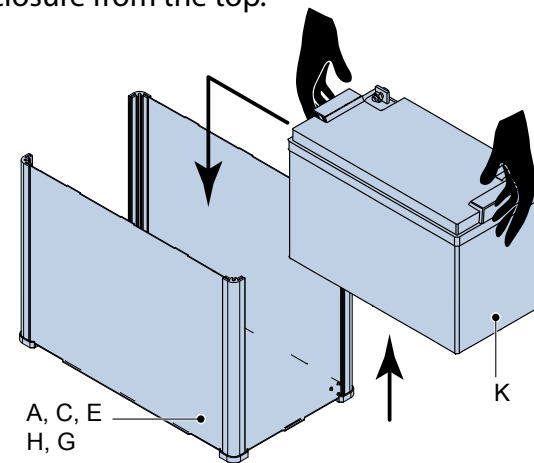


Slide in the lateral plates through the profile gaps.

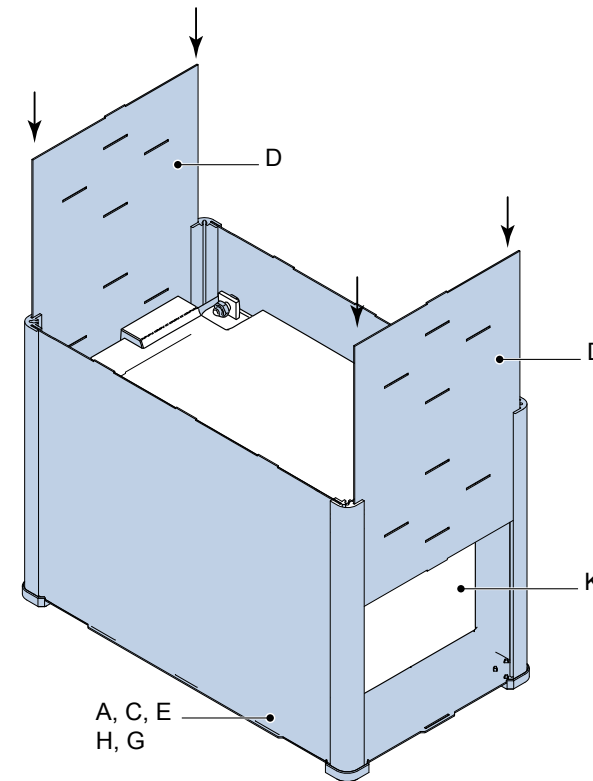

Fix the SHS-200 top-plate of the battery box. Use the 4 screws supplied together with the SHS wall-mountures.


Fix the plastic cap to the top plate. Make sure the battery cable is going through the opening as shown on the picture.

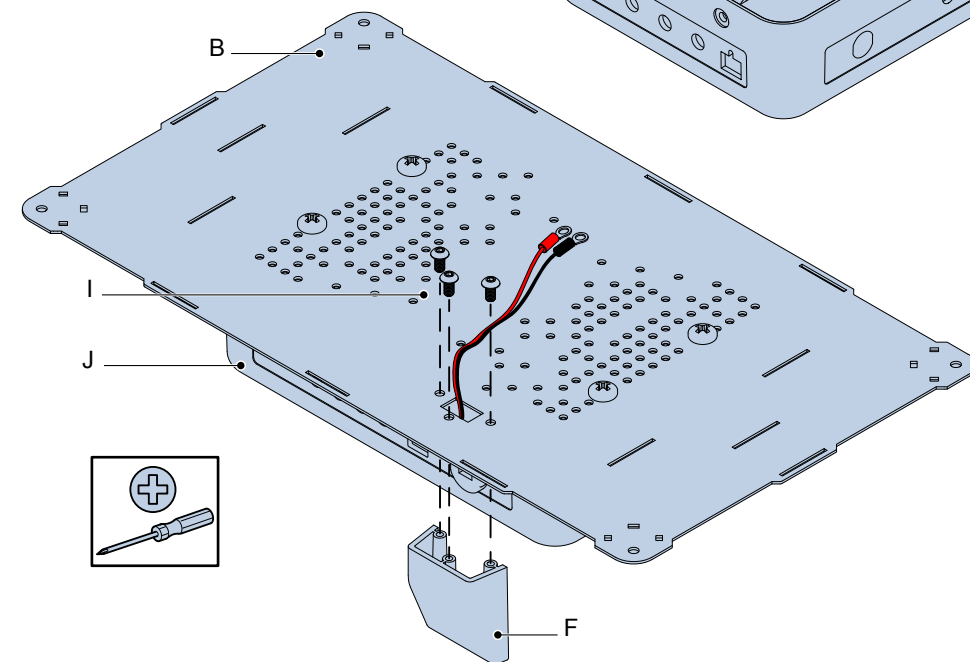

## Quick Installation Guide SHS 200 Battery Box

www.victronenergy.com


Before closing the box, connect the battery cables to the battery terminals. Respect cable polarity as described on the following graph. For multiple batteries, connect them in parallel array, to maintain 12v operating voltage.

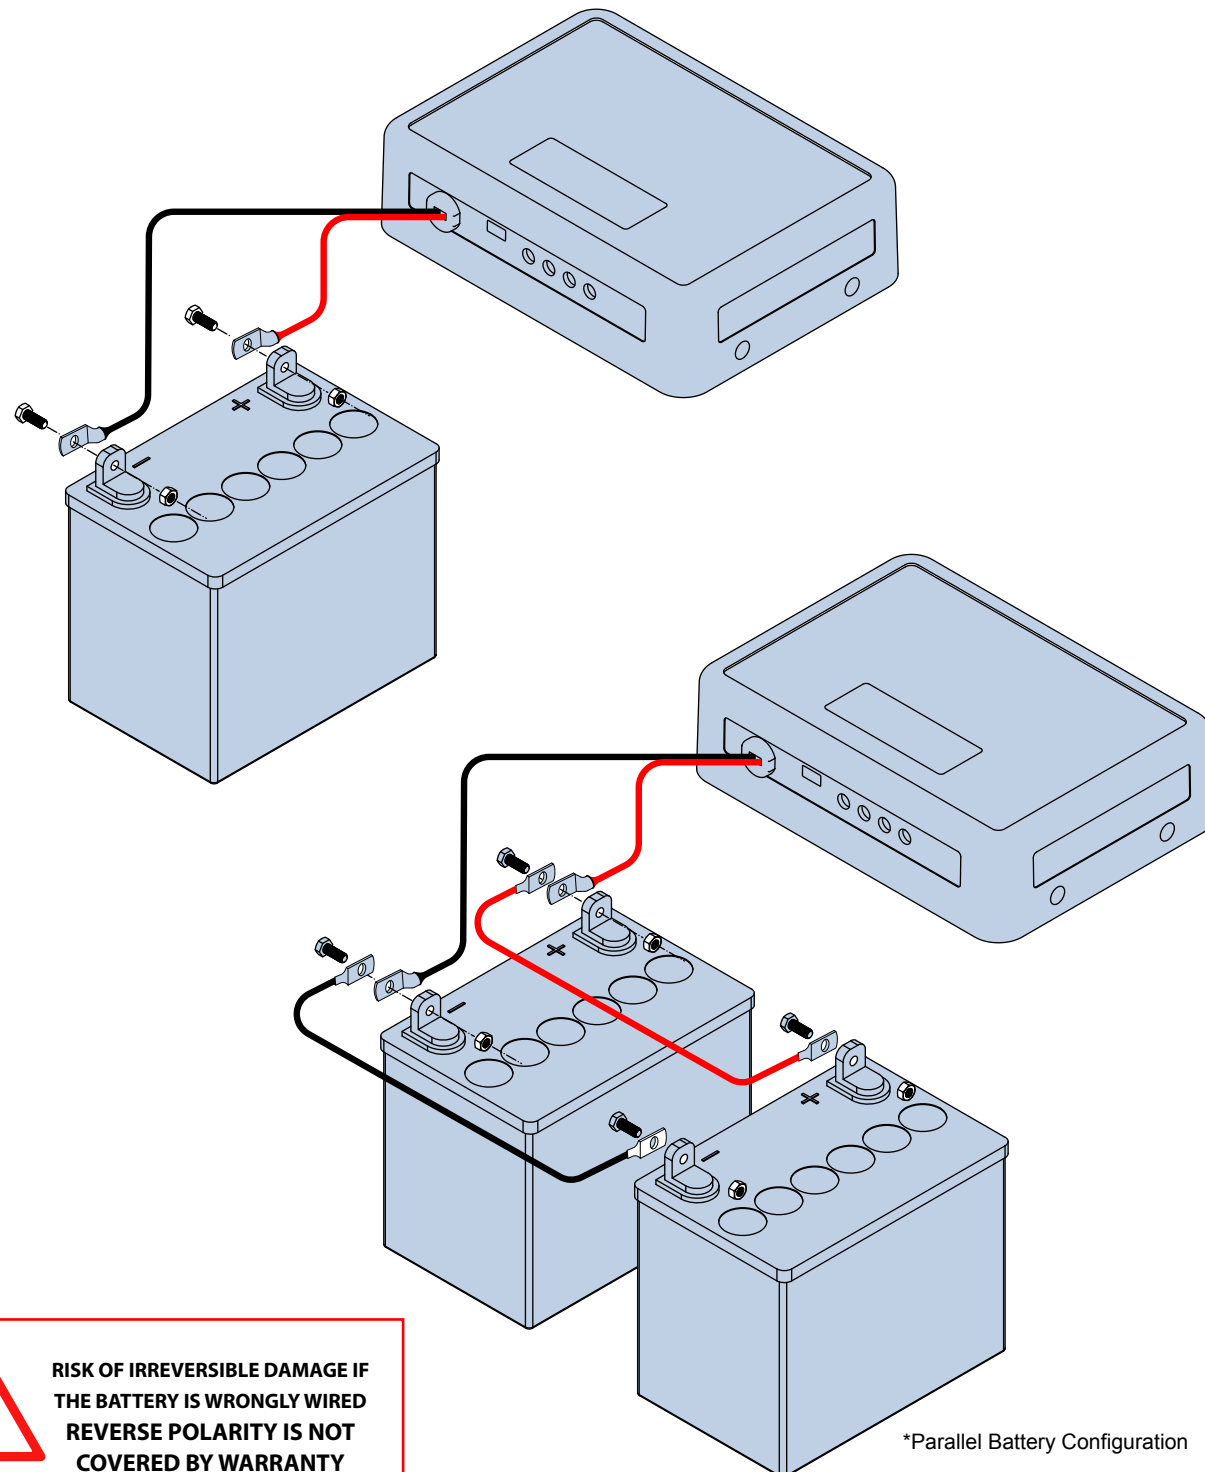


\*Parallel Battery Configuration

**⚠ RISK OF IRREVERSIBLE DAMAGE IF THE BATTERY IS WRONGLY WIRED  
REVERSE POLARITY IS NOT COVERED BY WARRANTY**


Before closing the battery box make sure the SHS-200 has turned ON.

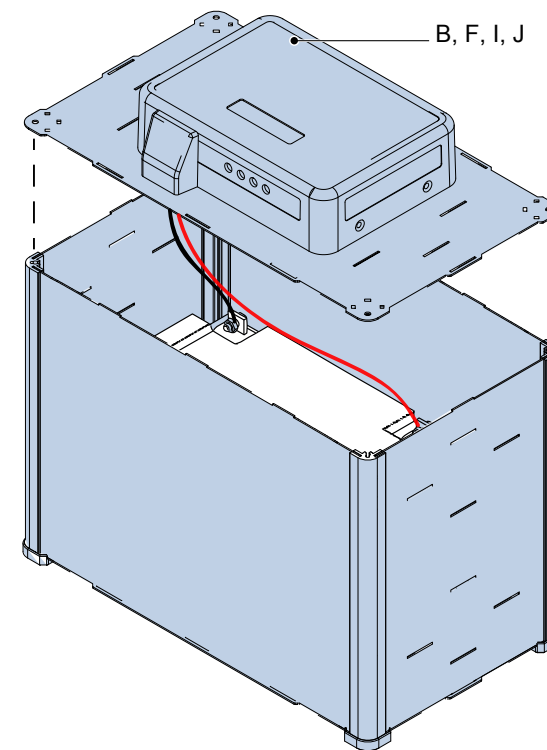

Fix the top plate by screwing four screws inside the profiles. Snap-in four corner-caps on top of each screw head.

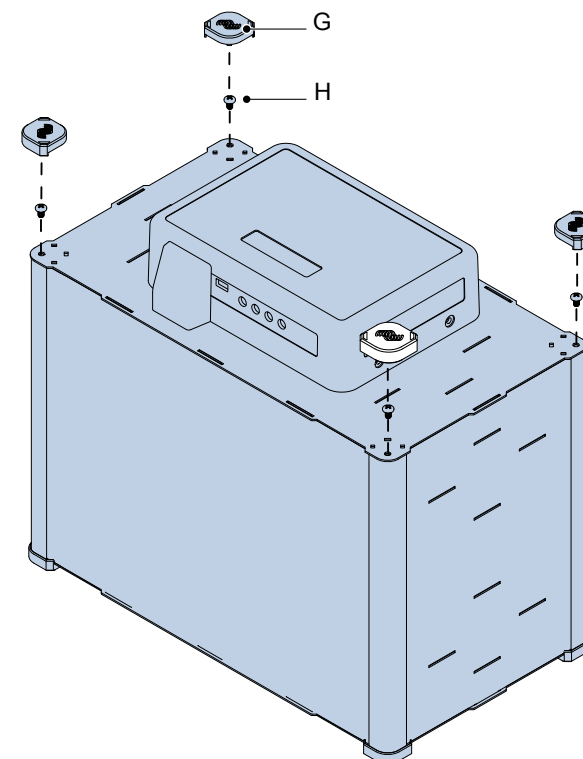

Optional: To add extra protection against tampering, place 2 warranty void labels connecting side-plate with top-plate.

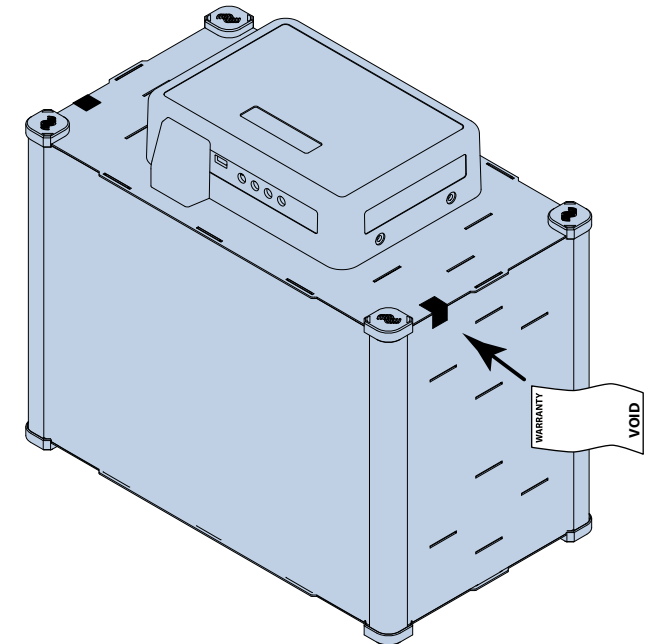

Now, you are ready to connect the solar panel and appliances to the SHS-200.

