

PTS100/200 PAIR TRACING SYSTEM

TESTING | TROUBLESHOOTING | ACCURACY

Product Features:

The PTS Pair Tracing System comprises the PTS 200 Tone Generator and the PTS 100 Probe in a woven polyester carrying pouch. The System is designed to provide an easy to use and cost effective means of tracing wire pairs.

PTS 200 Tone Generator

The PTS 200 may be connected via the modular plug or the crocodile clips to the pair under test. Depending on the switch position the Tone Generator will test Polarity continuity or short circuits. The PTS 200 can be used on twisted pair wiring (Telecom, Datacom, security / alarm, audio and electrical), single conductors, coaxial cables, de-energized AC wiring and just about any other wiring you can think of.

PTS 100 Probe

The PTS 100 Probe has a built-in loudspeaker to make it easy to hear the tracing signals and a near/far sensitivity adjustment to allow both broad searches and pinpoint identification of wires. To operate just press the button on the top and adjust the sensitivity control to hear the tone.

Key Specifications

- Fast, Accurate Wire Identification
- Sends Tone to Identify Wires
- Polarity Indication
- Continuity Test
- Adjustable Volume Control
- Easy to Operate
- 2-Line Modular Test Lead
- Rugged Industrial design
- Water Resistant

ORDERING INFORMATION:

M0113

PTS100/200 RJ11 Kit



Follow us on Social Media
@TempoComms

 **TEMPO**
COMMUNICATIONS

Renewed Vision. Innovation Forward.

SPECIFICATIONS:

PTS 200 Tone Generator	
Electrical:	
Output Power (into 600Ω)	-3dBm±3dB
Output Frequency (nominal)	1004Hz±100Hz
Sweep Rate	6Hz
Voltage Protection (into a 600Ω Circuit):	60VDC
Power Source:	
Battery:	1 x 9V (not included)
Battery Life (nominal):	290 hours
Environment:	
Operating Temperature:	0°C to 50°C
Storage Temperature:	-20°C to +60°C
Relative Humidity:	0 - 90%
Physical:	
Length:	125mm
Width:	33mm
Depth:	23mm
Weight:	0.13kg
Warranty:	One Year

SPECIFICATIONS:



PTS 100 Tone Probe	
Electrical:	
Gain Range:	30dB
Input Impedance:	100MΩ
Frequency Range (approx):	500Hz - 1200Hz
Voltage Protection (into a 600Ω Circuit):	60VDC
Power Source:	
Battery:	1 x 9V (not included)
Battery Life (nominal):	15 to 25 hours
Environment:	
Operating Temperature:	0°C to 50°C
Storage Temperature:	-20°C to +60°C
Relative Humidity:	0 - 90%
Physical:	
Length:	210mm
Width:	32mm
Depth:	42mm
Weight:	0.13kg
Warranty:	One Year

PAIR TRACING

Connect the Tone Generator to the pair to be traced. Check that the tone is being sent before leaving the oscillator. PTS100 Probe detects the electrostatic field around the wire pair and outputs it to the integral speaker after filtering to reduce mains interference. In most circumstances the low sensitivity setting will work well but if the signal is weak or noisy then choosing the higher sensitivity setting may help.

Placing the probe alongside the pair gives a strong signal except where the wires cross. Here there should be a noticeable null. Move the probe back and forth along the wire to confirm this. Placing the tip in the centre of an opened twist of the pair should give a minimum signal. If it does not decrease, suspect a split pair (two wires from different pairs) or a faulty pair one wire broken or high resistance.

Shorting the pair should cause the signal to completely disappear or fall to a very low level. This verifies that you have the right pair.

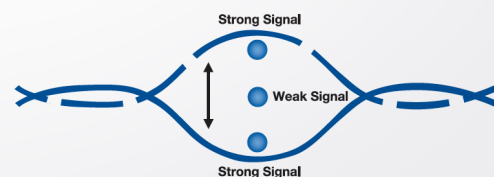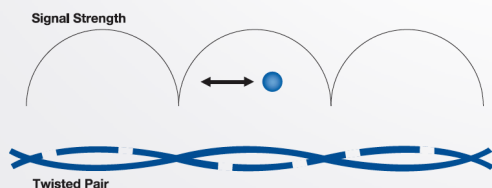

1390 Aspen Way Vista, CA • 92081 PTS100-200 06/23
Latin America Phone: 1.760.510.0558 | EMEA Phone: +44 (0) 1633 927050
 ©2023 Tempo Communications Inc. • An ISO 9001 Company
EMEA Office: Tempo Europe Limited
 Brecon House, William Brown Close, Cwmbran • NP44 3AB, UK
India & SAARC Region Sales
 Email Sales: indiasales@tempocom.com
 Email Support: indiasupport@tempocom.com
TempoCom.com | tel 800.642.2155



Renewed Vision. Innovation Forward.



Follow us on Social Media
@TempoComms