

WAVESERIES WAZ6 TTA EX

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Similar to illustration



WAS/WAZ6 TTA is a universal signal converter and trip amplifier that can be configured on the PC. Combines the functions of isolation, transmission, linearisation and trip amplification in a single module.

These exceptional characteristics and outstanding configurability combine to make the TTA truly unique. The TTA functions with stability and precision under a wide range of voltages and ambient temperatures. It is compatible with all standard sensor types.

- Universal input signals: temperature signals such as resistance thermometer, thermocouple, potentiometer, frequency transmitter, DC voltage signals and current signals
- Loop-powered or passive input
- Wide-range power supply: 18 – 264 V AC/DC
- User-defined linearization
- Inputs and outputs can be configured on PC
- Combined analogue and relay output
- Ambient temperature range: -40 °C ...70 °C

The CBX200 USB interface is used to connect to the PC. The WAS/WAZ6 TTA is also offered as an option with ATEX Zone 2 and UL C1D2 approvals.

General ordering data

Type	WAZ6 TTA EX
Order No.	8964320000
Version	EX signal isolating converter, Limit value monitoring, Tension-clamp connection
GTIN (EAN)	4032248782284
Qty.	1 pc(s).

**WAVESERIES
WAZ6 TTA EX**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Length	100 mm	Length (inches)	3.937 inch
Width	45 mm	Width (inches)	1.772 inch
Depth	112.4 mm	Depth (inches)	4.425 inch
Net weight	280 g		

Temperatures

Humidity	5...95 %, no condensation	Operating temperature, max.	70 °C
Operating temperature, min.	-40 °C	Storage temperature, max.	85 °C
Storage temperature, min.	-40 °C	Operating temperature	-40 °C...70 °C
Storage temperature	-40 °C...85 °C		

Probability of failure

MTTF	138 Jahre
------	-----------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Input

Number of inputs	1	Sensor	Thermocouples: B, E, J, K, L, N, R, S, T (IEC 60584), PT100, PT1000, (EN 60571) Ni100, Ni1000, (JIS1604), Cu10, Cu25, Cu50, Cu100 (DIN 43760) 2-/3-/4-wire
Sensor supply	24 V DC / 22 mA	Input voltage	-200...500 mV (min. 4 mV span), -20...50 V DC (min. 0.5 V span)
Input current	-20...+50 mA (min. interval 0.4 mA)	Input frequency	2 Hz...100 kHz
Resistance	10 Ω...5 kΩ	Potentiometer	100 Ω...100 kΩ

General data

Accuracy	< 0.1 % span (DC, RTD); 0.2 % span (or 1 °C) + CJ failure	Configuration	Using free Windows software, TTA Set Software
Power consumption	< 3.5 W	Step response time	50 ms...1 sec (RTD, mV inputs), 110 ms...1 sec (V, mA inputs)
Temperature coefficient	< 0.1 % / K (DC, RTD); < 0.1 % FSR / K + CJ error 0.07 °C/K (thermocouples)	Voltage supply	24...240 V AC/DC; 24...36 V AC / 24...50 V DC (ATEX Zone 2)

Insulation coordination

Clearance & creepage distances	≥ 5.5 mm (1 mm _{input/output})	EMC standards	EN 55011, EN 61000-6
Impulse withstand voltage	6 kV	Insulation voltage	2.5 kV
Pollution severity	2	Rated voltage	300 V
Surge voltage category	III		

Creation date May 28, 2019 12:36:55 AM CEST

WAVESERIES
WAZ6 TTA EX

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Output (analogue)

Load resistance current	< 700 Ω	Load resistance voltage	> 10 k Ω @ 0...10 V / > 20 k Ω @ -10...+10 V
Output current	adjustable between 0 and 20 mA (min. span of 5 mA)	Output voltage	adjustable between -10...+10 V (min. span 2.5 V)
Signal output	direct or inverted	Transmit function	Linear, $x^{1/2}$, $x^{3/2}$, $x^{5/2}$ or user-defined curve (101 points)

Output (digital)

Number of digital outputs	2	Type	2 x 1 CO contact (hard gold-plated), Process alarms (4x) with hysteresis, with alarm delay (configurable) 0...180 s
Max. switching voltage, AC	250 V		

Connection data

Type of connection	Tension-clamp connection	Stripping length, rated connection	7 mm
Clamping range, rated connection	2.5 mm ²	Clamping range, min.	0.5 mm ²
Clamping range, max.	2.5 mm ²		

Classifications

ETIM 3.0	EC002479	ETIM 4.0	EC002479
ETIM 5.0	EC002479	ETIM 6.0	EC002653
UNSPSC	30-21-18-01	eClass 5.1	27-21-01-07
eClass 6.2	27-21-01-07	eClass 7.1	27-21-01-07
eClass 8.1	27-21-01-07	eClass 9.0	27-21-01-20
eClass 9.1	27-21-01-90		

Product information

Product information

WAS/WAZ6 TTA is a universal signal converter and trip amplifier that can be configured on the PC. Combines the functions of isolation, transmission, linearisation and trip amplification in a single module. These exceptional characteristics and outstanding configurability combine to make the TTA truly unique. The TTA functions with stability and precision under a wide range of voltages and ambient temperatures. It is compatible with all standard sensor types.

- Universal input signals: temperature signals such as resistance thermometer, thermocouple, potentiometer, frequency transmitter, DC voltage signals and current signals
- Loop-powered or passive input
- Wide-range power supply: 18 – 264 V AC/DC
- User-defined linearization
- Inputs and outputs can be configured on PC
- Combined analogue and relay output
- Ambient temperature range: -40 °C ...70 °C

The CBX200 USB interface is used to connect to the PC.
 The WAS/WAZ6 TTA is also offered as an option with ATEX Zone 2 and UL C1D2 approvals.

Data sheet

**WAVESERIES
WAZ6 TTA EX**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Approvals

Approvals



ROHS Conform

Downloads

Approval/Certificate/Document of Conformity	ATEX certification DNV GL Certificate Declaration of Conformity
Brochure/Catalogue	CAT 4.1 ELECTR 16/17 EN
Engineering Data	EPLAN, WSCAD
Software	Install_TTASet_V107.zip
User Documentation	Manual english, deutsch, france Instruction sheet

**WAVESERIES
WAZ6 TTA EX**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Drawings




Screenshot of TTA Set software




connection to your PC

Isolator

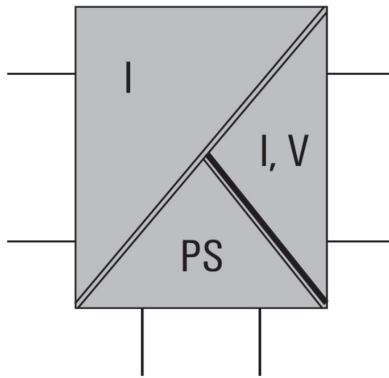


connection to your PC


Converter

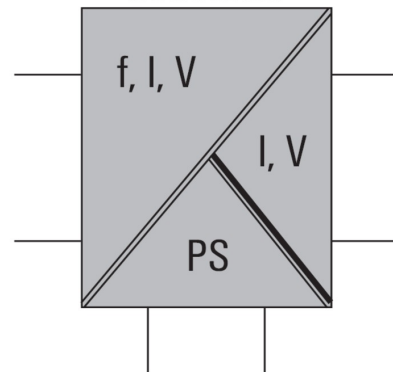

Transmitter

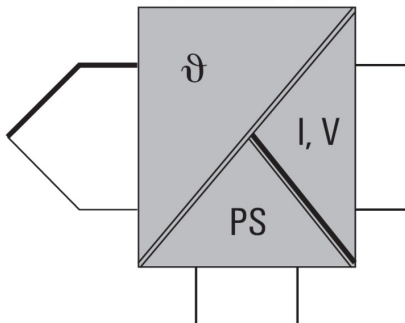

Lineariser

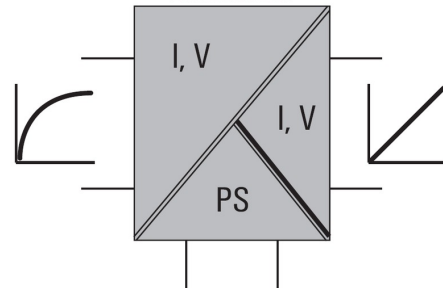

**WAVESERIES
WAZ6 TTA EX**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Drawings

