

# Panasonic

ideas for life



## KT Series Temperature Controller



# KT Series


## Overview



- ### Common Features
- ▶ Multi-input: Versatile thermocouple, RTD, DC Current, DC Voltage
  - ▶ Control modes: PID, on/off control, Anti-Reset-Windup (ARW)
  - ▶ Control output: Relay, non-contact voltage output (for SSR drive, DC current output)
  - ▶ Accuracy:  $\pm 0.2\%$  span
  - ▶ Simple operation
  - ▶ Heater-burn-out alarm available
  - ▶ Alarm output with 9 different operation modes
  - ▶ RS485 ASCII/Modbus communication available
  - ▶ Supply voltage: 24V AC/DC or 100 to 240V AC
  - ▶ Compliant with UL, CSA standards and CE marking

- ### Multi-input:
- ▶ Thermocouples K, J, R, S, B, E, T, N, PL-II, C(W/Re5-26)
  - ▶ RTD Pt100, JPt100, 3-conductor system
  - ▶ DC current 0/4 - 20mA
  - ▶ DC Voltage 0 to 1V, 0 to 5V, 1 to 5V, 0 to 10V

### Application examples:

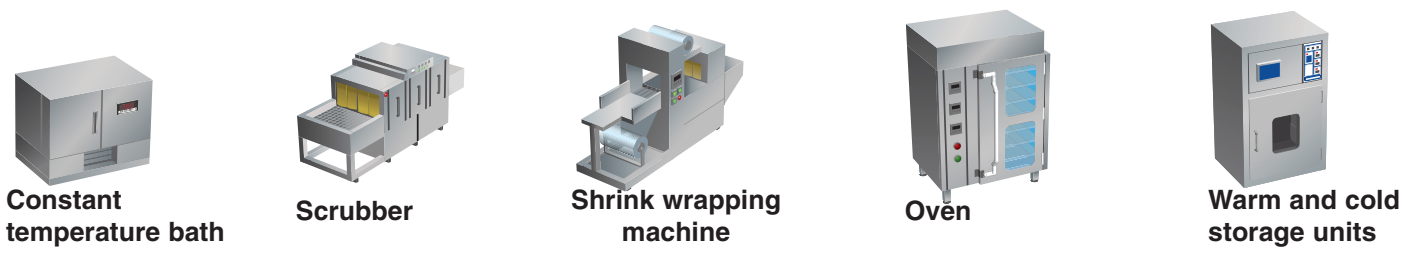


### Output Methods:

| Output method                | Characteristics   |
|------------------------------|---|
| Relay contact output         | Relay contact output is used for switching up to 3A 250V AC (resistive load) in applications in which the on-off frequency is low.  |
| Voltage output for SSR drive | This voltage output is used for driving the SSR . Since the SSR is a semiconductor relay, contact life is long. This type is used in applications in which the on-off frequency is high. Up to 40mA 12V DC can be switched. |
| DC current output            | This current output is used to control a power regulator. Smooth and accurate control is possible because phase control corresponds to the current output.  |

# KT Series

## Display and Operation

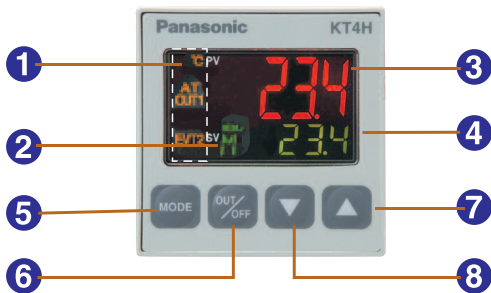

### 1 Indicators (backlight: orange)

- °F °C** Lights up respectively when temperature unit F°/C° is selected.
- T/R** Light ups during serial communication (option) TX output.
- AT** Flashes during auto-tuning or auto-reset.
- OUT1** Lights up when control output is ON or Heating output (option) is ON.  
For DC current output type, it flashes corresponding to the manipulated variable in 0.25 second cycles.
- OUT2** Lights up when Cooling output (option) is ON.
- EVT1** Lights up when Alarm 1 output is ON.
- EVT2** Lights up when Alarm 2 output (option) is ON or Heater burnout alarm (option) is ON.
- LOCK** Lights up when Lock 1, Lock 2 or Lock 3 is selected.

- 2 MEMO display** Indicates the set value memory number (backlight: green).
- 3 PV display** Indicates the PV (process variable) (backlight: red/orange/green).
- 4 SV display** Indicates the SV (set value) (backlight: green).
- 5 Mode key** Selects the setting mode and registers the set value.
- 6 OUT/OFF key** Switches the control output ON or OFF and selects Auto/Manual control.
- 7 Increase key** Increases the numeric value.
- 8 Decrease key** Decreases the numeric value.

### KT2 display and operation features:





# KT4H

## Product Types

### Temperature Controller KT4H

*Space saving, high performance*

- 1/16 DIN size temperature controller
- Size 48 x 48 x 56mm (WxHxD)
- Panel-mounted type
- IP66 waterproof (frontside if panel mounted)
- 2nd optional alarm output
- Heating and cooling control with 2nd optional control output (non-contact voltage output)
- 11-segment display with 3 colours for PV
- 4 set values (externally selectable)
- Tool Port as standard
- MEWTOCOL communication
- Heater burnout alarm supports 3-phase heaters



### Ordering code

**A K T 4 H 1 1 1 1 0 0 1**

**Power supply**  
1=100 to 240V AC  
2=24V AC/DC

**Sensor input**  
1=multi-input

**Control output**  
1=relay  
2=non-contact voltage  
3=DC current

**Alarm output**  
1=alarm1 relay  
2=alarm1 and alarm2 relay

**Communication function**  
blank=not available  
1=RS485  
2=contact input

**Heater burnout alarm**  
0=not available  
3=20A single phase  
4=50A single phase  
5=20A three phase  
6=50A three phase

**Heating/Cooling control output**  
0=no control output 2  
1=relay  
2=non-contact voltage

**In stock:**

- AKT4H111100
  - AKT4H112100
  - AKT4H113100
  - AKT4H211100
  - AKT4H212100
  - AKT4H213100
  - AKT4H1111001
  - AKT4H2111001
- other types on demand




# KT4H

## New Features of KT4H (in comparison with KT4)

### Better readability

- Time-proven display with negative LCD + LED backlight
- 11-segment LCD with improved readability
- Largest display of PV in its class
- PV indication in three different colour

1. With negative type LCD and backlight, values can be read even under direct sunlight. Also, the 11-segment LCD displays make it easier to read alphanumeric characters



2. The letter height of PV value has been enlarged to 12mm enabling it to be directly read even from a distance.




3. The ability of the PV value to change color makes it easy to determine the process status at a glance (three colour available).




### Improved control functions

- Capable of 4-point temperature selection by external input.
- Control output can be turned ON and OFF externally.
- 3-phase heater burn-out detection function.
- Non-contact voltage output in heating/cooling control output available.


1. Four setting values (SV) selectable using external input (option).

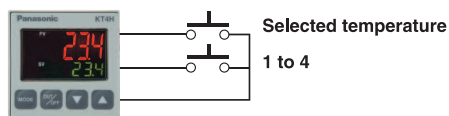

2. External ON and OFF switching of control output possible (option).

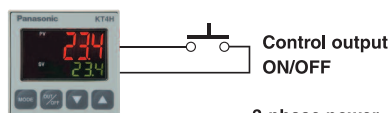

3. Heater burn-out alarm supports 3-phase heaters (option).

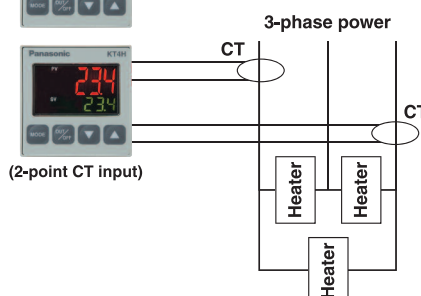

4. Supports voltage output for heating/cooling control (for SSR drive) (option).



# KT4H

## New Features of KT4H (in comparison with KT4)

### Improved communication functions

#### . Connect several KT4H to FP-Series PLCs


MEWTOCOL communications protocol is built in. Up to 31 units can be connected and data can be collected using a FPΣ(Sigma) PLC.

Comes with MEWTOCOL. Collect data with the PLC.




#### . Standard external tool port

With the external tool port, all settings can be loaded and made.

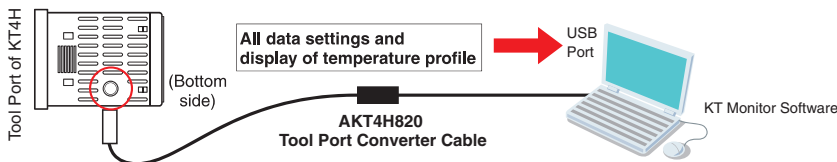

### Space savings

Control panel installation length has been shortened to the utmost.

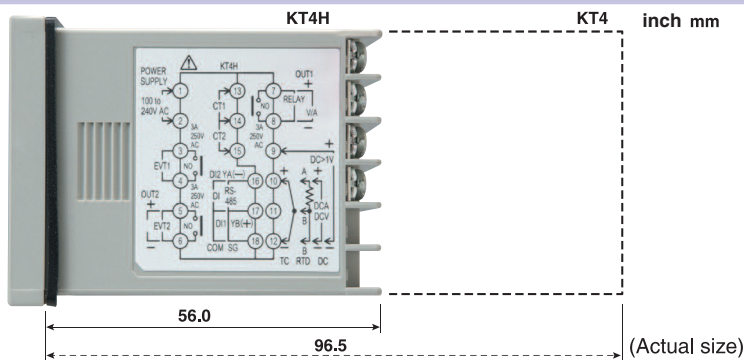

### Ability to use any sensor (input) is inherited from KT Series

The KT4H comes equipped with the ability to use any sensor (input): thermocouple (10 types), RTD (2 types), DC current (2 types), and DC voltage (4 types).

### High accuracy and high sampling period also inherited from KT Series

The operation mode uses "PID control" which allows a stable temperature to be maintained. Capable of high accuracy with an input span of  $\pm 0.2\%$  and a high-speed sampling period of 250ms.

### Easier operation

- The switch layout has been changed so that mode changes can be executed more easily using the front keys.
- Improved switch construction provides a much more positive clicking action.

### Protective construction


Despite its compact size, protective structure conforms to IP66 (front panel only, when using rubber packing).

# KT4H

## KT-Monitor Software

KT-Monitor is a convenient software tool for editing the parameters of KT4H, saving parameters in a file, monitoring of temperature data, and monitoring and saving log files of designated values.

### KT-Monitor Main Window

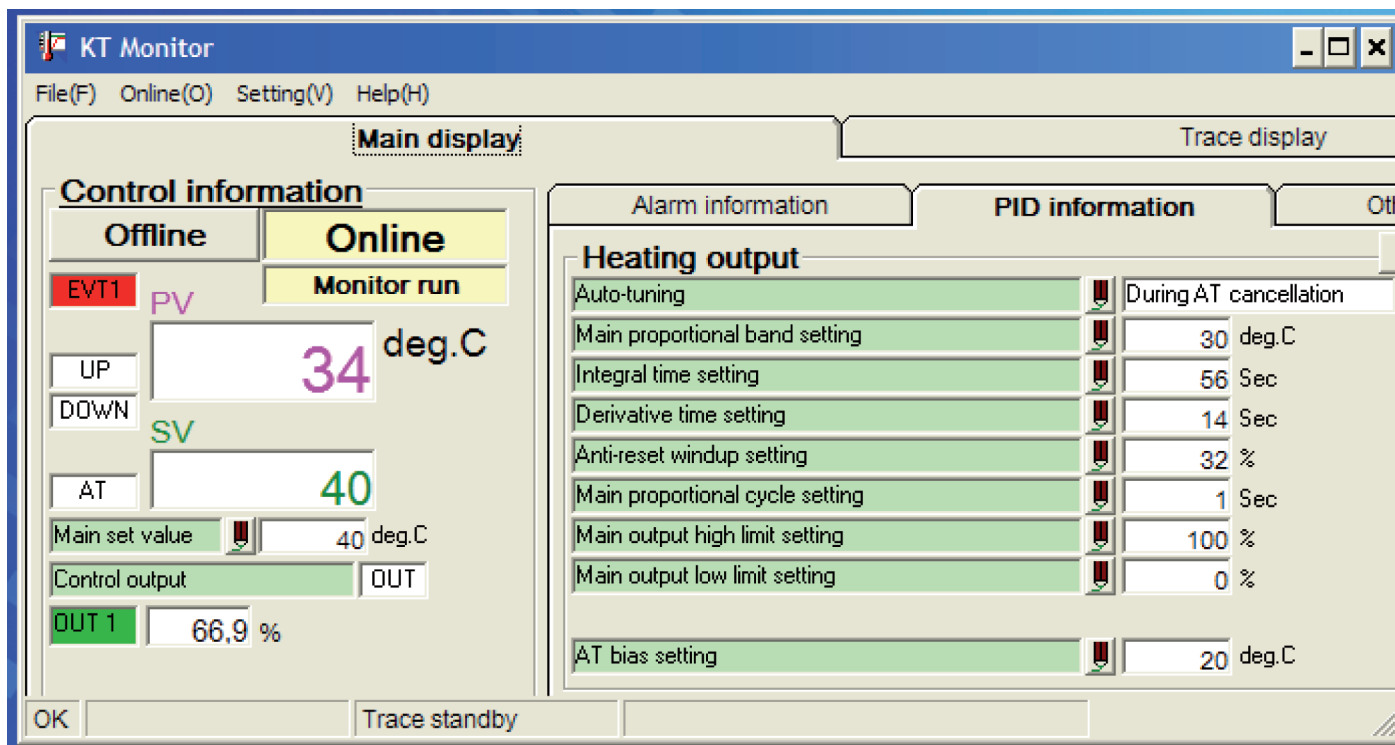

Parameters can easily be understood and are accessible in a clear, convenient form.



#### Ordering information: KT-Monitor Set

CD with Software, Manuals, Tool Port cable AKT4H820

#### Requirements:

PC with Windows 98/ME/2000 or XP, USB-Port, Tool cable AKT4H820, USB driver installed (included with KT-Monitor)




# KT4H

## KT-Monitor Software

### Sampling and trend monitoring of PV, SV, MV1 and MV2

#### KT-Monitor Trace display

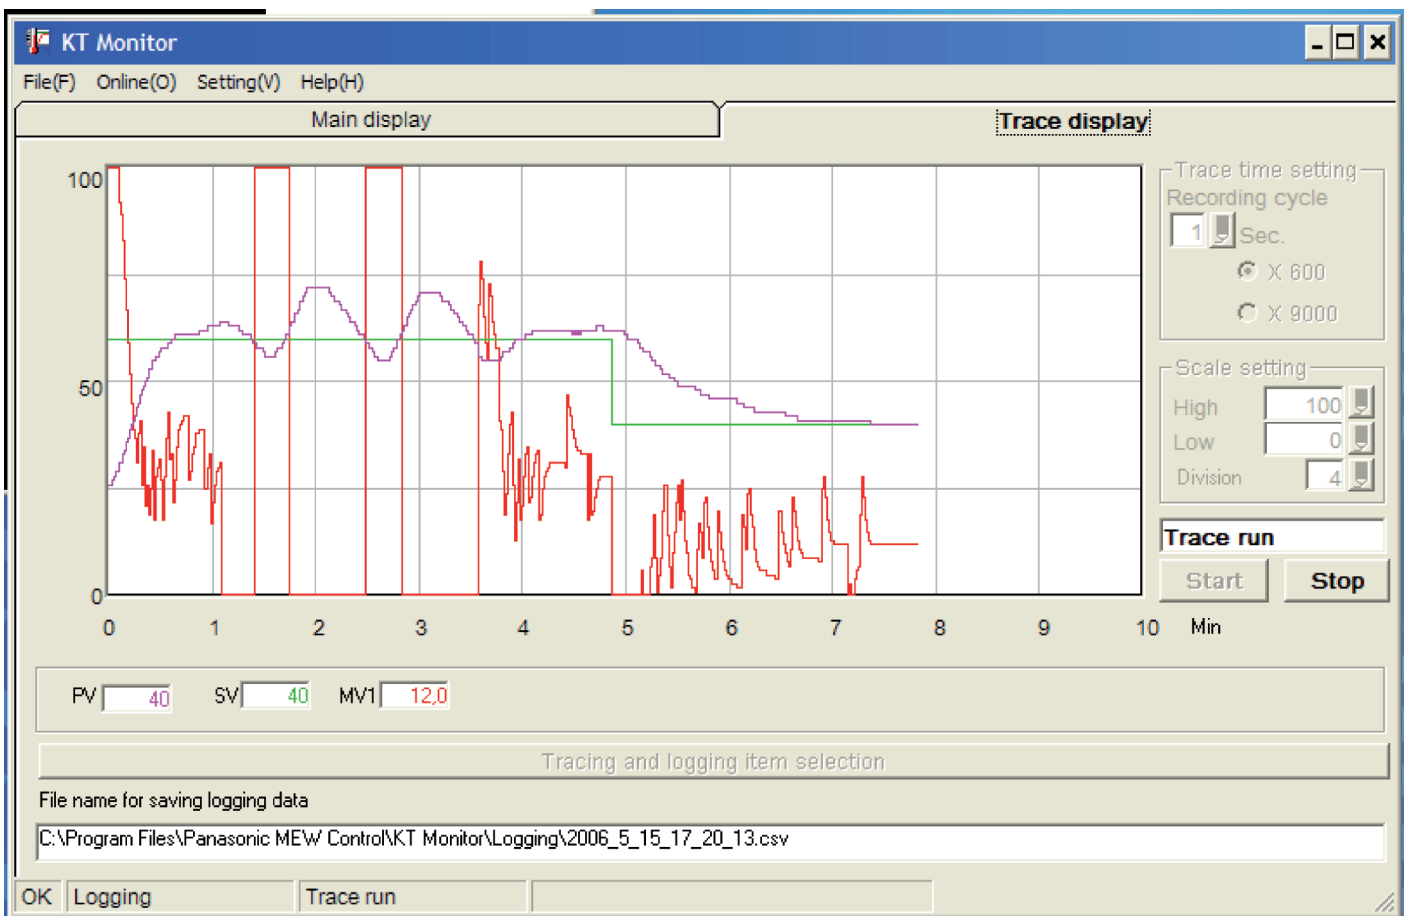

With the Trace display you can display and analyze the temperature PV, the set value SV and the control output MV. MV2 will be indicated only when Heating/Cooling control option is added. All values can also be recorded into a CSV-File for later rework with e.g. Excel.

The colours of the traces are selectable. The recording time interval is selectable (min. 1 sec.) and also the total number of records can be selected between 600 (10 min.) and 9000 (150 min.).

For scaling of the displayed values, high and low limit values can be entered.





# KT2

## Product Types

### Temperature Controller KT2

*Tiny size – pattern control*

- 1/32 DIN size temperature controller
- Size 48 x 24 x 98.5mm (WxHxD)
- 9-step pattern control (ramp function)
- Panel-mounted type
- IP66 waterproof (front side if panel mounted)
- 2 set values possible (externally selectable)
- 2nd optional alarm output
- Heating and cooling control with 2nd optional control output (relay)
- Analogue value converter function



### Ordering code

**A K T 2 1 1 1 1 0 0 1**

**Power supply**  
1=100 to 240V AC  
2=24V AC/DC

**Sensor input**  
1=multi-input

**In stock:**  
AKT2111200  
AKT2112200  
AKT2113200  
AKT2211200  
AKT2212200  
AKT21111001  
AKT22120101  
AKT22121001  
other types on demand

**Control output**  
1=relay  
2=non-contact voltage  
3=DC current

**Alarm output**  
0=no alarm output  
1=1 alarm output\*  
2=2 alarm outputs, 1 relay,  
1 open collector output

**RS485 interface**  
blank=not available  
1=available

**Heater burnout alarm**  
0=not available

**Heating/Cooling control output**  
0=no control output 2  
1=relay 3A 250V AC

\* Type depends on other options



# KT4

## Product Types

### Temperature Controller KT4

*Small sized standard type*

- 1/16 DIN size temperature controller
- Size 48 x 48 x 95mm (WxHxD)
- Panel-mounted type
- IP66 waterproof (frontside if panel mounted)
- 2nd optional alarm output
- Heating and cooling control with 2nd optional control output (non-contact voltage output)



### Ordering code

**A K T 4 1 1 1 1 0 0 1**

**Power supply**  
1=100 to 240V AC  
2=24V AC/DC

**Sensor input**  
1=multi-input

- In stock:**
- AKT4111100
  - AKT4111200
  - AKT4112100
  - AKT4112140
  - AKT4113100
  - AKT4211100
  - AKT4211140
  - AKT4212100
  - AKT4212140
  - AKT41111001
  - AKT42111001
- other types on demand

**Control output**  
1=relay  
2=non contact voltage  
3=DC current

**Alarm output**  
1=alarm 1 relay  
2=alarm1 and alarm2 relay

**Heating/Cooling control output**  
0=no control output 2  
4=SSR output 0.3A 250V AC

**Communication function**  
blank=not available  
1=RS485

**Heater burnout alarm**  
0=not available  
1=5A  
2=10A  
3=20A  
4=50A



# KT7

## Product Types

### Temperature Controller KT7

*Handy and slim*

- Size 22.5 x 75 x 100mm (WxHxD)
- Front screw terminals
- DIN rail mounting type
- Analogue value converter function



### Ordering code

A K T 7 1 1 1 1 0 0 1

**Power Supply**  
1=100 to 240V AC  
2=24V AC/DC

**Sensor input**  
1=multi-input

**In stock:**  
AKT7111100  
AKT7112100  
AKT7113100  
AKT7211100  
AKT7212100  
AKT7213100  
AKT71111001  
AKT71111001  
AKT72111001  
AKT72121001  
other types on demand

**Control output**  
1=relay  
2=non-contact voltage  
3=DC current

**Alarm output**  
0=alarm1 open collector

**Heating/Cooling control output**  
0=no control output 2

**Communication function**  
blank=not available  
1=RS485

**Heater burnout alarm**  
0=not available  
1=5A  
2=10A  
3=20A  
4=50A



# KT8

## Product Types

### Temperature Controller KT8

*Wide variety of options, easily readable display*

- 1/8 DIN size temperature controller
- Size 48 x 96 x 98.5mm (WxHxD)
- Panel-mounted type
- IP66 waterproof (front side if panel mounted)
- 2 set values possible (externally selectable)
- 2nd optional alarm output
- Heating and cooling control with 2nd optional control output (relay, non-contact voltage, or current)
- Ordering code



### Ordering code

**A K T 8 1 1 1 1 0 0 1**

**Power supply**  
1=100 to 240V AC  
2=24V AC/DC

**Sensor input**  
1=multi-input

**In stock:**  
AKT8111100  
AKT8112100  
AKT8112200  
AKT8212210  
AKT81122001  
AKT82122001  
other types on demand

**Control output**  
1=relay  
2=non-contact voltage  
3=DC current

**Alarm output**  
0=alarm1 open collector  
2=alarm1 and alarm2 relay

**Communication function**  
blank=not available  
1=RS485

**Heater burnout alarm**  
0=not available  
1=5A  
2=10A  
3=20A  
4=50A

**Heating/Cooling control output**  
0=no control output 2  
1=relay  
2=non-contact voltage  
3=current output





# KT9

## Product Types

### Temperature Controller KT9

*Big display*

- 1/4 DIN size temperature controller
- Size 96 x 96 x 98.5mm (WxHxD)
- Panel-mounted type
- IP66 waterproof (front side if panel mounted)
- 2 set values possible (externally selectable)
- 2nd optional alarm output
- Heating and cooling control with 2nd optional control output (relay, non-contact voltage, or current)
- Ordering code



### Ordering code

**A K T 9 1 1 1 1 0 0 1**

**Power supply**  
1=100 to 240V AC  
2=24V AC/DC

**Sensor input**  
1=multi-input

**In stock:**  
AKT9111100  
AKT9111110  
AKT9112100  
AKT9113230  
AKT9212100  
AKT9212120  
AKT91111001  
AKT92111001  
other types on demand

**Control output**  
1=relay  
2=non-contact voltage  
3=DC current

**Alarm output**  
1=alarm1 open collector  
2=alarm1 and alarm2 relay

**Communication function**  
blank=not available  
1=RS485

**Heater burnout alarm**  
0=not available  
1=5A  
2=10A  
3=20A  
4=50A

**Heating/Cooling control output**  
0=no control output 2  
1=relay  
2=non-contact voltage  
3=current output



# KT Series

## Ratings and Specifications

| Display                       |                            | Specifications   |                   |   |  |   |   |
|-------------------------------|----------------------------|--|-------------------|---|--|---|---|
|                               |                            | KT2  | KT4               | KT4H  | KT8  | KT9   | KT7   |
| Size (W x H x D)              |                            | 48 x 24 x 98.5mm   | 48 x 48 x 95mm    | 48 x 48 x 56mm  | 48 x 96 x 98.5mm   | 96 x 96 x 98.5mm  | 22.5 x 75 x 100mm                                   |
| Supply voltage (must be used) |                            | 100 to 240V AC   |                   |   |  |   |   |
| Frequency                     |                            | 24V AC/D   |                   |   |  |   |   |
| Power consumption             |                            | Approx. 5VA  | Approx. 8VA       | Approx. 8VA   | Approx. 8VA  | Approx. 8VA   | Approx. 6VA   |
| Input type                    |                            | Input range  |                   |   |  |   |   |
| Thermocoupl                   | K                          | -200 to 1370°C   |                   |   |  |   |   |
|                               | J                          | -199.9 to 400.0°C  |                   |   |  |   |   |
|                               | R                          | -200 to 1000°C   |                   |   |  |   |   |
|                               | S                          | 0 to 1760°C  |                   |   |  |   |   |
|                               | B                          | 0 to 1760°C  |                   |   |  |   |   |
|                               | E                          | 0 to 1820°C  |                   |   |  |   |   |
|                               | T                          | -200 to 800°C  |                   |   |  |   |   |
|                               | N                          | -199.9 to 400.0°C  | -200.0 to 400.0°C |   | -199.9 to 400.0°C  |   |   |
|                               | PL-II                      | -200 to 1300°C   |                   |   |  |   |   |
| C (W/Re5-26)                  |                            | 0 to 1390°C  |                   |   |  |   |   |
| RTD                           | Pt100                      | -200 to 850°C  |                   |   |  |   |   |
|                               | JPt100                     | -199.9 to 850.0°C  |                   |   |  |   |   |
|                               | 3-conductor system         | -200 to 500.0°C  |                   | -200 to 500.0°C   |  | -199.9 to 850.0°C   |   |
| DC Current                    | 4 to 20mA DC <sup>1)</sup> | -199.9 to 999.9, -199.9 to 999.9   |                   | -2000 to 10000  |  | -199.9 to 999.9, -199.9 to 999.9  |   |
|                               | 0 to 20mA DC <sup>1)</sup> | -19.99 to 99.99, -1.999 to 9.999   |                   |   |  | -19.99 to 99.99, -1.999 to 9.999  |   |
| DC Voltage                    | 0 to 1V D <sup>2)</sup>    |  |                   |   |  |   |   |
|                               | 0 to 10V D <sup>3)</sup>   |  |                   |   |  |   |   |
|                               | 1 to 5V D <sup>3)</sup>    |  |                   |   |  |   |   |
|                               |                            | <ul style="list-style-type: none"> <li>Scale and change to the decimal point for DC current and DC voltage.</li> <li>DC current input supported in external mounted 50 Ω shunt resistor (select option).</li> </ul>  |                   |   |  |   |   |
| Control output                | Relay contact              | 1a   | 1a                | 1b  | 1a1b   | 1ab   | 1a  |
|                               | Non-contact DC voltage     | 3A 250V AC (Relay load), 1A 250V AC (Inductive load cosφ=0.4), electric life: 100,000 times  |                   |   |  |   |   |
|                               | DC current                 | 12 ± 2% 14V DC; max. current: 40mA (Short-circuit protected)   |                   |   |  |   |   |
|                               |                            | 4 to 20mA load resistance: $\times 50 \Omega$  |                   |   |  |   |   |
| Alarm output1                 |                            | Relay contact 250V AC (Relay load)<br>Electric life: 100,000 times   |                   |   |  |   | Open detector, Control capacity: 24V DC 0.1A (Max.) |
| Control mode                  |                            | Actions mentioned below can be selected by key operation. [Default PID] PI D (with auto-tuning function), PI, PD (with manual reset function), P (with manual reset function), ON/OFF action   |                   |   |  |   |   |
| Accuracy                      |                            | Thermocouple: Within ±0.2% of each input span ±1 digit or within ±2°C whichever is greater<br>However, R and S input; within ±6°C in the range of 0 to 200°C<br>B input 0 to 300°C; Accuracy is not guaranteed.<br>K, J, E and N input less than 0°C: Within ±0.4% of input span ±1 digit<br>RTD: Within ±0.1% of each input span ±1 digit or ±1°C whichever is greater<br>DC current and DC voltage: Within ±0.2% of each input span ±1 digit |                   |   |  |   |   |
| Sampling period               |                            | 250ms  |                   |   |  |   |   |
| Hysteresis                    |                            | Thermocouple & RTD: 0.1 to 100.0°C<br>DC current and DC voltage: 1 to 1000 (The decimal point place follows the section)   |                   |   |  |   |   |
| Proportional band             |                            | Thermocouple: 0 to 1000°C<br>RTD: 0.0 to 999.9°C<br>DC current and DC voltage: 0.0 to 100.0%   |                   |   |  |   | 0.0 to 110.0%                                       |
| Integral time                 |                            | 0 to 1000 seconds  |                   |   |  |   |   |
| Derivative time               |                            | 0 to 300 seconds   |                   |   |  |   |   |
| Proportional cycle            |                            | 1 to 120 seconds   |                   |   |  |   |   |
| Allowable voltage fluctuation |                            | When 100 to 240V AC; 85 to 264V AC When 24V AC/DC; 20 to 28V AC/DC   |                   |   |  |   |   |
| Insulated resistance          |                            | 500V DC 10MΩ or greater  |                   |   |  |   |   |
| Breakdown voltage             |                            | 1.5KV AC for 1 min between input terminal and power terminal & between output terminal and power terminal  | See KT8/KT9       | 1.5KV AC for 1 min between input terminal and power terminal & between output terminal and power terminal | 1.5KV AC for 1 min between input terminal and ground terminal between input terminal and power terminal between power terminal and ground terminal between output terminal and ground terminal, & between output terminal and power terminal | 1.5KV AC for 1 min between input terminal and power terminal & between output terminal and power terminal |   |
| Malfunction vibration         |                            | 10 to 55Hz (0.35mm) to each direction (120msec sweep) for 10min.   |                   |   |  |   |   |



# KT Series

## Ratings and Specifications

| Display                  | Specifications  |   |   |  |   |                                       |  |
|--------------------------|---|---|---|--|---|---------------------------------------|--|
|                          | KT2   | KT4   | KT4H  | KT8  | KT9   | KT7                                   |  |
| Breakdown vibration      | 10 to 55Hz (0.75mm) to each direction (120ms sweep) for 10min.              |   |   |  |   |                                       |  |
| Malfunction shock        | X, Y & Z each direction for 5 times 10G                                     |   |   |  |   |                                       |  |
| Breakdown shock          | Same as above, but 30G  |   |   |  |   |                                       |  |
| Ambient temperature      | 0 to 50°C   |   |   |  |   |                                       |  |
| Ambient humidity         | 35 to 85%RH (No condensation)   |   |   |  |   |                                       |  |
| Mass                     | Approx. 120g  | Approx. 130g  | Approx. 120g  | Approx. 240g   | Approx. 370g  | Approx. 150g                          |  |
| Waterproof               | IP66 (applicable only to the front panel subject to rubber gasket employed) |   |   |  |   | None                                  |  |
| Display character height | PV: 8.7mm<br>SV: 8.7mm*   | PV: 10.2mm<br>SV: 8.8mm   | PV: 12mm<br>SV: 6mm                                   | PV: 11.2mm<br>SV: 11.2mm   | PV: 18mm<br>SV: 13.2mm  | PV: 7.4mm<br>SV: 7.4mm                |  |
|                          | Alarm output 2  | 0.1A 24V DC   |   |  |   | The same as the one of Alarm output 1 | None   |
| Options                  | Heating/Cooling control   | Relay contact:<br>1a 3A 250V DC<br>(Resistive load)             | Non contact relay<br>0.3A 250V AC<br>(Resistive load) | <ul style="list-style-type: none"> <li>Relay contact 1a: 3A 250V AC (Resistive load)</li> <li>Electric life: 100,000 times</li> <li>Non contact voltage: 12V DC <math>\pm</math>15% max. 40mA (Short circuit protected)</li> </ul> | <ul style="list-style-type: none"> <li>Relay contact: 1a 250VAC 3A (Resistive load), 250V AC 1A (Inductive load <math>\cos\phi=0.4</math>), Electric life: 100,000 times</li> <li>Non-contact voltage: 12 – 14V DC max. 40mA (Short-circuit protected)</li> <li>DC current: 4 to 20mA DC Load resistance: Max. 550</li> </ul> | None                                  |  |
|                          | Heater burn-out alarm   | Heater rated current must be selected from 5A, 10A, 20A and 50A |   |  |   |                                       |  |
|                          | Output  | Setting accuracy: Within 5% of heater rated current             |   |  |   |                                       |  |
|                          | Communication function  | None  |   |  |   |                                       | Relay contact 1a 250V AC 3A (Resistive load), Electric life: 100,000 times |
|                          | Tool Port   | None  |   |  |   |                                       | Open collector, Control capacity: 24V DC 0.1A (Max)                        |
|                          |   | RS485 interface for multidrop communication (details see below) |   |  |   |                                       |  |
|                          |   |   | None  | Communication interface C-MOS level, cannot be used at the same time as serial communication (option). This port can only be used with the tool cable (AKT4H820).  | None  |                                       |  |

\*PV/SV switching display




# KT Series


## Communication Function Overview

### Communication via RS485 and Modbus (ASCII) or Modbus RTU protocol

**Example 1**  
Multidrop communication with a programmable logical controller (PLC)

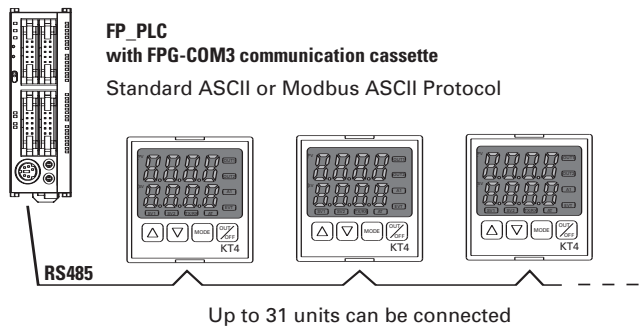

**Example 2**  
Multidrop communication with a personal computer

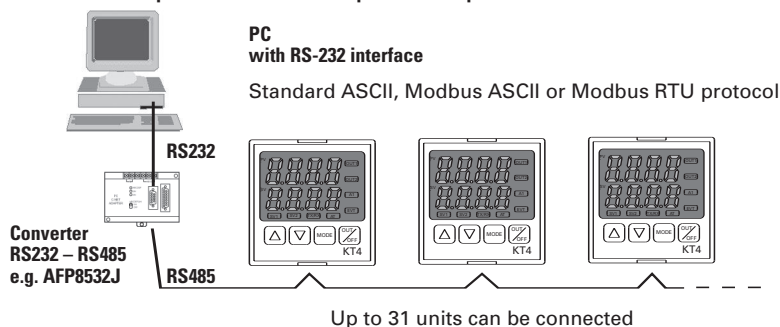

With the optional communication function all settings can be entered or changed.  
Input value (PV) and other parameters can be read easily.  
All commands are described in the KTC1E1 manual.

### Communication via MEWTOCOL (slave) with any FP-Series PLC\*

| Item                 | Specification  |
|----------------------|--|
| Communication type   | Half-duplex  |
| Communication speed  | Select 2400, 4800, 9600, or 19200 bps using key operation.   |
| Synchronization type | Asynchronous   |
| Protocols            | Standard protocol (ASCII), Modbus (ASCII) or Modbus RTU mode (8-bit binary coding), KT4H also MEWTOCOL (Slave)                     |
| Coding               | ASCII/binary   |
| Error correcting     | Command re-send  |
| Error detection      | Parity check, CRC-16 (RTU), LRC (ASCII)  |
| Data structure       | Start bit: 1<br>Data bit: 7 (ASCII), 8 (RTU)<br>Parity: Even, No, Odd (Selectable), KT2: Even (ASCII), None (RTU)<br>Stop bit: 1/2 |
| Interface            | RS485 compliant  |
| No. of nodes         | 31   |
| Maximum cable length | 1,000 m (cable resistance must be within 50Ω)  |

Note) That main setting no. 2 is not possible on the KT8 and KT9 when the communications functions are added.


\* Only for KT4H




# KT2

## Dimensions


KT2 Series (unit: mm)

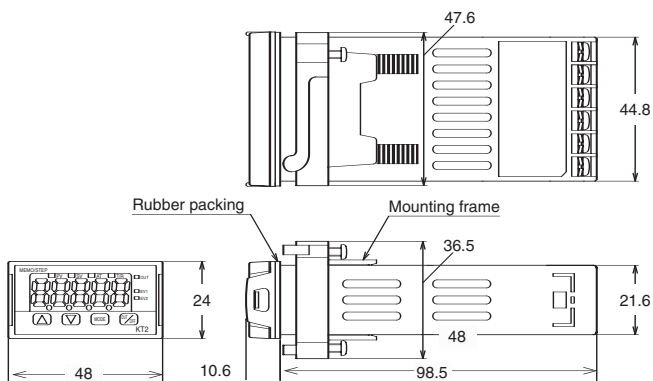


• Panel cutout

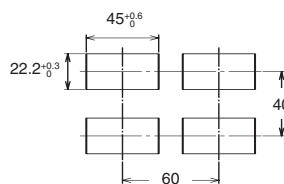

KT4 Series (unit: mm)

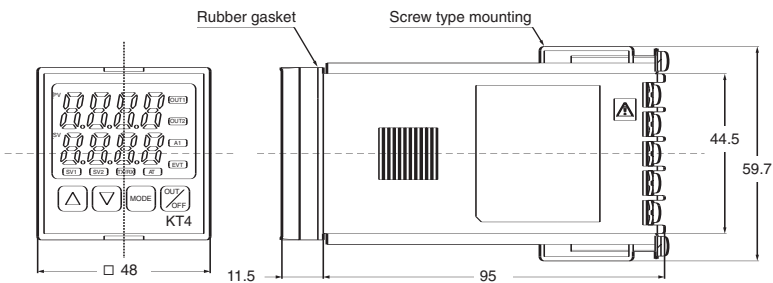


• Panel cutout

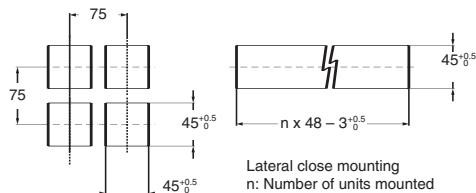


Note) The communications terminal is the screw terminal on the back of the unit.

KT4H Series (unit: mm)

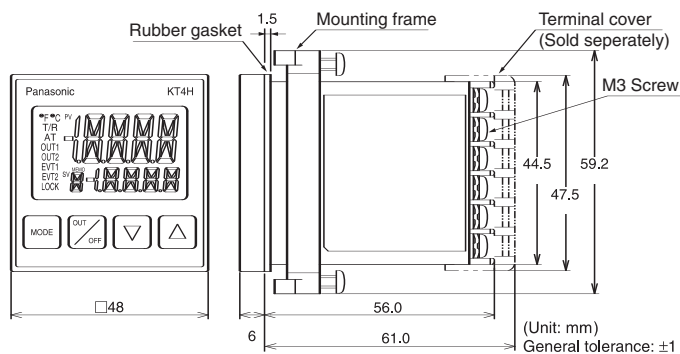

• Panel cutout

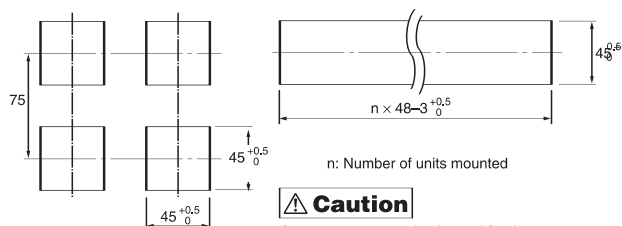

**Caution**


If lateral close mounting is used for the controller, IP66 specification (Dust-proof/Drip-proof) may be compromised, and all warranties will be invalidated.




# KT Series

## Dimensions

### KT8 Series (unit: mm)

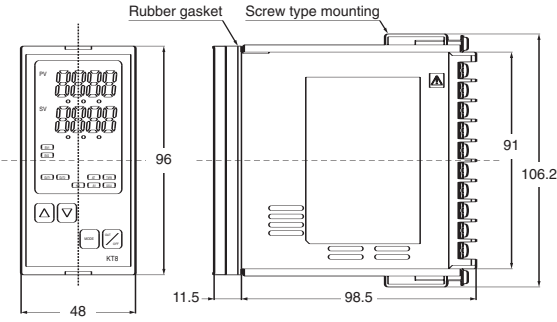


### • Panel cutout

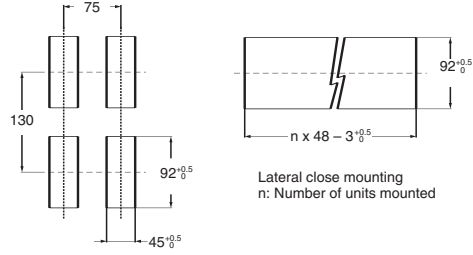


Note) The communications terminal is the screw terminal on the back of the unit.

### KT9 Series (unit: mm)

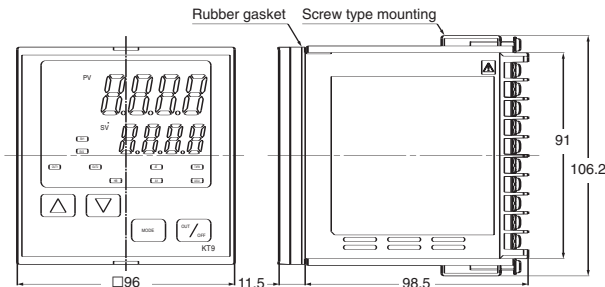


### • Panel cutout

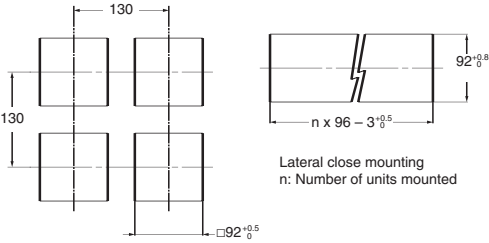

Note) The communications terminal is the screw terminal on the back of the unit.


### KT7 Series (unit: mm)

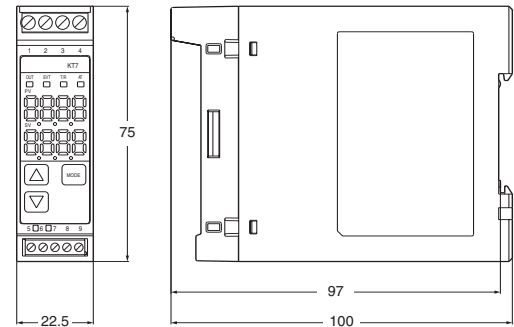

Note) The communications terminal is the modular jack on the bottom of the unit.

### DIN rail mounting

Recommended DIN rail: Part No. AT8DLA1  
Recommended fastening plate: Part No. ATA4806

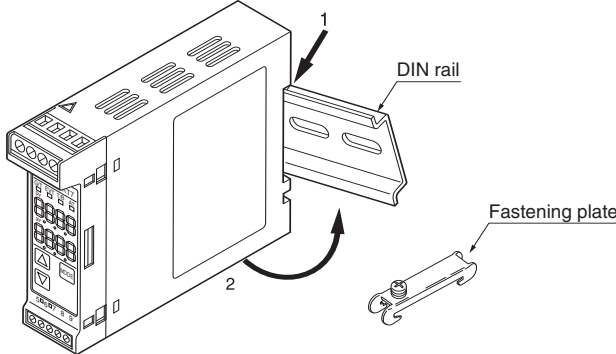


Note) The communications terminal is the modular jack on the bottom of the unit.


# KT Series

## Accessories

**Shunt resistor** for current input (mA)  
**AKT4810** for KT2, KT4, KT4H, KT8, KT9




**AKT4811** for KT7




all units on this page in mm


**Terminal cover** to protect rear side screw terminals from contact  
**AKT4801** for KT4

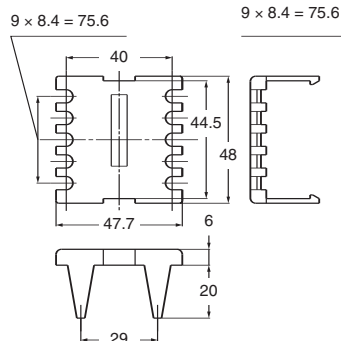


**AKT8801** for KT8  
**AKT9801** for KT9

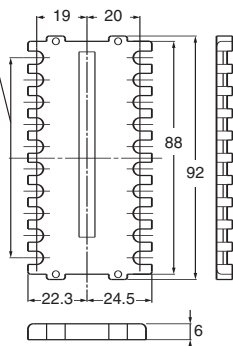

**AKT4H801** for KT4H

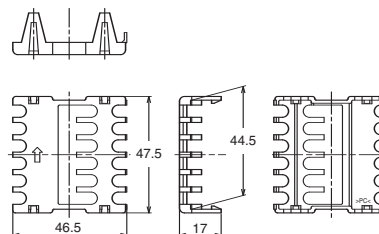


**AKT2801** for KT2

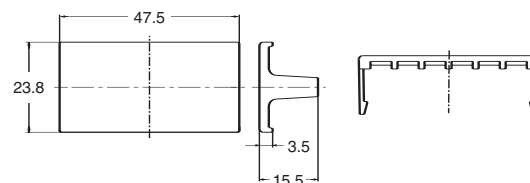


### Current Transformer

CT1 or CT2 for current detection is provided as an accessory for all types with heater burnout alarm function. They are enclosed for these types and need not be ordered separately.


**CT1** (for 20A)

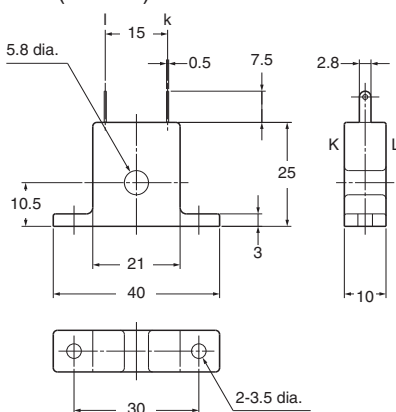

**CT2** (for 50A)

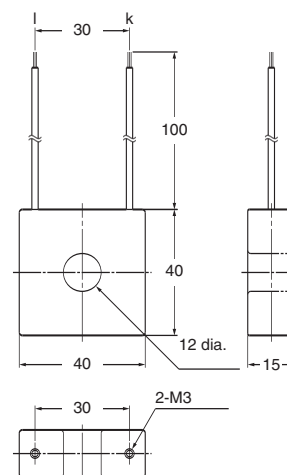

**Tool cable** to connect the KT4H's tool port to a PC's USB port.  
**AKT4H820**

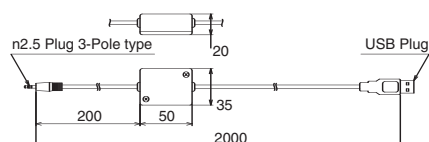



## Global Network Services

North America

Europe

Asia Pacific

China

Japan

### Panasonic Electric Works

Please contact our Global Sales Companies in:

#### Europe

|                           |  |  |
|---------------------------|--|--|
| ▶ <b>Headquarters</b>     | <b>Panasonic Electric Works Europe AG</b>  | Rudolf-Diesel-Ring 2, 83607 Holzkirchen, Tel. (08024) 648-0, Fax (08024) 648-111, <a href="http://www.panasonic-electric-works.com">www.panasonic-electric-works.com</a>   |
| ▶ <b>Austria</b>          | <b>Panasonic Electric Works Austria GmbH</b><br><b>PEW Electronic Materials Europe GmbH</b>                            | Josef Madersperger Str. 2, 2362 Biedermansdorf, Tel. (02236) 26846, Fax (02236) 46133, <a href="http://www.panasonic-electric-works.at">www.panasonic-electric-works.at</a><br>Ennsstafelstraße 30, 4470 Enns, Tel. (07223) 883, Fax (07223) 88333, <a href="http://www.panasonic-electronic-materials.com">www.panasonic-electronic-materials.com</a>                           |
| ▶ <b>Benelux</b>          | <b>Panasonic Electric Works</b><br><b>Sales Western Europe B.V.</b>  | De Rijn 4, (Postbus 211), 5684 PJ Best, (5680 AE Best), Netherlands, Tel. (0499) 372727, Fax (0499) 372185, <a href="http://www.panasonic-electric-works.nl">www.panasonic-electric-works.nl</a>   |
| ▶ <b>Czech Republic</b>   | <b>Panasonic Electric Works Czech s.r.o.</b>   | Prumyslová 1, 34815 Planá, Tel. 374 799 990, Fax 374 799 999, <a href="http://www.panasonic-electric-works.cz">www.panasonic-electric-works.cz</a>   |
| ▶ <b>France</b>           | <b>Panasonic Electric Works</b><br><b>Sales Western Europe B.V.</b><br><b>PEW Electronic Materials France S.A.R.L.</b> | French Branch Office, B.P. 44, 91371 Verrières le Buisson CEDEX, Tél. 01 60135757, Fax 01 60135758, <a href="http://www.panasonic-electric-works.fr">www.panasonic-electric-works.fr</a><br>26 Allée du Clos des Charmes, 77090 Collegien, Tél. 01 64622919, Fax 01 64622809, <a href="http://www.panasonic-electronic-materials.com">www.panasonic-electronic-materials.com</a> |
| ▶ <b>Germany</b>          | <b>Panasonic Electric Works Deutschland GmbH</b>   | Rudolf-Diesel-Ring 2, 83607 Holzkirchen, Tel. (08024) 648-0, Fax (08024) 648-555, <a href="http://www.panasonic-electric-works.de">www.panasonic-electric-works.de</a>   |
| ▶ <b>Ireland</b>          | <b>Panasonic Electric Works UK Ltd.</b>  | Dublin, Tel. (01) 4600969, Fax (01) 4601131, <a href="http://www.panasonic-electric-works.co.uk">www.panasonic-electric-works.co.uk</a>  |
| ▶ <b>Italy</b>            | <b>Panasonic Electric Works Italia s.r.l.</b><br><b>PEW Building Materials Europe s.r.l.</b>                           | Via del Commercio 3-5 (Z.I. Ferlina), 37012 Bussolengo (VR), Tel. (045) 6752711, Fax (045) 6700444, <a href="http://www.panasonic-electric-works.it">www.panasonic-electric-works.it</a><br>Viale Elvezia 18, 20154 Milano (MI), Tel. (02) 33604525, Fax (02) 33605053, <a href="http://www.panasonic-building-materials.com">www.panasonic-building-materials.com</a>           |
| ▶ <b>Nordic Countries</b> | <b>Panasonic Electric Works Nordic AB</b><br><b>PEW Fire &amp; Security Technology Europe AB</b>                       | Sjöängsvägen 10, 19272 Sollentuna, Sweden, Tel. (08) 59476680, Fax (08) 59476690, <a href="http://www.panasonic-electric-works.se">www.panasonic-electric-works.se</a><br>Citadellsvägen 23, 21118 Malmö, Tel. (040) 6977000, Fax (040) 6977099, <a href="http://www.panasonic-fire-security.com">www.panasonic-fire-security.com</a>  |
| ▶ <b>Portugal</b>         | <b>Panasonic Electric Works España S.A.</b>  | Portuguese Branch Office, Avda Adelino Amaro da Costa 728 R/C J, 2750-277 Cascais, Tel. (21) 4812520, Fax (21) 4812529   |
| ▶ <b>Spain</b>            | <b>Panasonic Electric Works España S.A.</b>  | Barajas Park, San Severo 20, 28042 Madrid, Tel. (91) 3293875, Fax (91) 3292976, <a href="http://www.panasonic-electric-works.es">www.panasonic-electric-works.es</a>   |
| ▶ <b>Switzerland</b>      | <b>Panasonic Electric Works Schweiz AG</b>   | Grundstrasse 8, 6343 Rotkreuz, Tel. (041) 7997050, Fax (041) 7997055, <a href="http://www.panasonic-electric-works.ch">www.panasonic-electric-works.ch</a>   |
| ▶ <b>United Kingdom</b>   | <b>Panasonic Electric Works UK Ltd.</b>  | Sunrise Parkway, Linford Wood, Milton Keynes, MK14 6LF, Tel. (01908) 231555, Fax (01908) 231599, <a href="http://www.panasonic-electric-works.co.uk">www.panasonic-electric-works.co.uk</a>  |

#### North & South America

|              |   |   |
|--------------|---|---|
| ▶ <b>USA</b> | <b>PEW Corporation of America</b><br><b>Head Office USA</b> | 629 Central Avenue, New Providence, N.J. 07974, Tel. 1-908-464-3550, Fax 1-908-464-8513, <a href="http://www.pewa.panasonic.com">www.pewa.panasonic.com</a> |
|--------------|---|---|

#### Asia Pacific / China / Japan

|                    |   |   |
|--------------------|---|---|
| ▶ <b>China</b>     | <b>Panasonic Electric Works (China) Co., Ltd.</b>               | 2013, Beijing Fortune, Building No. 5, Dong San Huan Bei Lu, Chaoyang District, Beijing, Tel. (010) 6590-8646, Fax (010) 6590-8647                      |
| ▶ <b>Hong Kong</b> | <b>Panasonic Electric Works</b><br><b>(Hong Kong) Co., Ltd.</b> | Rm1601, 16/F, Tower 2, The Gateway, 25 Canton Road, Tsimshatsui, Kowloon, Hong Kong, Tel. (0852) 2956-3118, Fax (0852) 2956-0398                        |
| ▶ <b>Japan</b>     | <b>Matsushita Electric Works, Ltd.</b>                          | 1048 Kadoma, Kadoma-shi, Osaka 571-8686, Japan, Tel. (06) 6908-1050, Fax (06) 6908-5781, <a href="http://www.mew.co.jp/e-acg/">www.mew.co.jp/e-acg/</a> |
| ▶ <b>Singapore</b> | <b>Panasonic Electric Works Asia Pacific Pte. Ltd.</b>          | 101 Thomson Road, #25-03/05, United Square, Singapore 307591, Tel. (06255) 5473, Fax (06253) 5689   |

**Panasonic**<sup>®</sup>