

## Features :

- Universal AC input with active PFC
- Programmable output Voltage ( 30% ~ 100% )
- Programmable output Current ( 40% ~ 105% )
- High efficiency up to 91%
- +5V / 0.5A auxiliary output
- Intelligent LED indicators
- 1U profile, High power density
- Forced current sharing at parallel operation
- Power OK signal ( Power good, Logic low)
- Remote ON-OFF, Remote sense function
- Protections : OVP, OLP, OTP, SCP, Fan failure


1 year warranty



Model		AK-650-05	AK-650-12	AK-650-15	AK-650-24	AK-650-27	AK-650-48
Output	DC Voltage Range	5V	12V	15V	24V	27V	48V
	Rated Current	100A	50A	40A	27A	24A	13.6A
	Current Range	0 ~ 100A	0 ~ 50A	0 ~ 40A	0 ~ 27A	0 ~ 24A	0 ~ 13.6A
	Rated Power	500W	600W	600W	648W	648W	652W
	Ripple & Noise (Max.)	Note.2 150mVp-p	150mVp-p	150mVp-p	150mVp-p	150mVp-p	150mVp-p
	Voltage Adj. Range	±5.0% Typical adjustment by potentiometer					
	Voltage Tolerance	Note.3 ±1.0%					
	Line Regulation	±0.5%					
	Load Regulation	±0.5%					
	Setup, Rise Time	800ms, 50ms at full load					
Hold Up Time (Typ.)	16ms / 230VAC at full load						
Input	Voltage Range	Note.4 90 ~ 264VAC	127 ~ 370VDC				
	Frequency Range	47 ~ 63Hz					
	Power Factor (Typ.)	0.98 / 230VAC, 0.99 / 115VAC at full load					
	Efficiency (Typ.)	83%	88%	88%	90%	90%	91%
	AC Current (Typ.)	7.5A / 115VAC	3.5A / 230VAC				
	Inrush Current (Typ.)	27A / 115VAC		54A / 230VAC			
Leakage Current	<1.0mA / 240VAC						
Protection	Over Load	105 ~ 125% rated output power Protection type : Total Power limiting, Latch-style ( Recovery after reset AC power ON or inhibit )					
	Over Voltage	5.75 ~ 6.25V	13.8 ~ 15.0V	17 ~ 19.0V	27.6 ~ 30.0V	31 ~ 33.75V	55.2 ~ 60.0V
	Over Temperature	By detecting primary and secondary heat sink. Protection type: Shut down o/p voltage ( Auto recovers automatically after temperature goes down )					
Function	Auxiliary Power	5V @ 0.5A ( +/- 3% )					
	Remote ON/OFF Control	External switch or NPN Transistor to turn ON / OFF					
	Power OK Signal	Open drain signal low when PSU turns on, Max. sink current: 20mA, Max. drain voltage: 40V.					
	Output Voltage Trim	Adjustment of output voltage is between 30 ~ 105% of rated output					
	Output Current Trim	Adjustment of output current is between 20 ~ 105% of rated output					
Parallel (Current Sharing)	Note.5	Please refer to function					
Environment	Working Temp.	-25 ~ +60 °C ( Refer to output load de-rating curve )					
	Working Humidity	20 ~ 90% R.H non-condensing					
	Storage Temp., Humidity	-40 ~ +85 °C, 10 ~ 95% R.H					
	Temp. Coefficient	± 0.02%/ °C ( 0 ~ 50 °C )					
	Vibration	Compliance to IEC 68-2-6, IEC 68-2-64					
Safety & EMC	Safety Standards	UL 60950-1, 2nd Edition, CSA C22.2 NO.60950 -1 -07, 2nd Edition, TUV EN60950-1 :2006 Approved					
	Withstand Voltage	I/P-O/P: 3KVAC I/P-FG: 1.5KVAC O/P-FG: 0.5KVAC					
	Isolation Resistance	I/P-O/P, I/P-FG, O/P-FG: 100MΩ / 500VDC					
	EMI Conduction & Radiation	EN55022 : 1998+A1 : 2000+A2 : 2003 Class B					
	Harmonic Current	EN61000-3-2 :2000+A2:2005 Class A, EN61000-3-3 : 1995+A1 :2001					
EMS Immunity	EN61000-4-2,3,4,5,6,8,11 ; EN 50204 1998+A1 : 2001+A2 : 2003						
Other	Cooling	Controlled by power rating & temperature ( Internal ball bearing fan )					
	Dimension (L*W*H)	249*127*41 mm / 9.80*5.00*1.61 inch					
	Packing	1.75 kg ; 8pcs / 15.0kg / 0.75 CUFT					
Note	<ol style="list-style-type: none"> <li>All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25 °C of ambient temperature.</li> <li>Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</li> <li>Tolerance: includes set up tolerance, line regulation and load regulation.</li> <li>De-rating may be needed under low input voltages. Please check the de-rating curve for more details.</li> <li>In parallel connection, maybe only one unit operate if the total output load is less than 5% of rated load condition.</li> <li>The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.</li> </ol>						

## Mechanical Specification

Unit : mm / inch

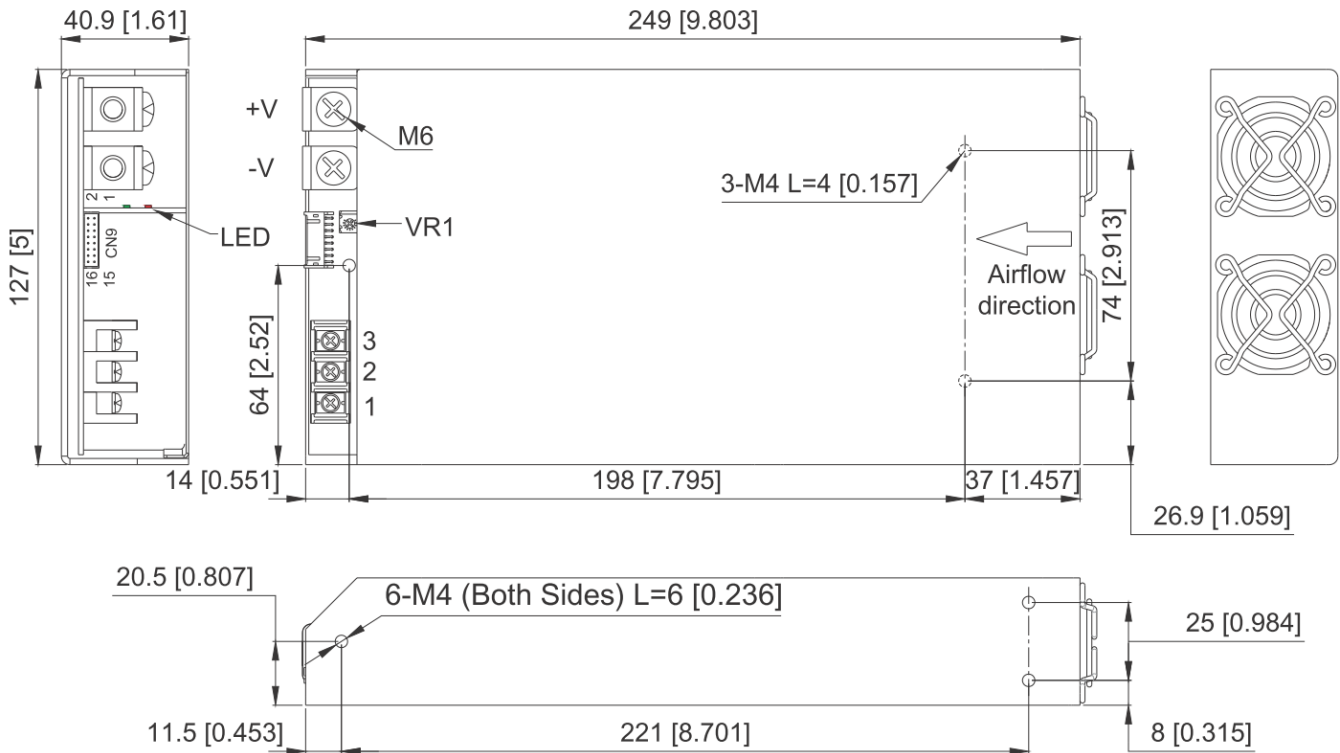

AC Input Terminal  
Pin No. Assignment

Pin No.	Assignment
1	ACL
2	ACN
3	⊥

Control pin number assignment (CN9) : JST S16B-PHDSS or equivalent

Pin No.	Assignment	Pin No.	Assignment	Pin No.	Assignment	Pin No.	Assignment	Mating Housing	Terminal
1	VS+	5	AUX	9	EN-	13	VCI	PHDR-16VS	SPHD-002T-P05
2	VO+	6	AUX	10	GND	14	GND		
3	VS-	7	EN+	11	P.OK	15	PAR		
4	VO-	8	GND	12	GND	16	ACI		



## Function Description of CN9

Pin No.	Function	Description
1	VS+	Remote voltage sense (+)
2	VO+	Local output voltage sense (+)
3	VS-	Remote voltage sense (-)
4	VO-	Local output voltage sense (-)
5,6	AUX	+5V / 0.5A Auxiliary power
7	EN+	Remote ON/OFF (+)
8,10,12,14	GND	Ground
9	EN-	Remote ON/OFF (-)
11	P.OK	Power OK
13	VCI	V Program
15	PAR	Parallel operation current share
16	ACI	I Program

## LED Status





Green LED	LED Signal	Status
Solid		Power OK
Slow Blink		Power Standby
Red LED	LED Signal	Status
Fast Blink		Over Voltage Protection ( OVP )
Solid		Over Load Protection ( OLP )
		Output Shorted Circuit Protection ( SCP )
		Under Voltage Protection ( UVP )
Slow Blink		Over Temperature Protection ( OTP )
Intermittent Blink		Fan Failure
Interlace Blink		Power Failure

## De-rating Curve



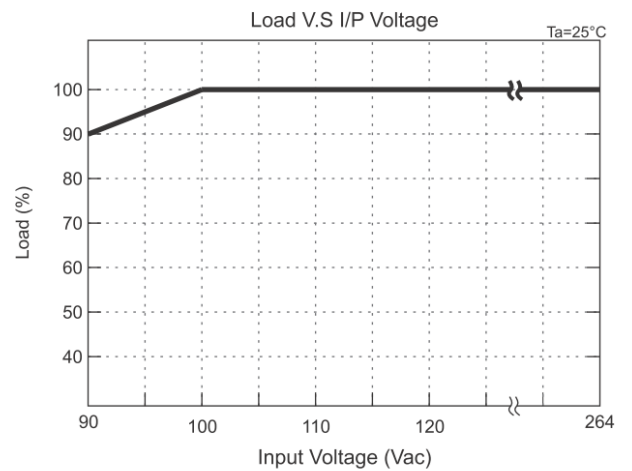
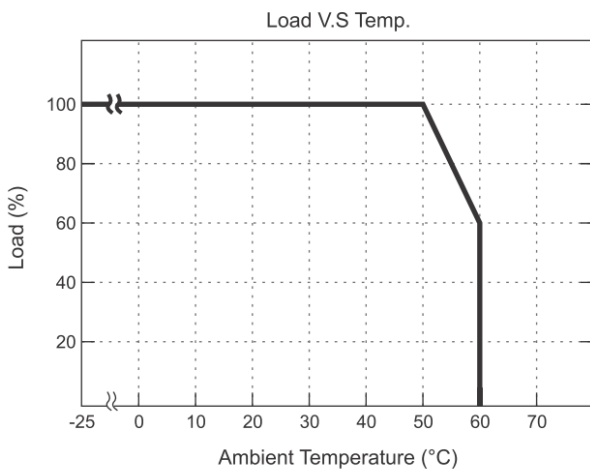


## Function Manual


### 1. Output Voltage Trim

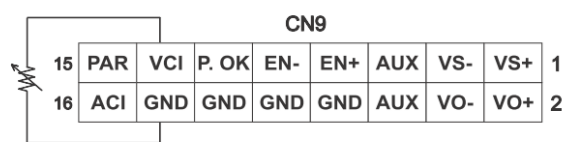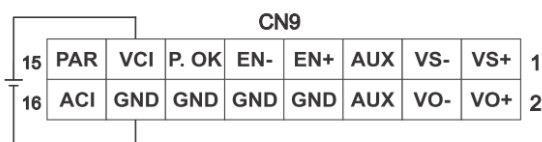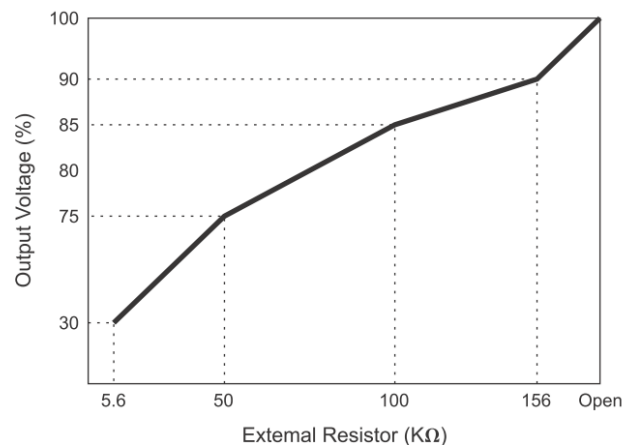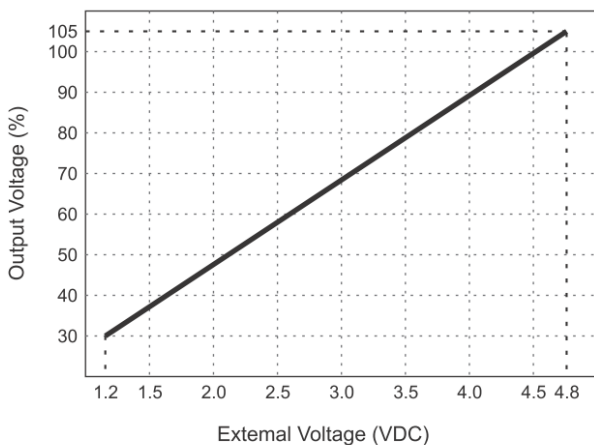


## 2. Output Current Trim (For Reference Only)

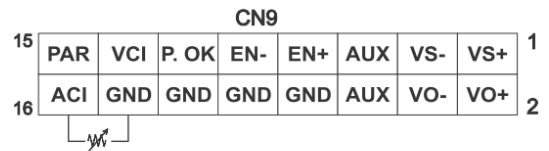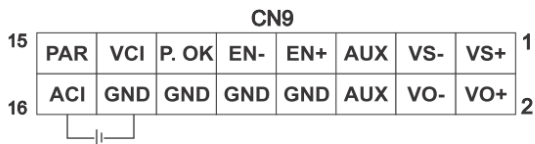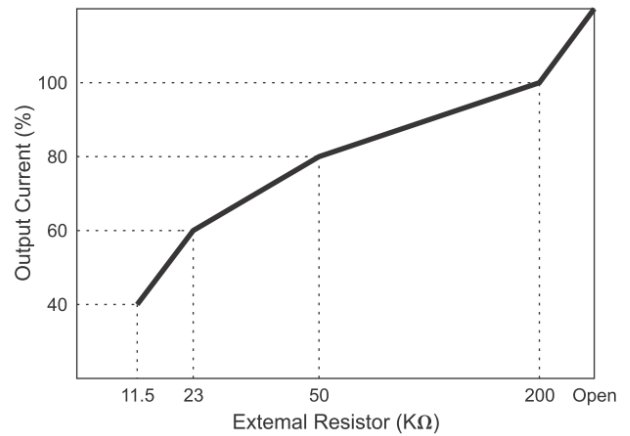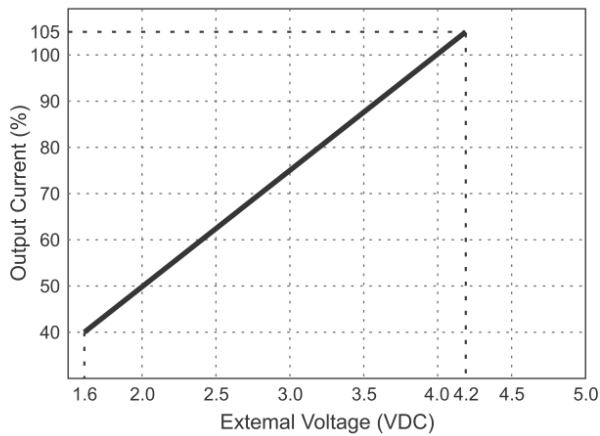

## 3. Remote ON/OFF

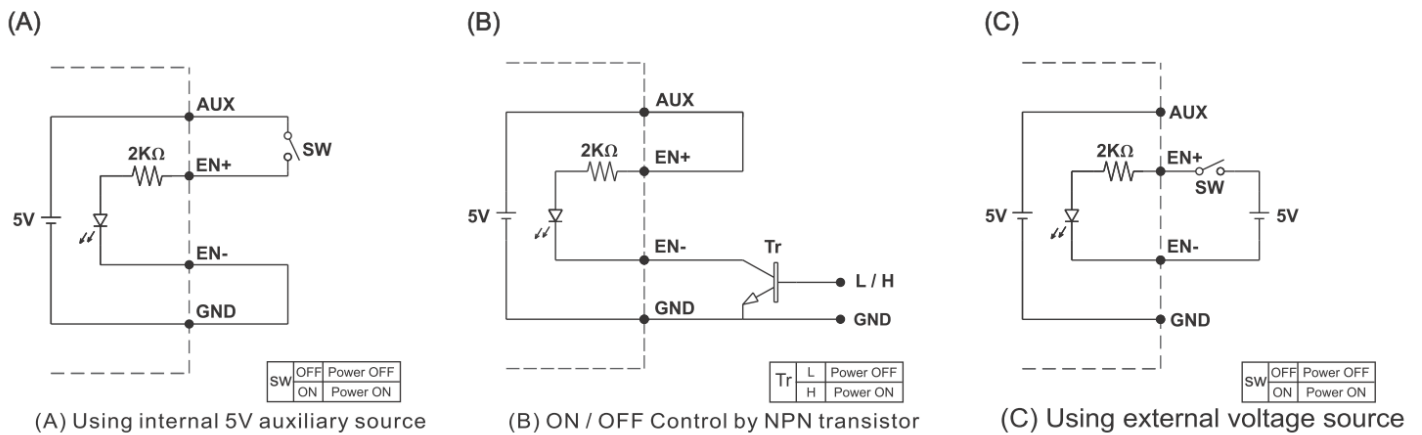


## 4. Power OK Signal

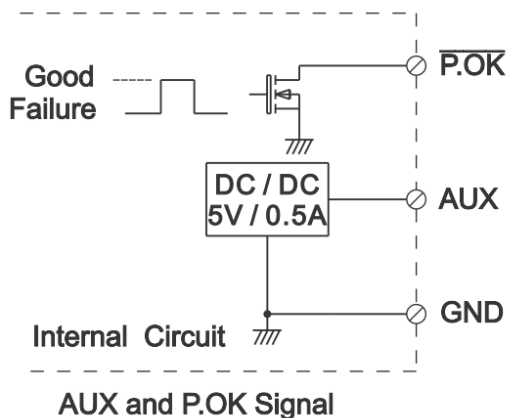


\*Place an additional capacitor to have a better performance of auxiliary power operation.


\*The grounding of "AUX" power should be connected to "GND" port. If "V-" is connected as Grounding, make sure to short the GND and V- ports.




### 5. Remote Sense

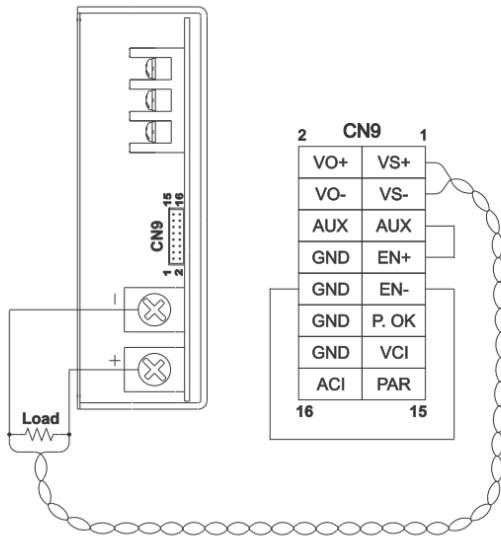


### 6. Local Sense

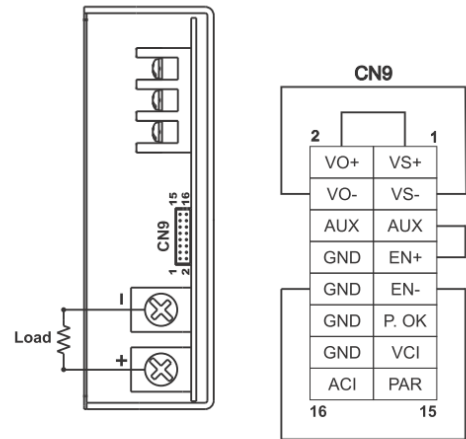

### 7. Current Sharing with Remote Sensing

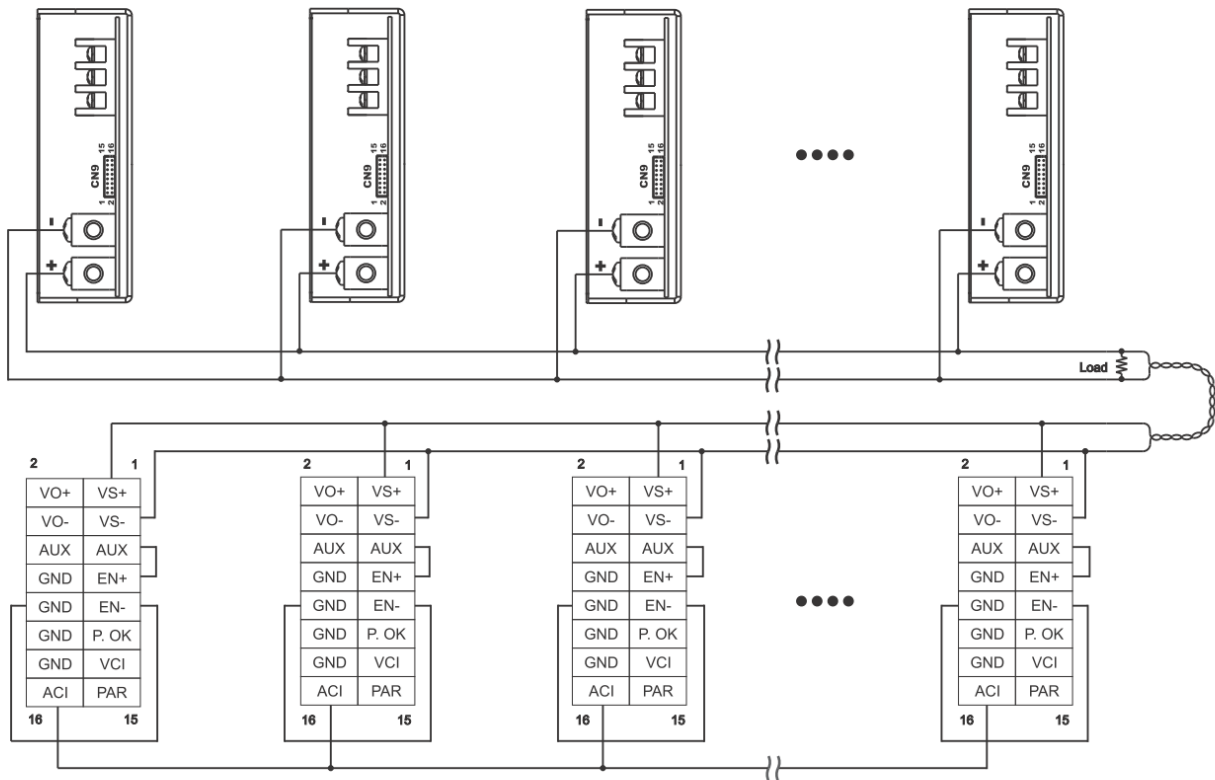


### 8. Current Sharing with Local Sensing

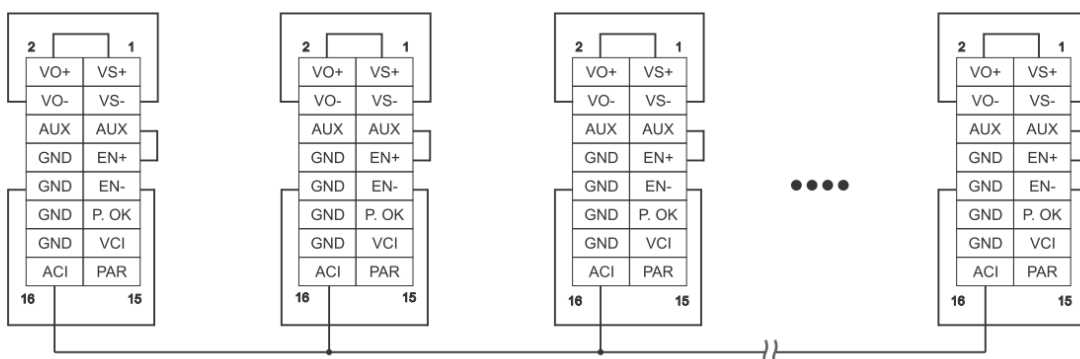

## ■ Installation Instruction

### 1. Mounting Directions

1-1 Recommended standard mounting methods:

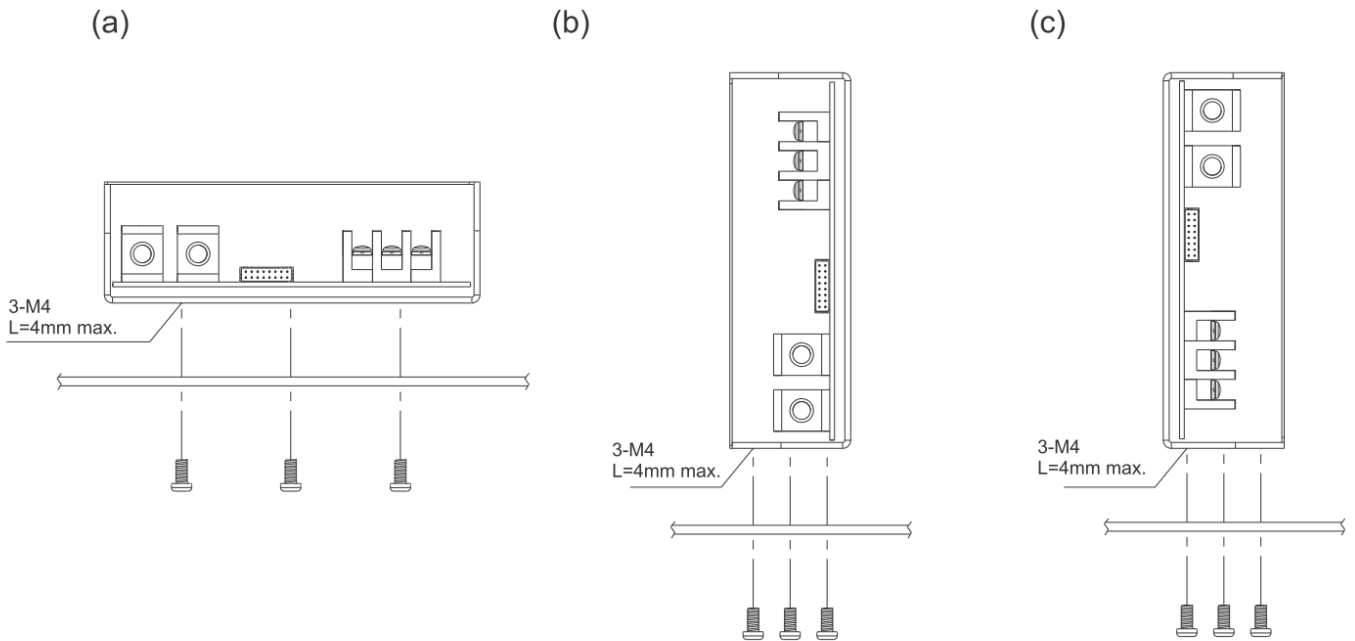

### 2. Mounting Method

2-1 There are ventilating holes on the front and back side panels, do not obstruct; allow 50mm at least for air flow.

2-2 The Maximum allowable penetration of screw is 4mm. Incomplete threading should not be penetrated.

2-3 Recommended the torque of mounting screw:  
M4 screw: 1.27N • m (13.0kgf • cm)

