



Module for emergency stop and gate monitoring with delayed contacts at the opening of the input channels

Main functions

- Single or dual channel input circuit
- Choice between automatic start, manual start or monitored start
- Connection of the input channels to opposite potentials
- 45 mm housing
- 2 NO safety instantaneous contacts, 1 NC auxiliary instantaneous contact, 2 NO safety delayed contacts.
- Supply voltages: 24 VAC/DC, 120 VAC, 230 VAC

Utilization categories

Alternate current: AC15 (50...60 Hz)

Ue (V) 230

Ie (A) 3

Direct current: DC13 (6 operations/minute)

Ue (V) 24

Ie (A) 6

Markings, quality marks and certificates:



Approval UL: E131787

Complying with the requirements requested by:

Low Voltage Directive 2006/95/EC,

Machinery Directive 2006/42/EC,

Electromagnetic Compatibility 2004/108/EC

Technical data

Housing

Made of polyamide PA 6.6 self-extinguishing, class V0 (UL94)

Protection degree: IP40 (housing), IP20 (terminals)

Dimensions: see page 4/142, shape C

General data

Safety category according to EN 954-1: category 4 (instantaneous contacts)
category 3 (delayed contacts)

Ambient temperature: -25°C...+55°C

Mechanical endurance: >10 millions of operations

Electrical endurance: >100.000 operations

Pollution degree: outside 3, inside 2

Rated impulse with stand voltage (Uimp): 4 kV

Rated insulation voltage (Ui): 250 V

Over-voltage category: III

Weight: 0,45 Kg

Power supply

Rated operating voltage (Un): 24 VAC/DC; 50...60 Hz

120 VAC; 50...60 Hz

230 VAC; 50...60 Hz

10%

Max residual ripple in DC:

Supply voltage tolerance: ±15% of Un

Rated power consumption AC: < 10 VA

Rated power consumption DC: < 5 W

Control circuit

Protection against short circuits: resistance PTC, I_h=0,5 A

Operating time of PTC: intervention > 100 ms, reset > 3 s

Max input resistance: ≤ 50 Ω

Current for each input: 30 mA

Min. period of start impulse t_{MIN}: 100 ms

Operating time t_A: 50 ms

Releasing time t_{R1}: 20 ms

Releasing time in absence of power supply t_R: 70 ms

Releasing time delayed contacts t_{R2}: see "Code structure"

Simultaneity time t_C: infinite

In conformity with standards:

IEC 60947-1, EN 60947-1, IEC 60204-1, EN 60204-1, EN ISO 13849-1, EN 999, EN 1037, EN ISO 12100-1, EN ISO 12100-2, EN ISO 13850, IEC 529, EN 60529, EN 61000-6-2, EN 61000-6-3, EN 62326-1, EN 60664-1, UL 508, CSA C22.2 n° 14-95

Output circuit

Output contacts: 2 NO safety instantaneous contacts,

1 NC auxiliary instantaneous contact,

2 NO safety delayed contacts.

Contacts type: forced guided contacts

Contacts material: silver alloy, gold plated

Max switching voltage: 230/240 VAC; 300 VDC

Max switching current per contact: 6 A

Conventional free air thermal current I_{th}: 6 A

Contacts resistance: ≤ 100 mΩ

Contact protection fuse: 6 A

The number and the load capacity of output contacts can

be increased by using expansion modules or contactors: see page 4/135 - 4/139

Code structure

CS AT-00V024-TF1

Releasing time delayed contacts (t _{R2})	Releasing time delayed contacts (t _{R2})
0 Fixed time (see TF)	TF0.5 fixed 0,5 s
1 from 0,3 to 3 s, step 0,3 s	TF1 fixed 1 s
2 from 1 to 10 s, step 1 s	TF3 fixed 3 s
3 from 3 to 30 s, step 3 s	...
4 from 30 to 300 s, step 30 s	

Kind of connection	Supply voltage
V screw terminals	024 24 VAC/DC ±15%
M connector with screw terminals	120 120 VAC ±15%
X connector with spring terminals	230 230 VAC ±15%

Data type approved by UL

Rated operating voltage (Un): 24 VAC/DC; 50...60 Hz

120 VAC; 50...60 Hz

230 VAC; 50...60 Hz

Rated power consumption AC: < 10 VA

Rated power consumption DC: < 5 W

Max switching voltage: 230 VAC

Max switching current per contact: 6 A

Utilization category: C300

Notes:

- Use 60° or 75 °C copper (Cu) conductor and wire size No. 30-12 AWG.

- Terminal tightening torque of 5-7 Lb-In.


- Only for 24 VAC/DC version, supply from remote class 2 source or limited voltage

and limited energy.


- Surrounding air of 55 °C.

Safety module CS AT-0

Terminals layout

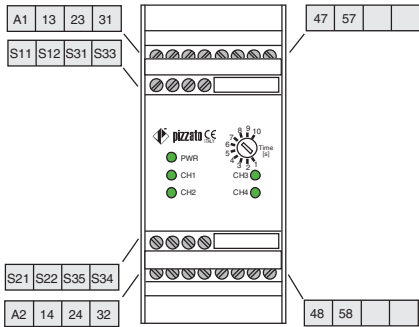


Internal wiring diagram

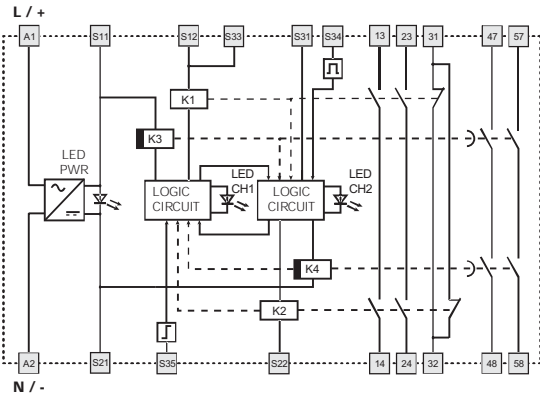


Operation diagrams


Configuration with automatic start

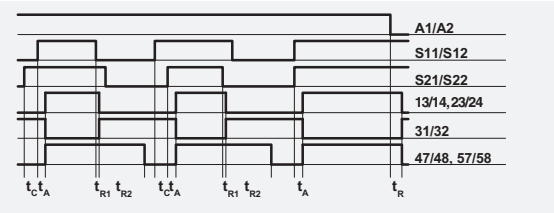

Configuration with monitored start

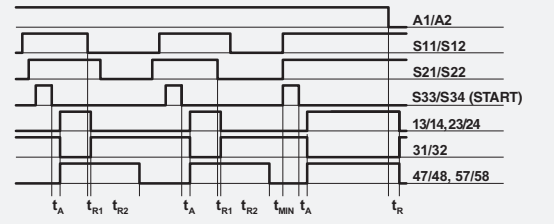


Configuration with manual start

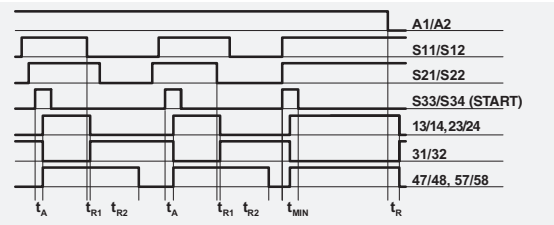

- Legend:
- t_{MIN} : Min. period of start impulse
 - t_c : Simultaneity time
 - t_A : Operating time
 - t_{R1} : Releasing time
 - t_{R2} : Releasing time in absence of power supply
 - t_{R2} : Adjustable releasing time delayed contacts (see "Code structure")


Note:
The configurations with one channel are obtained taking into consideration only the S11/S12 input. In this case it is necessary to consider the t_{R1} and t_{R2} time referred to S11/S12 input, the t_A time referred to the supply, the t_c time referred to S11/S12 input and to the start, and the t_{MIN} time referred to the start.

Inputs configuration

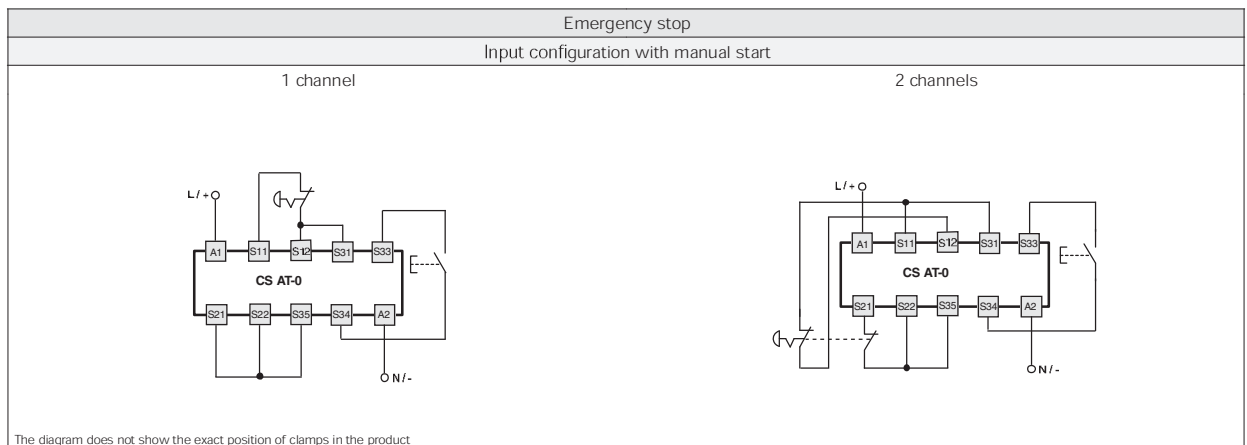


Automatic start

As regards the indicated diagrams, in order to activate the module with the automatic start, it is necessary to short the start button between S33 and S34 terminals.



Monitored start

As regards the indicated diagrams, in order to activate the module with the monitored start, it is necessary to remove the connection between S22 and S35 terminals.



Gate monitoring

The safety module can control both emergency stop circuits and gate monitoring circuits, replacing the emergency stop contacts with switches contacts.

