

## DT Series Technical Manual



## Table of Contents

|                             |      |                                      |        |
|-----------------------------|------|--------------------------------------|--------|
| Introduction                | 2, 3 | Contact Retention System             | 10     |
| Features & Benefits         | 3    | Assembly Contact Insertion / Removal | 11     |
| Product Line Overview       | 4    | Accessories                          | 12     |
| Material Specifications     | 5    | Shrink Boot Adaptor                  | 12     |
| General Specifications      | 5    | Removal Tools / Sealing Plugs        | 12     |
| Ordering Information        | 6    | DT Mounting Clips                    | 13     |
| Insert Arrangements         | 7, 8 | Back Shells                          | 14, 15 |
| Contacts & Application Data | 9    |                                      |        |

## Environmentally-Sealed Transportation Connectors



### Deutsch DTM Series

Deutsch DTM Series of transportation connectors feature a miniature contact with an enhanced design based on the world class, field-proven Deutsch DT Series.

The DTM is the connector to be used in harsh environmental application where reliable signal circuits are critical to operating performance. Typical applications include on or around the engine, the transmission and under the hood.

### Deutsch DT Series

An environmentally-sealed connector designed specifically for cable to cable applications on the engine or transmission, under the hood, on the chassis or in the cab. On signal level circuits in harsh environmental conditions, where even a small degradation in connection may be critical, the Deutsch DT Series general purpose connectors will provide the reliability and performance at the lowest cost.





# DT Series Technical Manual



## Deutscher DTP Series

Deutscher's DTP Series connectors are the answer to all of your most demanding power application requirements. DTP Series connectors offer the proven reliability and quality of Deutscher's DT Series, combined with the added flexibility of using power contacts.



## Deutscher DT Bussed Series

Utilizing the Deutscher DT receptacle shell, Deutscher has combined the rugged characteristics of the DT product line with a bussing device allowing the elimination of various harness splices. By using internal stamped bussed contacts this product can be configured in whatever arrangement meets your individual needs in the DT shell size that matches your requirements. Complete bussing flexibility in a compact, economical package.



## Deutscher DTHD Series

Deutscher developed the DTHD Series for those applications requiring a complete, environmentally sealed, single power circuit termination. The plug features an integral coupling latch that provides tactile and audible feedback during coupling. The rugged thermoplastic receptacle is designed as an inline for cable to cable applications and is supplied with an integral Vee-Groove to accept mounting, clips, brackets and flanges.

| Features                                                                           | Benefits                                                             |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------|
| Integral Connector Latch                                                           | Tactile and Audible Assembly Feedback                                |
| Rugged Thermoplastic Housing                                                       | Field Proven Long Service Life                                       |
| -55° C to +125° C Operating Temperature                                            | Engine Compartment Rated                                             |
| Available Configurations:                                                          |                                                                      |
| DTM/DT 2, 3, 4, 6, 8 & 12 - Size 20/16                                             | Meets Most Harness Design Requirements                               |
| DTP 2 & 4 - Size 12                                                                |                                                                      |
| DTHD 1 - Size 4, 8 & 12                                                            |                                                                      |
| Silicone Seals:                                                                    | Superior Environmental Seal                                          |
| DTM: Accepts AWG 22 - 16 wire                                                      | Seals on .053" to .120 dia.(1.35mm to 3.05mm)                        |
| DT: Accepts AWG 20 - 14 wire                                                       | Seals on .053" to .145 dia.(1.35mm to 3.68 mm)                       |
| DTP: Accepts AWG 14 - 10 wire                                                      | Seals on .097" to .170 dia.(2.46mm to 4.32mm)                        |
| DTHD: Accepts AWG 14 - 6 wire                                                      | Seals on .134 to .292 dia.(3.40mm to 7.42mm)                         |
| Crimp Contacts with Option of Gold or Nickel Finish, Solid or Stamped Construction | Low Costs, High Reliability Terminals for Data & Signal Transmission |
| Current rating all contacts @ 125° C no derating                                   |                                                                      |
| DTM - 7.5 Amps                                                                     | Meets Most Signal Requirements                                       |
| DT - 13 Amps                                                                       |                                                                      |
| DTP - 25 Amps                                                                      |                                                                      |
| DTHD - 25 to 100 Amps                                                              |                                                                      |
| Fail-Safe Secondary Locks All (Except DTHD)                                        | Positive Contact Retention                                           |
| Hand Insertable/Removable Contacts                                                 | No Special Tools Required (Except DTHD)                              |
| Budget Minded                                                                      | Low Installation Costs                                               |





## Product Line Overview

### Deutsch DTM Series

Deutsch DTM Series of transportation connectors feature a miniature contact with an enhanced design based on the world class, field-proven Deutsch "DT Series".

The DTM is the connector to be used in harsh environmental applications where reliable signal circuits are critical to operating performance. Typical applications include on or around the engine, the transmission and under the hood. In fact, everywhere data signals or critical electronic circuits go, the field proven Deutsch design of the DTM will provide reliable peak connector performance.

The low cost, size 20 contacts terminate AWG 16 to 22 gauge wire (0.5mm<sup>2</sup> to 1.5mm<sup>2</sup>). Closed entry socket (female) contacts featuring spring action fingers are protected by a stainless steel hood. This allows for positive axial alignment while mating and prevents probe damage during testing.

Thermoplastic housings offer a wide operating temperature range (-55° C to +125° C). Silicone rear wire and internal peripheral interface seals allow the DTM to withstand moisture and fluids.

### Deutsch DT Series

Deutsch DT Series of environmentally-sealed, connectors are designed specifically for cable to cable applications on the engine or transmission, under the hood, on the chassis or in the cab. Where signal level circuits in harsh environmental conditions, where even a small degradation in connection may be critical, the Deutsch DT Series general purpose connectors will provide the reliability and performance at the lowest cost.

Thermoplastic (-55° C to + 125° C rated) housings and silicone seals are used to allow the connector to withstand conditions of extreme temperature and moisture. The connector may be employed with either solid-copper crimp type contacts for critical circuits or budget-minded stamped and formed contacts. In either selection, the spring action is designed in the socket and shrouded by a stainless steel hood that provides closed entry for positive axial alignment during mating, and eliminates probe damage from occurring. Contact insertion and withdrawal require no special tools and are retained in locked position by dielectric fingers, molded as an integral part of the housing. Secondary locks are assembled at the mating interfaces. If by chance the secondary locks are not properly seated during assembly, they will be pressed into locked position during the mating of the connector.

### Deutsch DTP Series

Building on both the DT and DTM design strengths, the DTP connector line was developed to fill the need for higher amperage, multi-pin, inexpensive connectors. The series meets the same specifications as the DTM and DT but offers the designer the ability to use multiple 12 gauge contacts, each with a 25 amp continuous capacity, within a single shell.

Based on the DTM overall design, it offers the protected interfacial seal located within the receptacle shell. Standard multi-seal grommet is used in both the plug and receptacle. Currently available in two and four pin configurations.

### Deutsch DT Bussed Series

These standard "DT" receptacle shells feature internal pin type contact buss bar arrangements that allow common connections from 3 to 12 size 16 contacts. Buss bars are available in standard nickel or gold to match common Deutsch Industrial contacts.

Other features include the use of standard "DT" plugs to mate with these environmental receptacles. Plugs with any Deutsch modification are intermatable.

### Deutsch DTHD Series

Deutsch developed the DTHD Series for those applications requiring a complete, environmentally sealed, single power circuit termination. DTHD plugs and receptacles can be permanently assembled with thermoplastic end caps that prevent removal of the silicone wire seal grommets. Designed for diesel engine, electronic fuel injectors, automatic transmissions, ABS brakes and other applications that involve fuel and oil exposure. These end caps provide the additional reliability required for critical wiring circuits.





## MATERIAL SPECIFICATIONS

### Plug/Receptacle

Shell: Thermoplastic  
Wedge: Thermoplastic  
Grommet: Silicone Rubber

### Contacts

Pin: Copper Alloy  
Socket: Copper Alloy  
Finish: Nickel (optional - gold) Plated

### Sealing Plugs

Thermoplastic: (All sizes)

### Thermal Cycle:

No cracking, chipping or leaking after 20 test cycles from -55°C to +125°C.

### Durability:

No electrical or mechanical defects after 100 cycles of engagement and disengagement.

## GENERAL SPECIFICATIONS

### Dielectric Withstanding Voltage

Current leakage less than 2 milliamps at 1500 VAC

### Insulation Resistance:

1000 megohms minimum at 25°C.

### Current Rating (Contact current rating @ 125°C (continuous))

Size 20: 7.5 amps  
Size 16: 13 amps  
Size 12: 25 amps  
Size 8: 60 amps  
Size 4: 100 amps

### Submersion:

Properly wired and mated connection will withstand immersion under three feet of water without loss of electronic qualities or leakage.

### Fluid Resistance:

Connectors show no damage when exposed to most fluids used in industrial applications.

### Vibration:

No unlocking or unmating and exhibits no mechanical or physical damage after sinusoidal vibration levels of 20 G's at 10 to 2000 Hz in each of the three mutually perpendicular planes. No electrical discontinuities longer than 1 microsecond.

### Temperature:

Operative at temperatures from -55°C to +125°C. Continuous at rated current.

### Contact Retention:

Contacts withstand a minimum load of:

20 lbs (89N) for size 20  
25 lbs (111N) for size 16  
30 lbs (133N) for size 12  
35 lbs (156N) for size 8  
35 lbs (156N) for size 4

### CONTACT RESISTANCE

| CONTACT SIZE | WIRE GAUGE AWG(mm²) | Test Current (Amps) | Resistance (mV) Solids | Resistance (mV) Stamped & Formed |
|--------------|---------------------|---------------------|------------------------|----------------------------------|
| 20           | 22 (.35)            | 5.0                 | N/A                    | 100                              |
| 20           | 20 (.50)            | 7.5                 | 60                     | 100                              |
|              | 18 (.80)            | 7.5                 | 60                     | 100                              |
|              | 16 (1.0)            | 7.5                 | 60                     | 100                              |
| 16           | 20 (.50)            | 7.5                 | 60                     | 100                              |
|              | 18 (.80)            | 10                  | 60                     | 100                              |
|              | 16 (1.0)            | 13                  | 60                     | 100                              |
|              | 14 (2.0)            | 13                  | 60                     | 100                              |
| 12           | 14 (2.0)            | 18                  | 60                     | 100                              |
|              | 12 (3.0)            | 25                  | 60                     | 100                              |
| 8            | 8 (8.60)            | 60                  | 60                     | N/A                              |
|              | 10 (5.60)           | 60                  | 60                     | N/A                              |
| 4            | 6 (13.0)            | 100                 | 60                     | N/A                              |


### WIRE SEALING RANGE

| CONTACT SIZE | RECOMMENDED WIRE INSULATION O.D. |                          |
|--------------|----------------------------------|--------------------------|
|              | N-SEAL                           | E-SEAL                   |
| #20          | .053-.120<br>(1.35-3.05)         | N/A                      |
| #16          | .088-.145<br>(2.24-3.68)         | .053-.120<br>(1.35-3.05) |
| #12          | .134-.170<br>(3.40-4.32)         | .097-.158<br>(2.46-4.01) |
| #8           | .190-.240<br>(4.83-6.10)         | N/A                      |
| #4           | .280-.292<br>(7.11-7.42)         | N/A                      |







## PART NUMBERING SYSTEM (DTM)

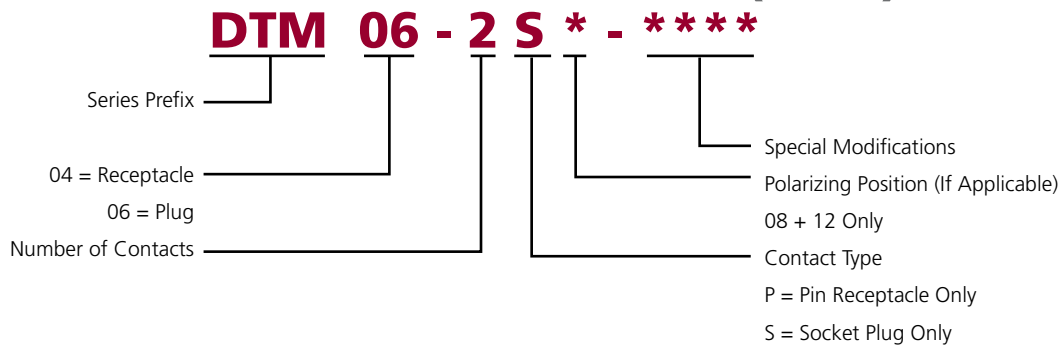


## PART NUMBERING SYSTEM (DT & DT Bussed)

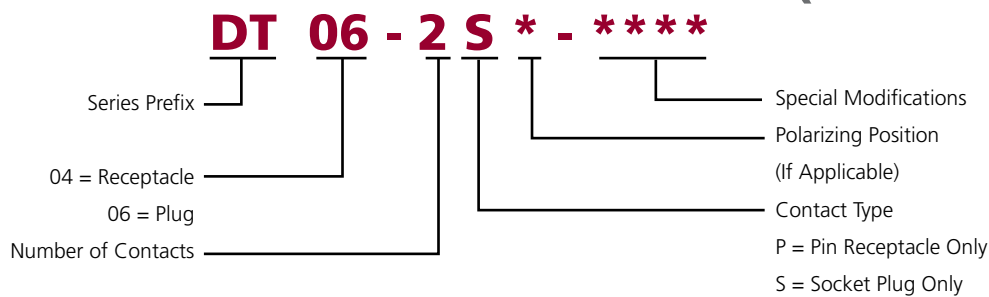

## PART NUMBERING SYSTEM (DTP)

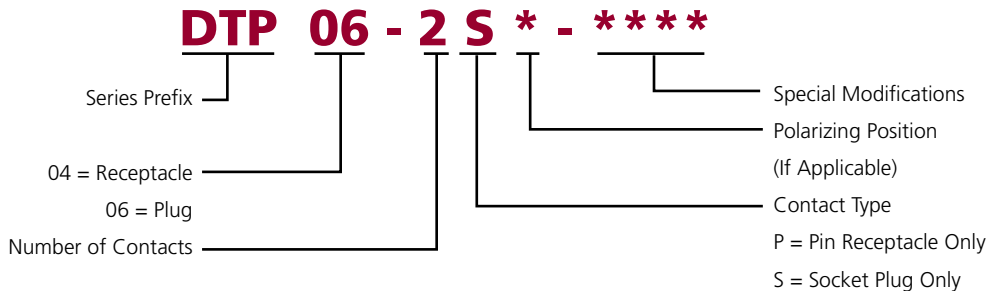


## PART NUMBERING SYSTEM (DTHD)

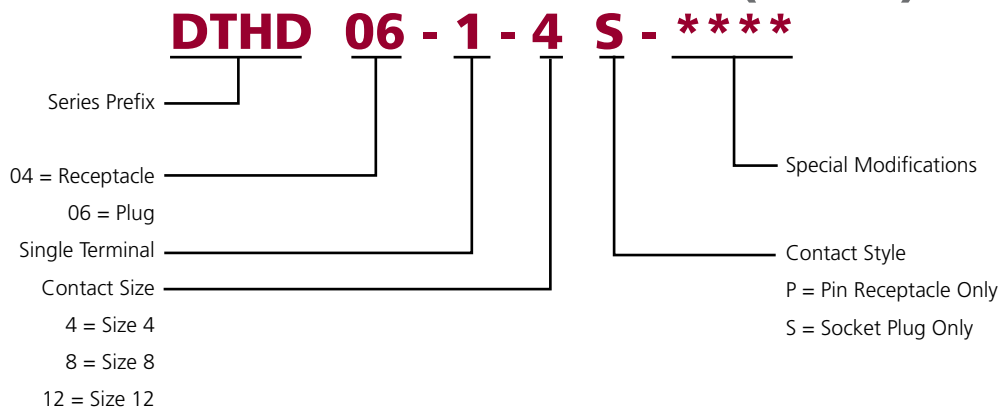





## DTM Series Size 20 Contacts




**2**  
2 size 20




**3**  
3 size 20




**4**  
4 size 20



**6**  
6 size 20




**8**  
8 size 20




**12**  
12 size 20


## DT & DT BUSSED Series Size 16 Contacts




**2**  
2 size 16




**3**  
3 size 16




**4**  
4 size 16



**6**  
6 size 16




**8**  
8 size 16




**12**  
12 size 16

## DTP Series Size 12 Contacts




**2**  
2 size 12




**4**  
4 size 12


## DTHD Series Size 4, 8 & 12



**1**  
1 size 4



**1**  
1 size 8




**1**  
1 size 12



## DT Series BUSSED Arrangements

Standard DT Receptacles Bussed to Customer Specifications

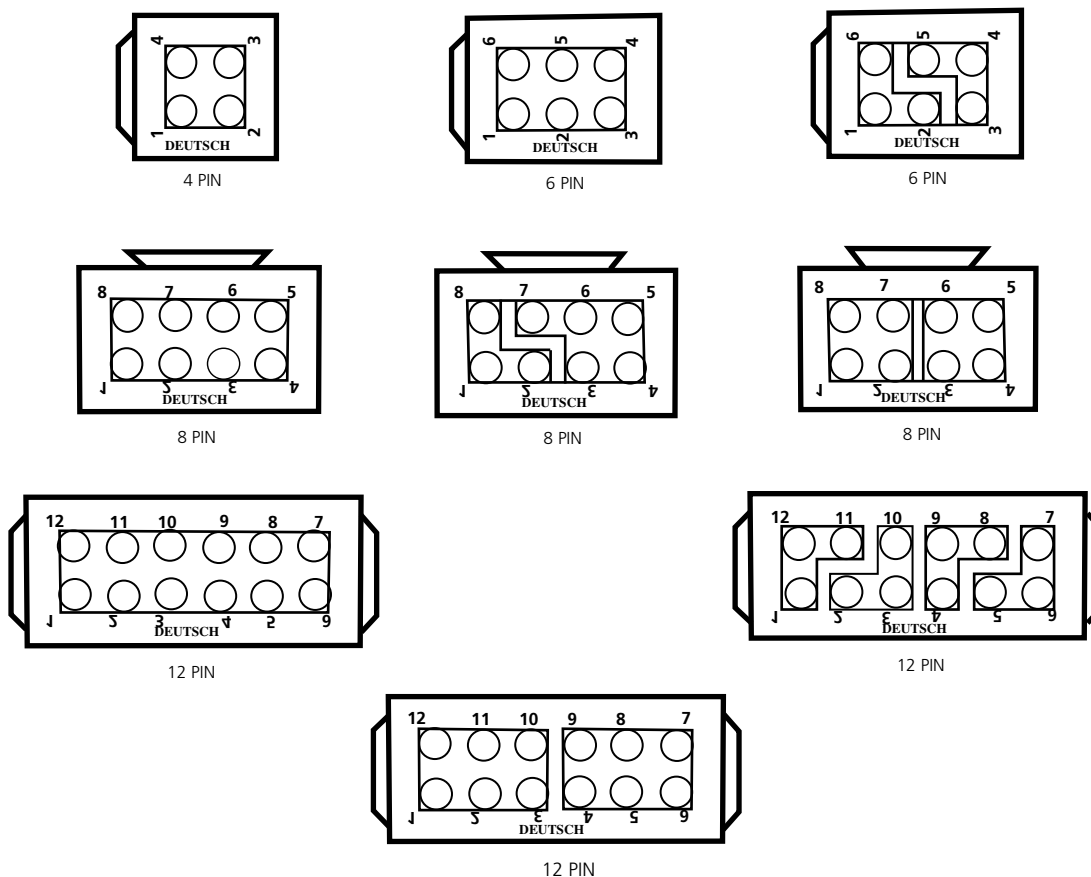

Arrangements shown are currently available. For additional arrangements contact factory.

**ALL PART NUMBERS ARE  
FOR "BLACK"**

| MAX CURRENT RATINGS | NICKEL BUSS P/N | GOLD BUSS P/N  | MATING PLUG P/N |
|---------------------|-----------------|----------------|-----------------|
| 4 PIN = 26 AMPS     | DT04-4P-EP13    | DT04-4P-EP12   | DT06-4S-****    |
| 6 PIN = 39 AMPS     | DT04-6P-EP13    | DT04-6P-EP12   | DT06-6S-****    |
| 3 PIN = 13 AMPS     | DT04-6P-EP14    | DT04-6P-EP15   | DT06-6S-****    |
| 8 PIN = 52 AMPS     | DT-8PB-P021     | DT04-8PB-P016  | DT06-08SB-****  |
| 5 PIN = 26 AMPS     | DT04-8PB-P028   | DT04-8PB-P029  | DT06-08SB-****  |
| 4 PIN = 26 AMPS     | DT04-8PB-P026   | DT04-8PB-P027  | DT06-08SB-****  |
| 3 PIN = 13 AMPS     | DT04-3P-***     | DT04-3P-***    | DT06-3S-****    |
| 12 PIN = 76 AMPS    | DT04-12PB-P021  | DT04-12PB-P016 | DT06-12SB-****  |
| 6 PIN = 39 AMPS     | DT04-12PB-P026  | DT04-12PB-P027 | DT06-12SB-****  |
| 3 PIN = 13 AMPS     | DT04-12PB-P030  | DT04-12PB-P031 | DT06-12SB-****  |

**PLEASE CONSULT FACTORY FOR AVAILABILITY AND ALTERNATE KEYING**



# DT Series Technical Manual

## CONTACTS AND APPLICATION DATA


### Solid Contacts

| SIZE | SOLID CONTACT PART NUMBERS |               | WIRE SIZE<br>AWG (mm <sup>2</sup> ) | RECOMMENDED<br>STRIP LENGTH<br>INCHES (mm) | MIN CONTACT<br>RETENTION<br>LBS (N) | REF CRIMP<br>TENSILE<br>LBS (N) | MAX RATED<br>AMPS AT 125°C<br>CONTINUOUS |
|------|----------------------------|---------------|-------------------------------------|--------------------------------------------|-------------------------------------|---------------------------------|------------------------------------------|
|      | PIN                        | SOCKET        |                                     |                                            |                                     |                                 |                                          |
| 20   | 0460-010-20**              | 0462-005-20** | 16-18<br>(1.0-0.75)                 | .156-.218<br>(3.96-5.54)                   | 20<br>(89)                          | 20<br>(89)                      | 5.0                                      |
| 20   | 0460-202-20**              | 0462-201-20** | 20<br>(0.50)                        | .156-.218<br>(3.96 - 5.54)                 | 20<br>(89)                          | 20<br>(89)                      | 7.5                                      |
| 16   | 0460-202-16**              | 0462-201-16** | 16-20<br>(1.0 - 0.50)               | .250 - .312<br>(6.35 - 7.92)               | 25<br>(111)                         | 35-20<br>(156-89)               | 13                                       |
| 16   | 0460-215-16**              | 0462-209-16** | 14<br>(2.0)                         | .250 - .312<br>(6.35 - 7.92)               | 25<br>(111)                         | 70<br>(311)                     | 13                                       |
| 12   | 0460-204-12**              | 0462-203-12** | 12-14<br>(3.0 - 2.0)                | .222 - .284<br>(5.64 - 7.21)               | 30<br>(134)                         | 75-70<br>(334 - 311)            | 25                                       |
| 8    | 0460-204-08**              | 0462-203-08** | 8-10<br>(8.0 - 5.0)                 | .430 - .492<br>(10.92 - 12.50)             | 35<br>(156)                         | 125-90<br>(556-400)             | 60                                       |
| 4    | 0460-204-04**              | 0462-203-04** | 6<br>(13.0)                         | .430-.492<br>(10.92-12.50)                 | 35<br>(156)                         | 300<br>(1334)                   | 100                                      |


\* See Envelope Print 0425-205-0000. Consult factory for alternate finishes.

### Solid Contacts

Socket

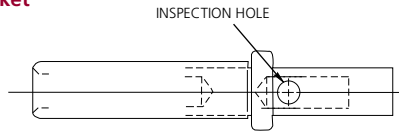


Pin

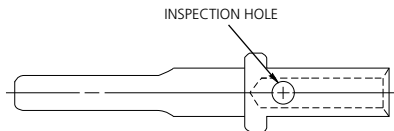


### Stamped and Formed Contacts

Pin



Socket



### Stamped & Formed Contacts

| SIZE | STAMPED & FORMED CONTACT PART NUMBERS |              | CARRIER STRIP IDENTIFICATION | WIRE SIZE<br>AWG (mm <sup>2</sup> ) | WIRE INSULATION O.D. RANGE   | RECOMMENDED STRIP LENGTH INCHES (mm) | MIN CONT. RETENTION LBS (N) | REF CRIMP TENSILE LBS (N) | MAX RATED AMPS AT 125°C CONTINUOUS |
|------|---------------------------------------|--------------|------------------------------|-------------------------------------|------------------------------|--------------------------------------|-----------------------------|---------------------------|------------------------------------|
|      | PIN                                   | SOCKET       |                              |                                     |                              |                                      |                             |                           |                                    |
| 20   | 1060-20-01**                          | 1062-20-01** | 20 - 01                      | 16 - 22<br>(1.5 - 0.35)             | .075 - .125<br>(1.91 - 3.15) | .150 - .200<br>(3.81 - 5.08)         | 20<br>(89)                  | 20 - 10<br>(89 - 45)      | 7.5                                |
| 20   | 1060-20-02**                          | 1062-20-02** | 20 - 02                      | 16 - 22<br>(1.5 - 0.35)             | .051 - .085<br>(1.30 - 2.16) | .150 - .200<br>(3.81 - 5.08)         | 20<br>(89)                  | 20 - 10<br>(89 - 45)      | 7.5                                |
| 20   | N/A                                   | 1062-20-03** | 20 - 03                      | 16 - 22<br>(1.5 - 0.35)             | .075 - .125<br>(1.91 - 3.15) | .150 - .200<br>(3.81 - 5.08)         | 20<br>(89)                  | 20 - 10<br>(89 - 45)      | 7.5                                |
| 20   | 1060-20-06**                          | 1062-20-06** | 20 - 06                      | 14 - 16<br>(2.5 - 1.0)              | .075 - .125<br>(1.91 - 3.15) | .150 - .200<br>(3.81 - 5.08)         | 20<br>(89)                  | 20 - 10<br>(89 - 45)      | 7.5                                |
| 16   | 1060-14-01**                          | 1062-14-01** | 14-16                        | 14 - 18<br>(2.0 - .75)              | .095 - .150<br>(2.41 - 3.81) | .150 - .200<br>(3.81 - 5.08)         | 25<br>(111)                 | 25<br>(111)               | 13                                 |
| 16   | 1060-14-10**                          | 1062-14-10** | 14 - 16                      | 14 - 18<br>(2.0 - .75)              | .095 - .150<br>(2.41 - 3.81) | .150 - .200<br>(3.81 - 5.08)         | 25<br>(111)                 | 25<br>(111)               | 13                                 |
| 16   | 1060-16-01**                          | 1062-16-01** | 16 - 18                      | 14 - 18<br>(2.0 - .75)              | .075 - .140<br>(1.91 - 3.55) | .150 - .200<br>(3.81 - 5.08)         | 25<br>(111)                 | 25<br>(111)               | 13                                 |
| 16   | 1060-16-06**                          | 1062-16-06** | 0.5 - 1.0                    | 16 - 20<br>(1.0 - 0.50)             | .055 - .100<br>(1.40 - 2.54) | .150 - .200<br>(3.81 - 5.08)         | 25<br>(111)                 | 25 - 15<br>(111 - 67)     | 13                                 |
| 16   | 1060-16-07**                          | 1062-16-07** | 0.75 - 2.0                   | 14 - 18<br>(2.0 - .75)              | .075 - .140<br>(1.91 - 3.55) | .150 - .200<br>(3.81 - 5.08)         | 25<br>(111)                 | 25<br>(111)               | 13                                 |
| 16   | 1060-16-09**                          | 1062-16-09** | 16 - 18                      | 14 - 18<br>(2.0 - .75)              | .075 - .140<br>(1.91 - 3.55) | .150 - .200<br>(3.81 - 5.08)         | 25<br>(111)                 | 25<br>(111)               | 13                                 |
| 16   | 1060-16-12**                          | 1062-16-12** | 1.0 - 2.5                    | 12 - 16<br>(2.5 - 1.0)              | .075 - .140<br>(1.91 - 3.55) | .175 - .225<br>(4.45 - 5.72)         | 25<br>(111)                 | 25<br>(111)               | 13                                 |
| 16   | N/A                                   | 1062-16-14** | 14 - 16                      | 12 - 16<br>(2.5 - 1.0)              | .095 - .140<br>(1.91 - 3.55) | .175 - .225<br>(4.45 - 5.72)         | 25<br>(111)                 | 25<br>(111)               | 13                                 |
| 12   | 1060-12-01**                          | 1062-12-01** | 12 - 14                      | 12 - 14<br>(4.0 - 2.0)              | .113 - .176<br>(2.87 - 4.47) | .225 - .275<br>(5.72 - 6.99)         | 30<br>(134)                 | 70<br>(311)               | 25                                 |
| 12   | 1060-12-02**                          | 1062-12-02** | 10 - 12                      | 10 - 12<br>(6.0 - 4.0)              | .140 - .204<br>(3.56 - 5.18) | .225 - .275<br>(5.72 - 6.99)         | 30<br>(134)                 | 70<br>(311)               | 25                                 |

\*\* = Plating Codes Consult factory for custom finish needs. Consult factory for alternate finishes

For 12 Size, see 0425-041-0000 and 0425-208-0000


For 16 Size, see 0425-039-0000, 0425-059-0000, and 0425-203-0000

For 20 Size, see 0425-059-0000 and 0425-207-0000




## Contact Retention System (DTHD)


Required Removal Tool (See page 12)

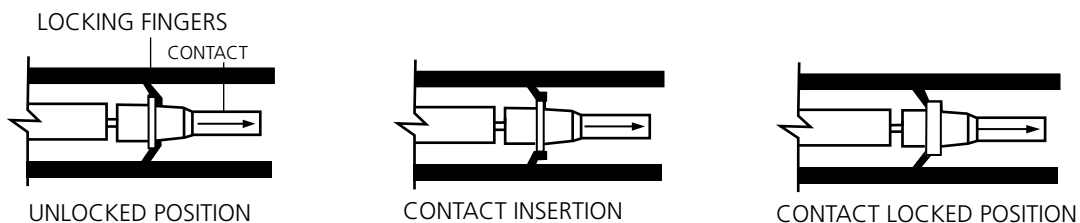


## Contact Removal Procedure

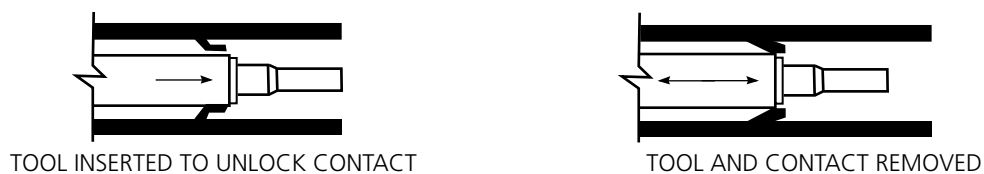

## Contact Insertion System (DTM/DT/DTP)

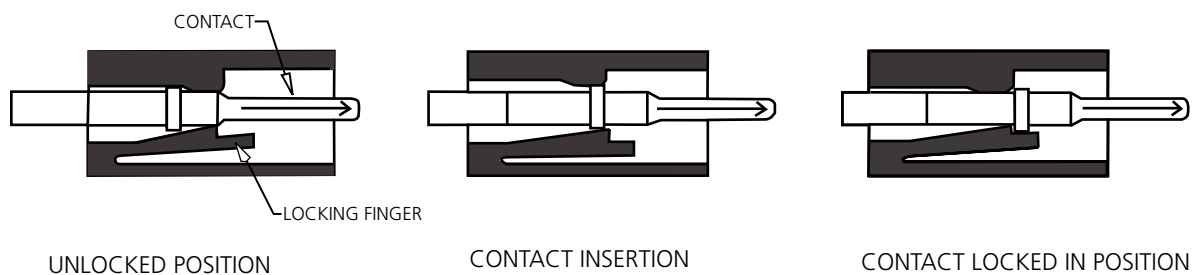


## Contact Removal Procedure (DTM/DT/DTP)

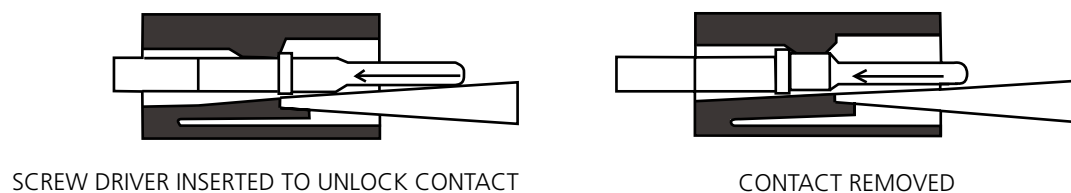





## Assembly Contact Insertion (DTM, DT, DTP)

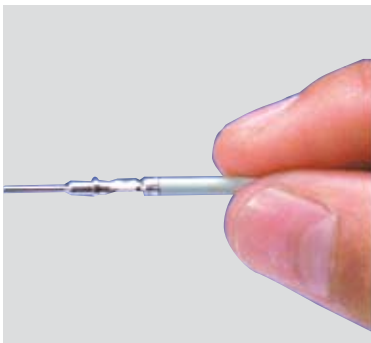


1. Grasp crimped contact approximately 1.0" (25.4mm) behind the contact barrel.

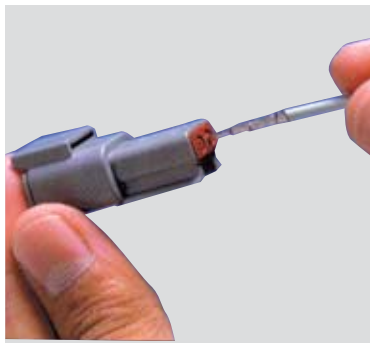

2. Hold connector with rear grommet facing you.

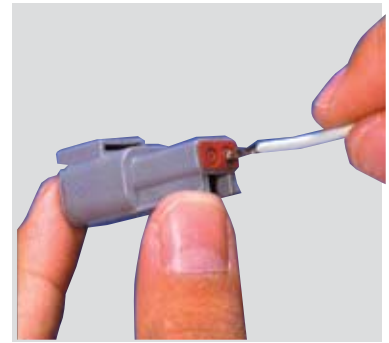


3. Push contact straight into connector grommet until a click is felt. A slight tug will confirm that it is properly locked in place.

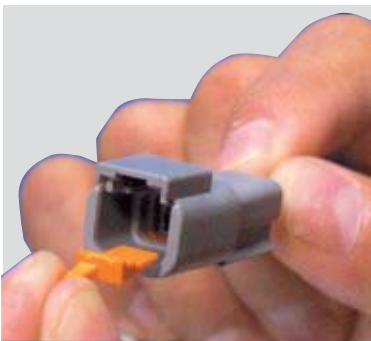


4. Once all contacts are in place, insert orange wedge: receptacles - with half holes aligning with contacts. Plugs - with contacts aligning behind full holes. The orange wedge will snap into place.

NOTE: The receptacle is shown - use the same procedure for plug.

## Contact Removal

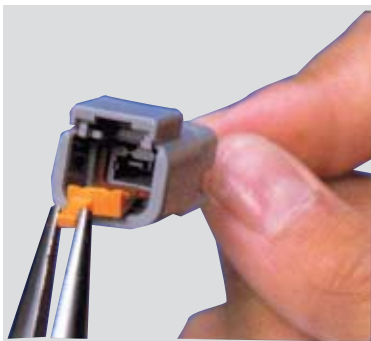

1. Remove orange wedge using needle-nose pliers to pull wedge straight out.

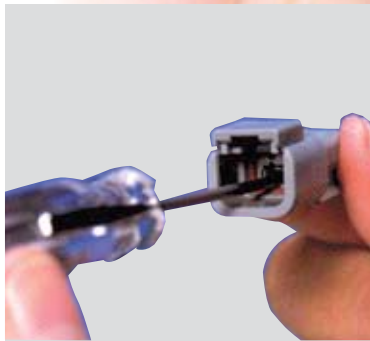

2. To remove the contacts, gently pull wire backwards, while at the same time releasing the locking finger by moving it away from the contact with a screwdriver.



3. Hold the rear seal in place, as removing the contact will displace the seal.



## Accessories



To meet the application requirements where wires are to be protected, the DT Series may be supplied with boot adaptors. These will accept shaped boots / sleeves or shrink tubing. Parts for standard or thin wall wire are available.

## Shrink Boot Adaptor Modification Numbers

### Part Number - Plugs

| Number of Ways | Basic Part Number | Grey  |           | Black |           |
|----------------|-------------------|-------|-----------|-------|-----------|
|                |                   | Std.  | Thin Wall | Std.  | Thin Wall |
| 2              | DT06-2S           | -E008 | -CE04     | -EP11 | -CE13     |
| 3              | DT06-3S           | -E008 | -CE04     | -EP11 | -CE13     |
| 4              | DT06-4S           | -E008 | -CE04     | -EP11 | -CE13     |
| 6              | DT06-6S           | -E008 | -CE04     | -EP11 | -CE13     |
| 8              | DT06-8SA          | -E008 | -CE04     | -EP11 | -CE13     |
| 12             | DT06-12SA         | -E008 | -CE04     | -EP11 | -CE13     |

### Part Number - Receptacles

| Number of Ways | Basic Part Number | Grey  |           | Black |           |
|----------------|-------------------|-------|-----------|-------|-----------|
|                |                   | Std.  | Thin Wall | Std.  | Thin Wall |
| 2              | DT04-2P           | -E008 | -CE04     | -EE01 | -CE09     |
| 3              | DT04-3P           | -E008 | -CE04     | -EE01 | -CE09     |
| 4              | DT04-4P           | -E008 | -CE04     | -EE01 | -CE09     |
| 6              | DT04-6P           | -E008 | -CE04     | -EE01 | -CE09     |
| 8              | DT04-8PA          | -E008 | -CE04     | -EE01 | -CE09     |
| 12             | DT04-12PA         | -E008 | -CE04     | -EE01 | -CE09     |

## DTHD Removal Tools

| NORMAL WIRE SEALS (N) |      |                |
|-----------------------|------|----------------|
| PART NO.              | SIZE | WIRE RANGE AWG |
| 114010                | 12   | 12-14          |
| 114008                | 8    | 8-10           |
| 114009                | 4    | 6              |

| EXTRA THIN WALL WIRE SEALS (E) |      |                |
|--------------------------------|------|----------------|
| PART NO.                       | SIZE | WIRE RANGE AWG |
| 0411-337-1205                  | 12   | 12-14          |
| 0411-353-0805                  | 8    | 8-10           |
| 114009                         | 4    | 6              |

| SEALING PLUG |               |
|--------------|---------------|
| CONTACT SIZE | PART NO.      |
| 20           | 0413-204-2005 |
| 16 -12       | 114017        |
| 8            | 114018        |
| 4            | 114019        |

**Wire Sealing Range: Standard** - 2.24mm - 3.68mm (0.088188" - 0.144881) wire insulation diameter

**Thin wall** - 1.35mm - 3.05mm (0.053149 - 0.120098") wire insulation diameter

**DT Mounting Clips****Metal Mounting Clips**

1027-001-0800



1027-003-1200





1027-004-1200



1027-005-1200



1027-014-0800

1011-026-0205  
(Thru Hole)1011-027-0805  
(Thru Hole)1011-030-0205  
(Snap Fit)1011-310-0205  
(W/Self Mounting Stud)**Metal Mounting Clips****Plastic Mounting Clips**

| Part Number   | Used On                                                   | Material             | Hole O.D.<br>in. (mm) | Part Number   | Used On                                                   | Material | Color |
|---------------|-----------------------------------------------------------|----------------------|-----------------------|---------------|-----------------------------------------------------------|----------|-------|
| 1027-003-1200 | DTM (all)<br>DT 2, 3, 4, 6, 12<br>DTP (all)<br>DTHD (all) | Stainless Steel      | .433 (11.0)           | 1011-026-0205 | DTM (all)<br>DT 2, 3, 4, 6, 12<br>DTP (all)<br>DTHD (all) | Plastic  | Gray  |
| 1027-005-1200 | DTM (all)<br>DT 2, 3, 4, 6, 12<br>DTP (all)<br>DTHD (all) | Stainless Steel      | .512 (13.0)           | 1011-027-0805 | DT 8 Cavity Only                                          | Plastic  | Gray  |
| 1027-004-1200 | DTM (all)<br>DT 2, 3, 4, 6, 12<br>DTP (all)<br>DTHD (all) | Steel w/Zinc Plating | .512 (13.0)           | 1011-030-0205 | DTM (all)<br>DT 2, 3, 4, 6, 12<br>DTP (all)<br>DTHD (all) | Plastic  | Black |
| 1027-001-0800 | DT 8 cavity only                                          | Stainless Steel      | .433 (11.0)           | 1011-031-0805 | DT 8 Pin                                                  | Plastic  | Black |
| 1027-014-0800 | DT 8 cavity only                                          | Steel w/Zinc Plating | .323 (8.2)            |               |                                                           |          |       |
| 1027-002-0800 | DT 8 cavity only                                          | Steel w/Zinc         | .512 (13.0)           |               |                                                           |          |       |
| 1027-006-0800 | DT 8 cavity only                                          | Steel w/Zinc         | .512 (13.0)           |               |                                                           |          |       |



## Back Shells

The Deutsch range of Back Shells is designed to snap fix onto the full range of standard DT connectors (i.e. without end cap). The innovative design allows each unit to accommodate several different sizes of slit or unslit corrugated tubes.

They are available for both plugs and receptacles and the options include straight (180°) and right angled (90°) adaptors for 2, 3, 4, 6, 8 and 12 way, additionally a version equipped with strain relief features 2, 3, 4 and 6 way for jacketed cables.

Material: PA 6.6 / black


Operating Temperatures: -40 to 125° C

IP rating: IP40


Handling Temperature: -5 to 45° C

| Connector | Outlet | Strain Relief | Envelope Dimensions (mm) |      |      |      | Item No. | Part No.      |
|-----------|--------|---------------|--------------------------|------|------|------|----------|---------------|
|           |        |               | a                        | b    | L    | H    |          |               |
| DT04-2P   | 180    | x             | 18,0                     | 17,0 | 54,5 | -    | 61031-23 | 1011-257-0205 |
|           | 180    |               | 18,0                     | 17,0 | 54,5 | -    | 61031-33 | 1011-229-0205 |
|           | 90     | x             | 18,0                     | 17,0 | 40,0 | 37,0 | 61031-24 | 1011-258-0205 |
|           | 90     |               | 18,0                     | 17,0 | 40,0 | 37,0 | 61031-34 | 1011-230-0205 |
| DT06-2S   | 180    | x             | 16,0                     | 17,0 | 45,5 | -    | 61031-25 | 1011-255-0205 |
|           | 180    |               | 16,0                     | 17,0 | 45,5 | -    | 61031-35 | 1011-227-0205 |
|           | 90     | x             | 16,0                     | 17,0 | 31,0 | 37,0 | 61031-26 | 1011-256-0205 |
|           | 90     |               | 16,0                     | 17,0 | 31,0 | 37,0 | 61031-36 | 1011-228-0205 |
| DT04-3P   | 180    | x             | 25,0                     | 23,0 | 64,5 | -    | 61051-23 | 1011-261-0305 |
|           | 180    |               | 25,0                     | 23,0 | 64,5 | -    | 61051-33 | 1011-233-0305 |
|           | 90     | x             | 25,0                     | 23,0 | 44,0 | 48,0 | 61051-24 | 1011-262-0305 |
|           | 90     |               | 25,0                     | 23,0 | 44,0 | 48,0 | 61051-34 | 1011-234-0305 |
| DT06-3S   | 180    | x             | 21,0                     | 23,0 | 56,0 | -    | 61051-25 | 1011-259-0305 |
|           | 180    |               | 21,0                     | 23,0 | 56,0 | -    | 61051-35 | 1011-231-0305 |
|           | 90     | x             | 21,0                     | 23,0 | 36,0 | 48,0 | 61051-26 | 1011-260-0305 |
|           | 90     |               | 21,0                     | 23,0 | 36,0 | 48,0 | 61051-36 | 1011-232-0305 |
| DT04-4P   | 180    | x             | 22,0                     | 22,0 | 59,5 | -    | 61048-23 | 1011-265-0405 |
|           | 180    |               | 22,0                     | 22,0 | 59,5 | -    | 61048-33 | 1011-237-0405 |
|           | 90     | x             | 22,0                     | 22,0 | 43,0 | 45,0 | 61048-24 | 1011-266-0405 |
|           | 90     |               | 22,0                     | 22,0 | 43,0 | 45,0 | 61048-34 | 1011-238-0405 |
| DT06-4S   | 180    | x             | 20,0                     | 22,0 | 53,0 | -    | 61048-25 | 1011-263-0405 |
|           | 180    |               | 20,0                     | 22,0 | 53,0 | -    | 61048-35 | 1011-235-0405 |
|           | 90     | x             | 20,0                     | 22,0 | 35,0 | 45,0 | 61048-26 | 1011-264-0405 |
|           | 90     |               | 20,0                     | 22,0 | 35,0 | 45,0 | 61048-36 | 1011-236-0405 |
| DT04-6P   | 180    | x             | 26,0                     | 21,5 | 64,0 | -    | 61057-23 | 1011-269-0605 |
|           | 180    |               | 26,0                     | 21,5 | 64,0 | -    | 61057-33 | 1011-241-0605 |
|           | 90     | x             | 26,0                     | 21,5 | 43,0 | 50,0 | 61057-24 | 1011-270-0605 |
|           | 90     |               | 26,0                     | 21,5 | 43,0 | 50,0 | 61057-34 | 1011-242-0605 |
| DT06-6S   | 180    | x             | 23,5                     | 20,0 | 55,5 | -    | 61057-25 | 1011-267-0605 |
|           | 180    |               | 23,5                     | 20,0 | 55,5 | -    | 61057-35 | 1011-239-0605 |
|           | 90     | x             | 23,5                     | 21,0 | 38,0 | 50,0 | 61057-26 | 1011-268-0605 |
|           | 90     |               | 23,5                     | 21,0 | 38,0 | 50,0 | 61057-36 | 1011-240-0605 |
| DT-04-8P  | 180    |               | 27,5                     | 28,0 | 62,0 | -    | 61049-33 | 1011-245-0805 |
|           | 90     |               | 27,5                     | 28,0 | 47,5 | 50,5 | 61049-34 | 1011-246-0805 |
| DT06-8S   | 180    |               | 26,5                     | 28,5 | 57,0 | -    | 61049-35 | 1011-243-0805 |
|           | 90     |               | 24,5                     | 28,5 | 39,5 | 49,0 | 61049-36 | 1011-244-0805 |
| DT04-12P  | 180    |               | 26,0                     | 35,5 | 63,5 | -    | 61052-33 | 1011-249-1205 |
|           | 90     |               | 26,0                     | 36,5 | 53,0 | 50,5 | 61052-34 | 1011-250-1205 |
| DT06-12S  | 180    |               | 23,0                     | 36,0 | 58,5 | -    | 61052-35 | 1011-247-1205 |
|           | 90     |               | 23,0                     | 36,0 | 43,5 | 50,5 | 61052-36 | 1011-248-1205 |


Tube Size by Connector and Additional Length (mm) needed




Receptacle 180°



Receptacle 90°





Plug 180°



Plug 90°



## Back Shells

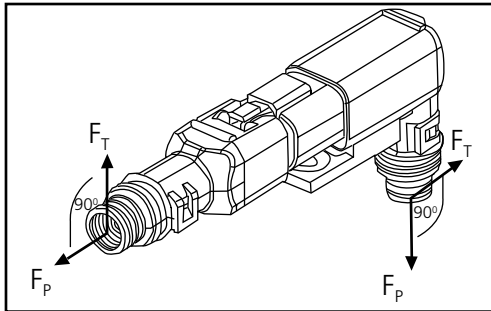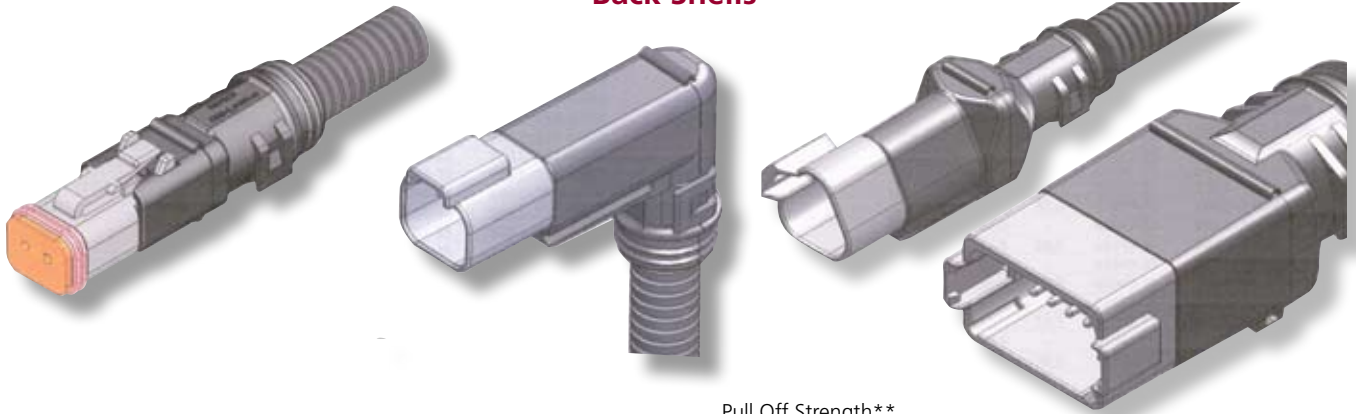

Pull Off Strength\*\*

| Connector           | F <sub>p</sub> (N) | F <sub>p</sub> (N) |
|---------------------|--------------------|--------------------|
| DT04-2P / DT06-2S   | 50 / 50            | 50 / 10            |
| DT04-3P / DT06-3S   | 50 / 50            | 50 / 50            |
| DT04-4P / DT06-4S   | 50 / 50            | 50 / 25            |
| DT04-6P / DT06-6S   | 50 / 50            | 50 / 30            |
| DT04-8P / DT06-8S   | 50 / 50            | 50 / 35            |
| DT04-12P / DT06-12S | 50 / 50            | 50 / 40            |

\*\* Valid for unslit corrugated tubes. Follow also connector mounting instruction: no force must apply to wires and connector to maintain continuous tightness of the connection.

Tube size by connector and additional length (mm) needed



| Connector           |   | NW6      | NW7,5    | NW8,5    | NW10     | NW13     | NW17     |
|---------------------|---|----------|----------|----------|----------|----------|----------|
| DT04-2P / DT06-2S   |   | X + 16,0 | X + 16,0 | X + 10,0 | X + 7,0  | -        | -        |
| DT04-3P / DT06-3S   |   | X + 18,0 | X + 18,0 | X + 12,5 | X + 7,0  | -        | -        |
| DT04-4P / DT06-4S   |   | X + 16,0 | X + 16,0 | X + 10,0 | X + 13,0 | -        | -        |
| DT04-6P / DT06-6S   |   | -        | -        | X + 20,0 | X + 14,0 | X + 7,0  | -        |
| DT04-8P / DT06-8S   |   | -        | -        | X + 20,0 | X + 24,5 | X + 8,0  | -        |
| DT04-12P / DT06-12S |   | -        | -        | -        | -        | X + 16,0 | X + 10,0 |
| Corrugated          | D | 9,3      | 10,0     | 11,7     | 13,0     | 15,8     | 21,2     |
| Tube Details        | P | 2,8      | 2,7      | 2,4      | 2,7      | 2,7      | 3,3      |

X = Tube length needed for harness

Ribs to be used for tube mounting\*

| Connector           | NW6 | NW7,5 | NW8,5 | NW10 | NW13 | NW17 |
|---------------------|-----|-------|-------|------|------|------|
| DT04-2P / DT06-2S   | 6   | 6     | 4     | 3    | -    | -    |
| DT04-3P / DT06-3S   | 7   | 7     | 5     | 3    | -    | -    |
| DT04-4P / DT06-4S   | 6   | 6     | 4     | 3    | -    | -    |
| DT04-6P / DT06-6S   | -   | -     | 7     | 5    | 3    | -    |
| DT04-8P / DT06-8S   | -   | -     | 7     | 5    | 3    | -    |
| DT04-12P / DT06-12S | -   | -     | -     | 7    | 5    | 3    |

\* The corrugated tube must be placed into the ribs as per the above table.

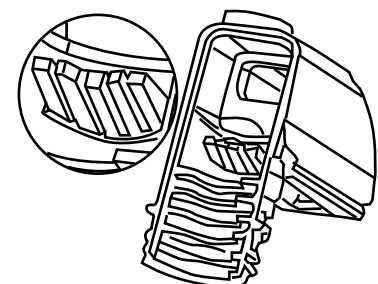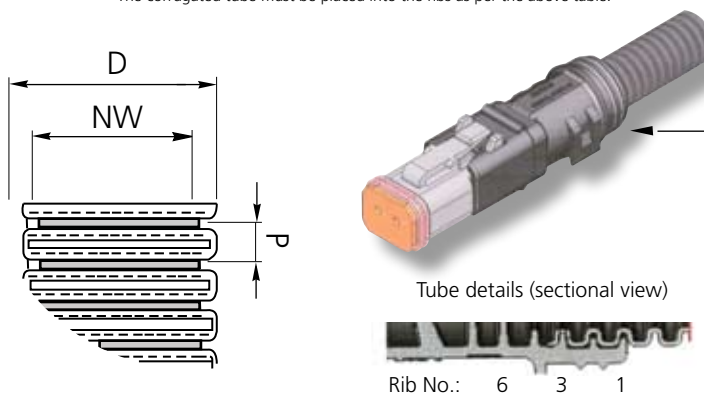


Strain Relief

Deutsch Industrial UK  
Stanier Road  
St. Leonards On Sea  
East Sussex TN 38 9RF  
England  
Ph. 44 (0) 1424 852 722  
Fax 44 (0) 1424 855 979  
industrialuk@deutsch.net

Deutsch Industrial Europe  
Fraunhoferstrasse 11b  
82152 Martinsried  
Germany  
Ph. +49 (0) 89 899157-0  
Fax +49 (0) 89 857 4684  
info.eu@deutsch.net


Deutsch Connectors Trading  
(Shanghai) Co., Ltd.  
Room 1032, 10F Central Plaza,  
381 Huai Hai Zhong Road,  
Shanghai 200020, China  
Tel/Fax: 86-21-6391 5902  
E-mail: salesdichina@deutsch.net

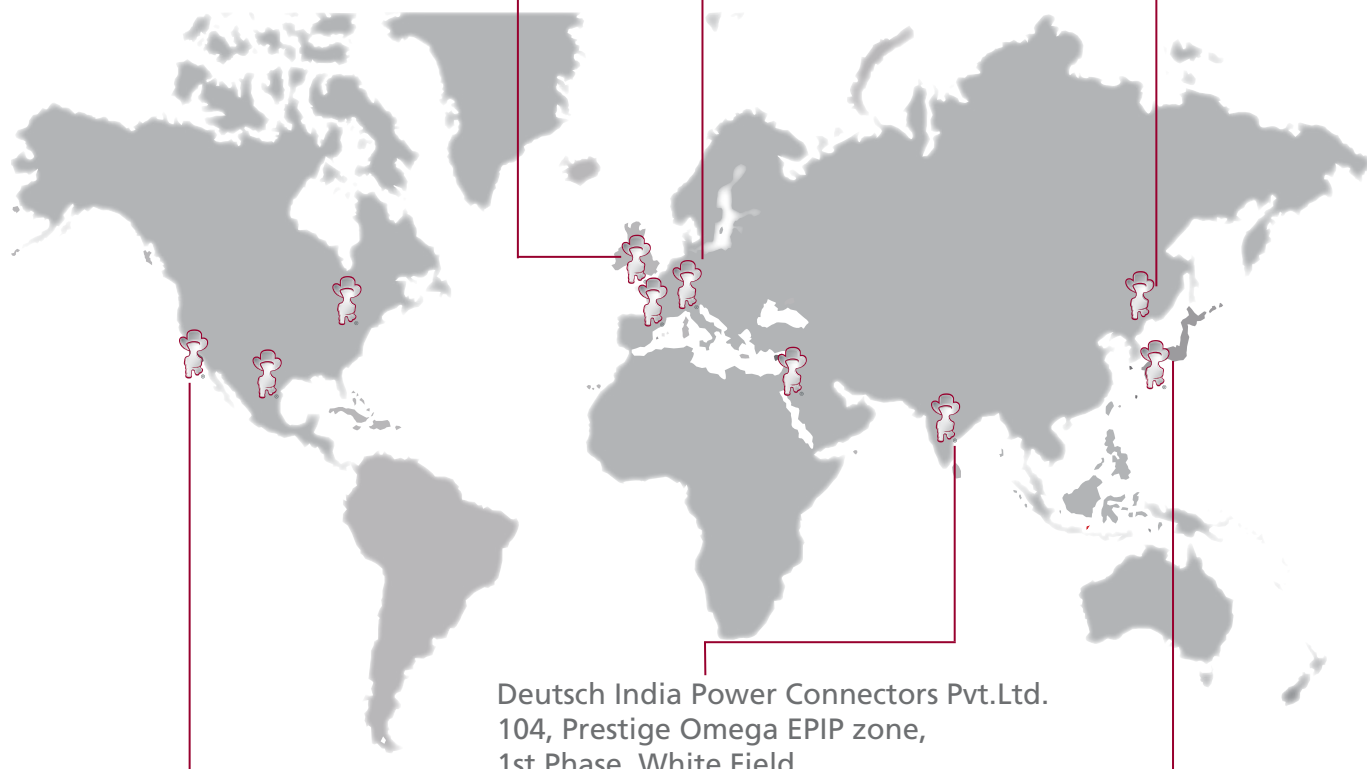

Deutsch Industrial US  
3850 Industrial Ave.  
Hemet, CA 92545  
USA  
Ph. +1 (951) 765-2250  
Fax +1 (951) 765-2255  
insidesales-ipd@deutsch.net



Deutsch India Power Connectors Pvt.Ltd.  
104, Prestige Omega EPIP zone,  
1st Phase, White Field,  
Bangalore - 560 066.  
INDIA.  
Ph: +91 80 40466525  
Mobile: +91 98454 03301

Deutsch Japan Ltd.  
4-3-28 Nishidai  
Itabashi-ku, Tokyo 175-0045  
Japan  
Ph. +81-3-5922-1345  
Fax +81-3-5995-1341  
tnawa@nihon-deutsch.co.jp

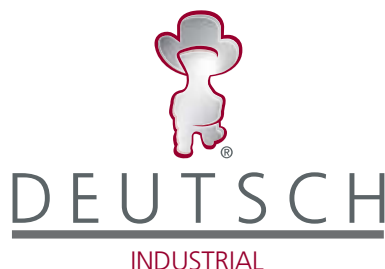

3850 Industrial Avenue, Hemet, California 92545 Tel.: (951) 765-2250 - Fax: (951) 765-2255  
Web: www.deutsch.net - Edition 2/2009

A STEP AHEAD

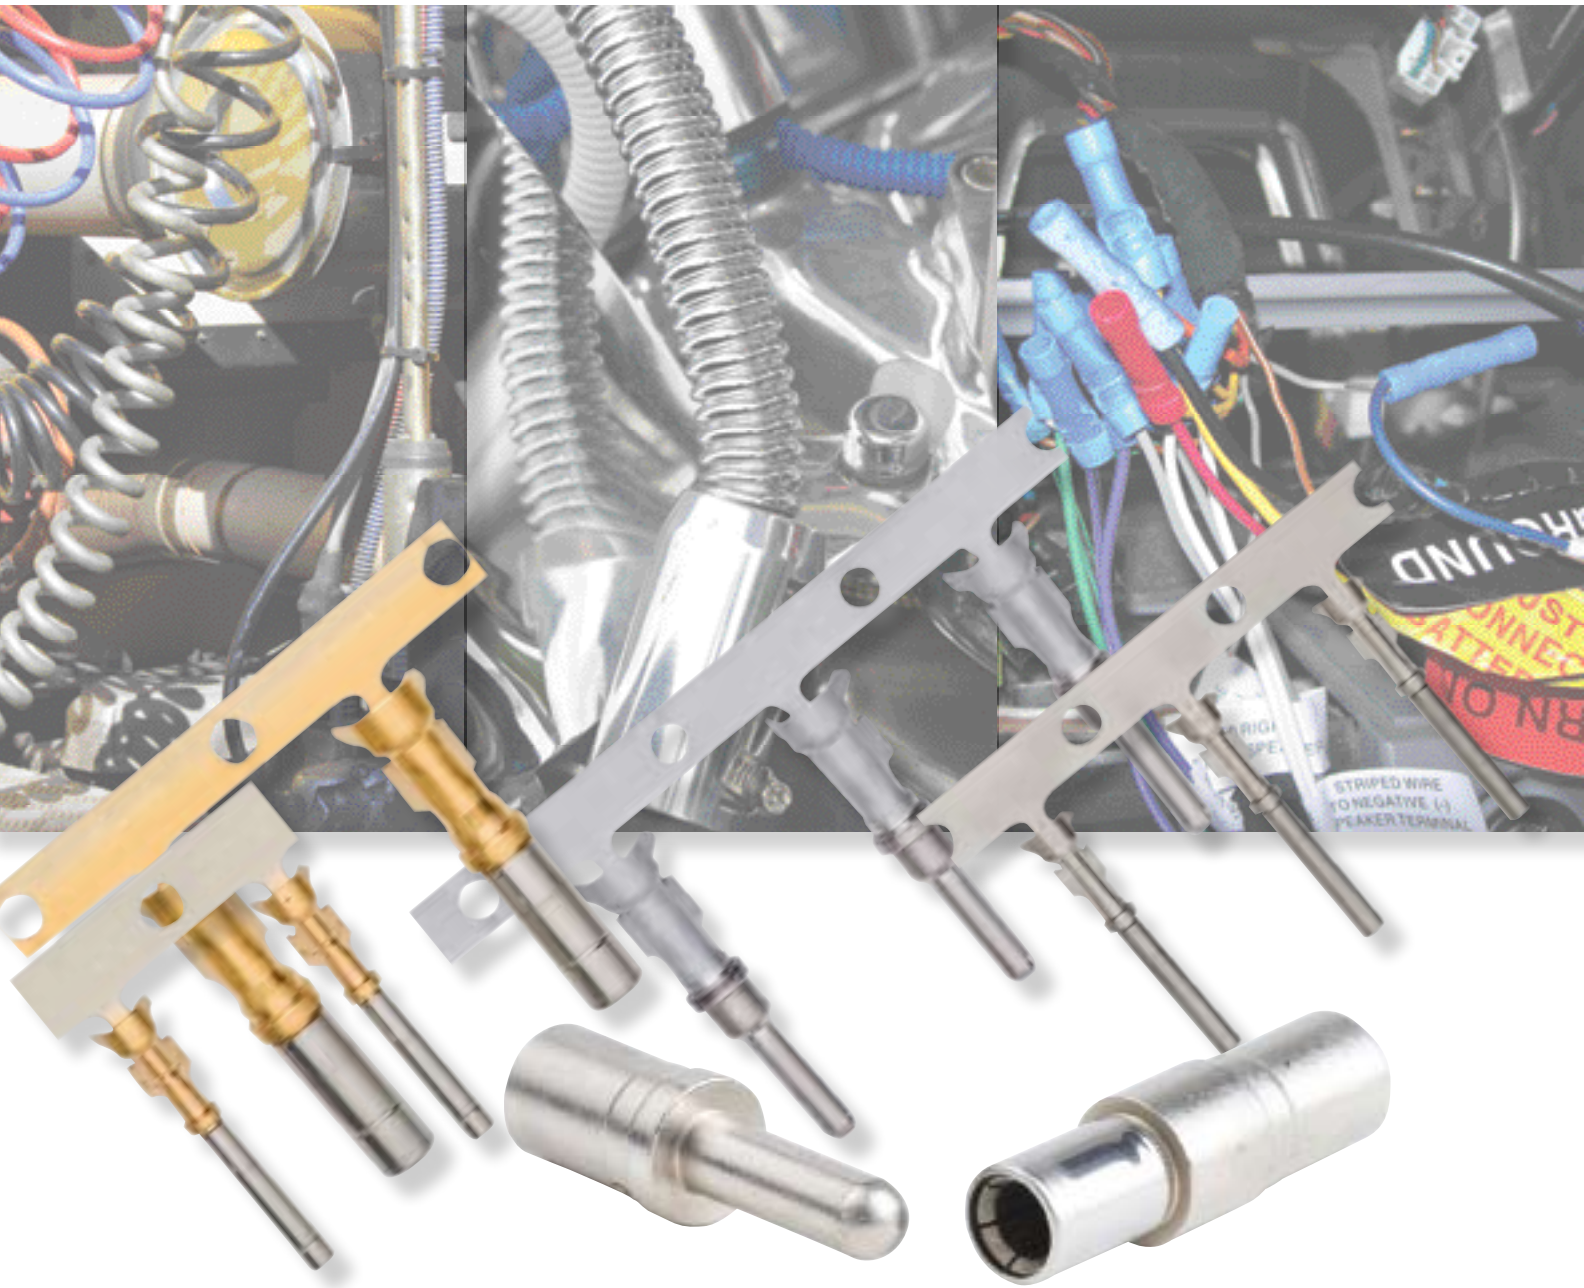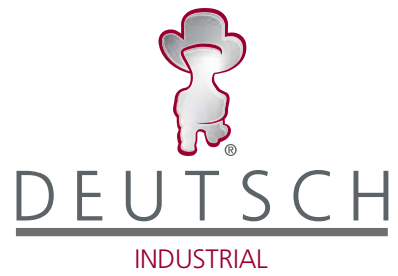

## Common Contact System Technical Manual



|                           |         |
|---------------------------|---------|
| Introduction              | 1       |
| Contents                  | 1       |
| Common Contacts           | 1-5     |
| Crimp Information         | 3-4     |
| General Specifications    | 5       |
| Stamped & Formed Contacts | 6, 9-10 |
| Solid Contacts            | 7-8     |
| Crimping Instructions     | 7-9     |
| P.C.B. Pins               | 11      |
| Contact Glossary          | 12-14   |

## COMMON CONTACT SYSTEM

Deutsch manufactures two product styles of contacts, stamped and formed and solid. Within each style is a separate and distinct manufacturing process that allows the widest application with any Deutsch Industrial connector series.

Deutsch stamped and formed contacts are designed for use where wire termination costs are of primary concern without sacrificing reliability of electrical circuits. The stamped and formed contact series is made on a precision stamping machine using flat strip stock, then a durable and corrosion proof nickel plating is applied. Gold is an optional finish. All Deutsch Industrial terminals protect the split socket tines with a closed entry stainless steel sleeve or sleeveless design. The stamped and formed contact style is sold on reels.

The Deutsch solid contact series is designed for use for larger wire size and heavy duty applications. This style of contact is manufactured using a cold heading process and solid copper alloy wire. The resulting contact is a closed entry design. The standard finish is nickel, with gold plating an option. All Deutsch Industrial terminals protect the split socket tines with a closed

entry stainless steel sleeve. The solid style of contact is sold in bulk.

Both contact styles terminate to wire using crimp type technology. The only variations in Deutsch's common contact systems are those dictated by wire gauge and contact style.

## COMMON CONTACTS

The word "common" describes the Deutsch contact system well. Solid and stamped contacts can be used interchangeably in any Deutsch connector.

The stamped and formed style includes 10 sizes each of pin and socket contacts that terminate 10-22AWG (5.0 - 0.35mm<sup>2</sup>). The specific contact is determined by the outside diameter of wire insulation and conductor size. See the appropriate chart on page 5 of this manual for specific part numbers.


The solid style contact terminates wire from 6 AWG to 20 AWG (13 - 0.5mm<sup>2</sup>). The solid style is available in 6 sizes each of pin and socket. The applicable contact is determined by the size of the conductor only. See the appropriate chart on page 7 of this manual for specific part numbers.

The selection of Deutsch Industrial connectors insures that the contact termination system will be compatible. This reduces changes in the assembly of the wire harness. It also improves performance, reliability and maintainability. Critical functions to any electrical system. The use of a common contact system eliminates many of the failures reported in harnesses where hundreds of different terminations are used. The end result of selecting Deutsch is increased profits and long term performance.





## SOLID CONTACTS

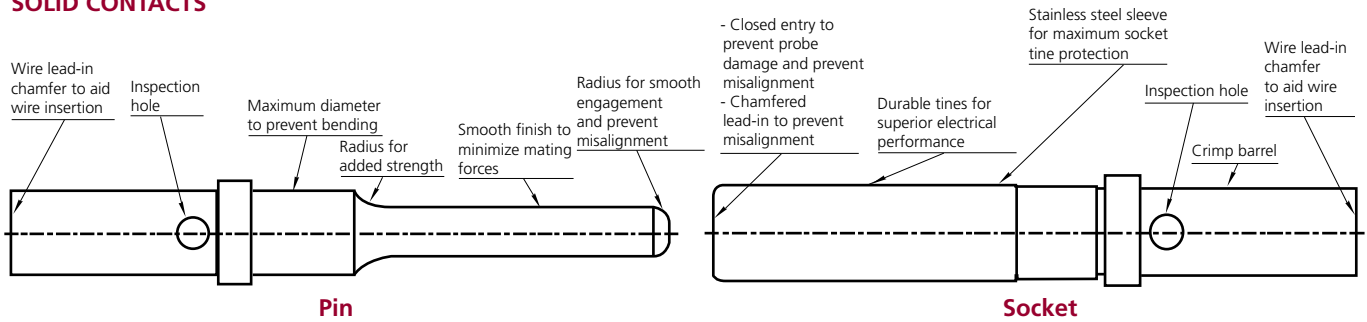

### Material:

Solid copper alloy

### Termination Method:

Crimp

### Manufacturing Method:

Cold-headed

### Finish-Standard:

Nickel plated

### Finish Options:

a) Gold

- Solid shoulder for high tensile strength pin retention.
- Nickel plated as standard for corrosion resistance.
- Inspection hole for conductor strand visibility.
- Insulation cup not required due to integral wiring sealing connector grommet design.

- Solder is not used, eliminating flux corrosion and reducing assembly costs.
- Wire entry chamfer for all wire sizes.
- No retention tangs required, eliminating contact damage and the need for secondary locks.

### Material:

Solid copper alloy

### Termination Method:

Crimp

### Manufacturing Method:

Cold-headed


### Finish-Standard:

Nickel plated

### Finish Options:

a) Gold

## STAMPED CONTACTS

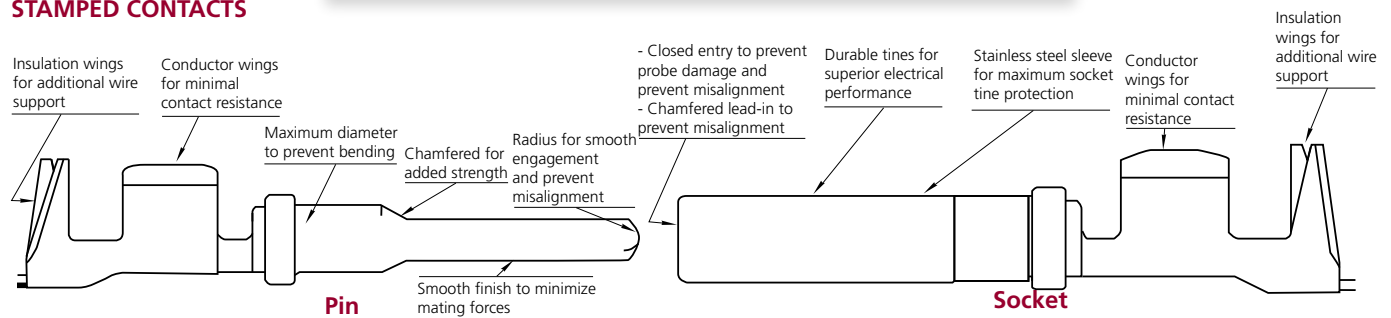

### Material:

Flat strip copper alloy

### Termination Method:

Crimp

### Manufacturing Method:

Stamped & Formed

### Finish-Standard:

Nickel plated Size 16 & 20

Tin/Nickel Size 12

### Finish Options:

a) Gold

### Material:

Flat strip copper alloy with

stainless steel sleeve

### Termination Method:

Crimp

### Manufacturing Method:

Stamped & Formed


### Finish-Standard:

Nickel plated Size 16 & 20

Tin/Nickel Size 12

### Finish Options:

a) Gold

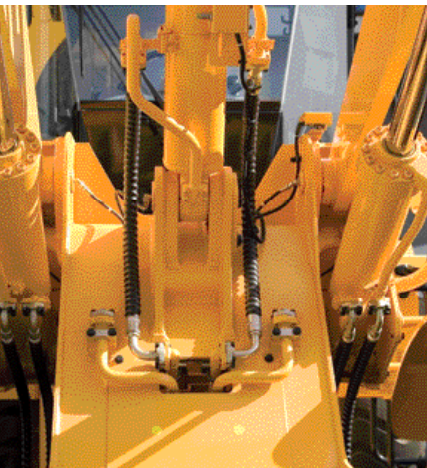



## DEFINITION

Crimping may be defined as the act of joining a conductor to a pin or socket contact using a mechanical tool to compress and displace metal. In a good crimp joint, there is a mutual flow of metal, causing a symmetrical distortion of wire strands and contact material. Such a joint is similar to a cold weld. Mechanical strength and good electrical conductivity are established.

Because of the new environments to which electrical connectors are subjected, there has been a drastic change in thinking relative to the use of precision crimp joints in preference to solder.

## CRIMPING CONFIGURATIONS

Stamped contacts use a folded type of crimp (Fig. 1). Solid contacts use 2, 4, or 8 indents (Fig. 2). The wire strands and the contact material are formed together in a solid mass with reduction of area of the wire strands. A minimum of voids exists.

## CRIMPING CHARACTERISTICS

Connectors utilizing either style of Deutsch crimped contacts permit the removal of these contacts several times. Modification, circuit changes, or replacement of contacts may be made with the same quality assurance as in production line assembly. Crimping may be accomplished either with hand tools, power tools or automated power tools.

## CRIMPED CONTACTS

Mechanically crimping contacts is now the dominant wire termination method, for some very good reasons:

- 1) Since no wet process is involved, corrosion is not a problem. No adhesives, fluxes or additives are used.
- 2) Strength, accuracy and over-all reliability of a crimped contact are controlled by the crimp tool, not the operator. The field tools (except #4 solid style) release the contact only after the full crimping cycle is completed. The tools are relatively inexpensive.
- 3) With smaller wire, the crimp is as strong as the wire itself.
- 4) The joint can be inspected visually. Viewing the wire through an inspection hole in the contact makes inspection quick,

easy and sure, both by the operator and by the inspector.

5) The crimping tool is universal, it accepts both pins and sockets of many types.

6) Plating thickness is not restricted, as in solder joints, so better corrosion resistance and contact reliability are achievable.

7) Crimping can be done anywhere even in the field, without special preparation. Terminations are replaced or modified in the field exactly as in the shop, using the same tools and the same techniques, and with the same ease of operation and certainty of results.


8) Total installed and maintenance costs are lower since joining is quick and easy.

## Crimp Tensile Test

The following information is provided as an aid to manufacturing facilities that terminate Deutsch crimp type contacts. The term "typical" is used to illustrate expected tensile strength results when crimp tooling is in good working order and properly calibrated. The term "minimum" is used to illustrate a point at which tooling is suspected of having excessive wear, insufficient air pressure, bad calibration, etc. Minimum does not imply that the crimp is unacceptable, only that an adjustment should be made.

The manner in which the tensile test is performed is important in order to attain valid test results. An axial load should be applied at a rate of 1.0 in./min starting from zero pounds until there is wire/contact separations or wire breaking. Care should be taken to avoid clamping on the crimp barrel.



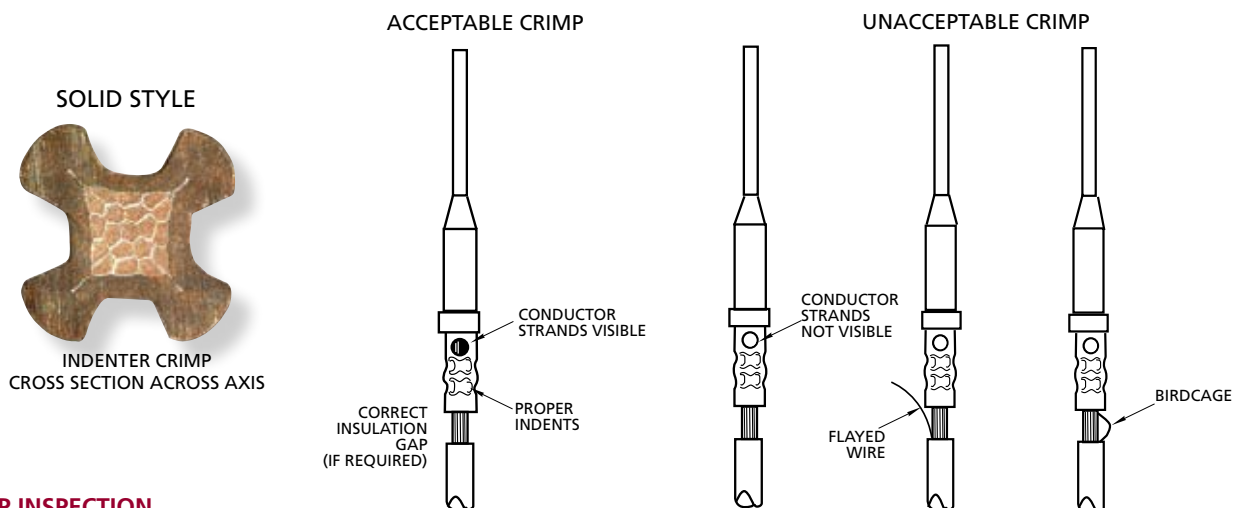

## CRIMP INSPECTION

Crimping tools are, in some case, more expensive than soldering tools, but this is more than off-set by the lower total installation and maintenance costs resulting from the crimping operation. However, controls are required to make sure first, that the operator uses the proper crimping tools designed for the type and size contact being crimped, and then, that the pin or socket is properly inserted into the tool. The wire must be stripped of insulation and fully inserted into the contact. The usual procedure is to insert the wire into the open end of the contact, then close the crimping tool, thus crimping the wall of the contact into the wire at several points around the circumference.

When completed, correct assembly can be checked visually. The removed insulation should expose a conductor length that will pass beyond the inspection hole in the contact and still reveal .025 - .100 (.063 - 2.54) of conductor between the contact and the insulation on the wire. The operator and inspector can thus check for:

- 1) Damaged wire strands.
- 2) Missing wire strands.
- 3) Wire strands not entering the contact barrel.
- 4) Wire not inserted to the proper depth in the contact.

When the correct tool is used for crimping, a good termination is assured.


For more detailed crimp dimensions please request a factory drawing. For Stamped and Formed Style see 0425 -\*\*\* - 0000. For Solid Style see 0425-205-0000.

## COMMON TOOLING


By selecting the Deutsch common contact system, only one style of tool is needed to remove wires. In designs like the DT and DTM Series connectors, even this tool is eliminated. Hand crimp tools are used to crimp different types of contacts to the wire end. For automation, semi and full automatic crimping equipment is available that will process thousands of wire terminations per hour.

## COMMON PROCESSING

Using the Deutsch contact means that the way an O.E.M. supplier attaches a wire to this terminus never varies. This procedural standard allows harness assemblers to become highly proficient in terminating Deutsch connectors.

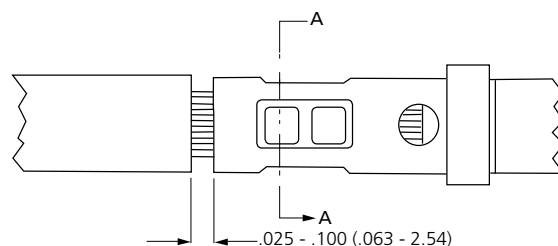

## STAMPED AND FORMED TYPE

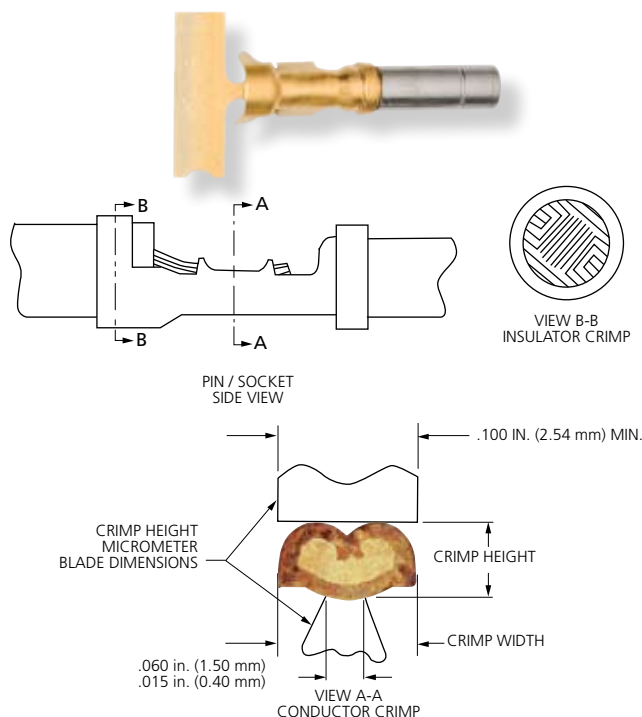



## GENERAL SPECIFICATIONS

### Solid Contacts

Pin: Copper alloy  
 Socket: Copper alloy with stainless steel sleeve  
 Finish: Nickel plating  
 Optional: Gold plating is available for dry circuit applications

### Stamped & Formed Contacts

Pin: Copper alloy  
 Socket: Copper alloy with stainless steel sleeve  
 Finish: Nickel plating  
 Optional: Gold plating is available for dry circuit applications

### Dielectric Withstanding Voltage

Current leakage less than 2 milliamps at 1500 VAC.

### Insulation Resistance:

1000 megohms minimum at 25° C.

### Current Rating (Contact current rating @ 125° C (continuous))

Size 20: 7.5 amps  
 Size 16: 13 amps  
 Size 12: 25 amps  
 Size 8: 60 amps  
 Size 4: 100 amps

### Submersion:

Properly wired and mated connection will withstand immersion under three feet of water without loss of electronic qualities or leakage.

### Fluid Resistance:

Connectors show no damage when exposed to most fluids used in industrial applications.

### Vibration:

No unlocking or unmating and exhibits no mechanical or physical damage after sinusoidal vibration levels of 20 G's at 10 to 2000 Hz in each of the three mutually perpendicular planes. No electrical discontinuities longer than 1 microsecond.

### Temperature:

Operative at temperatures from -55°C to +125° C. Continuous at rated current.

### Contact Retention:

Contacts withstand a minimum load of:

20 lbs. (89N) for size 20  
 25 lbs. (111N) for size 16  
 30 lbs. (133N) for size 12  
 35 lbs. (156N) for size 8  
 35 lbs. (156N) for size 4

### Thermal Cycle:

No cracking, chipping or leaking after 20 test cycles from -55° C to +125.

### Durability:

No electrical or mechanical defects after 100 cycles of engagement and disengagement.

## CONTACT RESISTANCE

| CONTACT SIZE | WIRE GAUGE AWG(mm <sup>2</sup> ) | TEST CURRENT (AMPS) | RESISTANCE (mV) SOLIDS | RESISTANCE (mV) STAMPED & FORMED |
|--------------|----------------------------------|---------------------|------------------------|----------------------------------|
| 20           | 22 (.35)                         | 5.0                 | 60                     | 100                              |
|              | 20 (.50)                         | 7.5                 | 60                     | 100                              |
|              | 18 (.80)                         | 7.5                 | 60                     | 100                              |
| 16           | 16 (1.0)                         | 7.5                 | 60                     | 100                              |
|              | 20 (.50)                         | 7.5                 | 60                     | 100                              |
|              | 18 (.80)                         | 10                  | 60                     | 100                              |
| 12           | 16 (1.0)                         | 13                  | 60                     | 100                              |
|              | 14 (2.0)                         | 13                  | 60                     | 100                              |
|              | 14 (2.0)                         | 18                  | 60                     | 100                              |
| 8            | 12 (3.0)                         | 25                  | 60                     | 100                              |
|              | 10 (5.0)                         | 25                  | N/A                    | 100                              |
|              | 8 (8.60)                         | 60                  | 60                     | N/A                              |
| 4            | 10 (5.60)                        | 60                  | 60                     | N/A                              |
|              | 6 (13.0)                         | 100                 | 60                     | N/A                              |

## WIRE SEALING RANGE

| CONTACT SIZE | RECOMMENDED WIRE INSULATION O.D. |                              |
|--------------|----------------------------------|------------------------------|
|              | N-SEAL                           | E-SEAL                       |
| #20          | .053 - .120<br>(1.35 - 3.05)     | N/A                          |
| #16          | .088 - .145<br>(2.24 - 3.68)     | .053 - .120<br>(1.35 - 3.05) |
| #12          | .134 - .170<br>(3.40 - 4.32)     | .097 - .158<br>(2.46 - 4.01) |
| #8           | .190 - .240<br>(4.83 - 6.10)     | N/A                          |
| #4           | .280 - .292<br>(7.11 - 7.42)     | N/A                          |



## STAMPED AND FORMED

Deutsch Stamped and Formed contacts are designed for use where wire termination costs are of primary concern without sacrificing reliability of electrical circuits.

## DESIGN AND MATERIALS SELECTION

Deutsch engineers have combined the process of superior material selection with outstanding mechanical Cad-Cam Designs to present stamped and formed contacts that exceed the demands of today's truck and off-highway electrical systems.

The selection of copper alloys, finished after forming with nickel plating provides superior durability, performance, corrosion and oxidation resistance.

To achieve air-tight crimps that eliminate the need to solder after wire terminations, Deutsch engineers have specified that the core-wing ends be formed in the direction of the crimp, thus assuring resistance to crimp relaxation and displacement of metal, crimp after crimp.

Deutsch socket tines are protected by a closed entry stainless steel sleeve, to ensure controlled contact pressure for maximum conductivity with minimum surface wear.

In keeping with the Deutsch commitment to total quality, all stamped and formed contacts are manufactured using SPC controls and are subjected to extensive programs of rigid testing, including field performance feedback.

| FEATURES                                    | BENEFITS                                                                                                        |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| Stainless Steel Socket Sleeve               | Provides closed entry design preventing probe damage.                                                           |
| Contact Tines are in Socket Member, Not Pin | Terminal contact points are protected from handling and assembly damage.                                        |
| No Lances / Tangs                           | Contact retention is designed in the connector body, eliminating retention problems during handling and rework. |
| Bullet (rounded) Pin Nose                   | Prevents mismatching and bent pins.                                                                             |
| Nickel Plating                              | Reduces oxidations, thus improving conductivity performance.                                                    |
| Plated After Forming                        | No base metal is exposed to corrosion.                                                                          |
| Optional Gold Plating                       | Available for dry circuit application.                                                                          |
| No Individual Wire Seal Grommets            | Wire seals are designed as an integral component of the connector, thus reducing wire terminating costs.        |
| Pre-Bent or Compound Arch Core Wings        | Provides an air-tight crimp joint.                                                                              |
| Improved Die Stop Gap                       | Allows application die to position wire for proper crimp length.                                                |
| Off-Set Configuration                       | Provides center wire alignment between conductor and insulation.                                                |
| Copper Alloy Materials                      | Prevents material relaxation over time, providing reliable crimp joints and increased durability.               |

## Stamped & Formed Contacts

| SIZE | STAMPED & FORMED CONTACT PART NUMBERS |              | CARRIER STRIP IDENTIFICATION | WIRE SIZE AWG (mm <sup>2</sup> ) | WIRE INSULATION O.D. RANGE   | RECOMMENDED STRIP LENGTH INCHES (mm) | MIN CONT. RETENTION LBS (N) | MAX RATED AMPS AT 125°C CONTINUOUS |
|------|---------------------------------------|--------------|------------------------------|----------------------------------|------------------------------|--------------------------------------|-----------------------------|------------------------------------|
|      | PIN                                   | SOCKET       |                              |                                  |                              |                                      |                             |                                    |
| 20   | 1060-20-01**                          | 1062-20-01** | 20 - 01                      | 16 - 22<br>(1.5 - 0.35)          | .075 - .125<br>(1.91 - 3.15) | .150 - .200<br>(3.81 - 5.08)         | 20<br>(89)                  | 7.5                                |
| 20   | 1060-20-02**                          | 1062-20-02** | 20 - 02                      | 16 - 22<br>(1.5 - 0.35)          | .051 - .085<br>(1.30 - 2.16) | .150 - .200<br>(3.81 - 5.08)         | 20<br>(89)                  | 7.5                                |
| 20   | N/A                                   | 1062-20-03** | 20 - 03                      | 16 - 22<br>(1.5 - 0.35)          | .075 - .125<br>(1.91 - 3.15) | .150 - .200<br>(3.81 - 5.08)         | 20<br>(89)                  | 7.5                                |
| 20   | 1060-20-06**                          | 1062-20-06** | 20 - 06                      | 14 - 16<br>(2.5 - 1.0)           | .075 - .125<br>(1.91 - 3.15) | .150 - .200<br>(3.81 - 5.08)         | 20<br>(89)                  | 7.5                                |
| 16   | 1060-14-01**                          | 1062-14-01** | 14 - 16                      | 14 - 18<br>(2.0 - .75)           | .095 - .150<br>(2.41 - 3.81) | .150 - .200<br>(3.81 - 5.08)         | 25<br>(111)                 | 13                                 |
| 16   | 1060-14-10**                          | 1062-14-10** | 14 - 16                      | 14 - 16<br>(2.0 - .75)           | .095 - .150<br>(2.41 - 3.81) | .150 - .200<br>(3.81 - 5.08)         | 25<br>(111)                 | 13                                 |
| 16   | 1060-16-01**                          | 1062-16-01** | 16 - 18                      | 14 - 18<br>(2.0 - .75)           | .075 - .140<br>(1.91 - 3.55) | .150 - .200<br>(3.81 - 5.08)         | 25<br>(111)                 | 13                                 |
| 16   | 1060-16-06**                          | 1062-16-06** | 0.5 - 1.0                    | 16 - 20<br>(1.0 - 0.50)          | .055 - .100<br>(1.40 - 2.54) | .150 - .200<br>(3.81 - 5.08)         | 25<br>(111)                 | 13                                 |
| 16   | 1060-16-07**                          | 1062-16-07** | 0.75 - 2.0                   | 14 - 18<br>(2.0 - .75)           | .075 - .140<br>(1.91 - 3.55) | .150 - .200<br>(3.81 - 5.08)         | 25<br>(111)                 | 13                                 |
| 16   | 1060-16-09**                          | 1062-16-09** | 16 - 18                      | 14 - 18<br>(2.0 - .75)           | .075 - .140<br>(1.91 - 3.55) | .150 - .200<br>(3.81 - 5.08)         | 25<br>(111)                 | 13                                 |
| 16   | 1060-16-12**                          | 1062-16-12** | 1.0 - 2.5                    | 12 - 16<br>(2.5 - 1.0)           | .075 - .140<br>(1.91 - 3.55) | .175 - .225<br>(4.45 - 5.72)         | 25<br>(111)                 | 13                                 |
| 16   | N/A                                   | 1062-16-14** | 14 - 16                      | 12 - 16<br>(2.5 - 1.0)           | .075 - .140<br>(1.91 - 3.55) | .175 - .225<br>(4.45 - 5.72)         | 25<br>(111)                 | 13                                 |
| 12   | 1060-12-01**                          | 1062-12-01** | 12 - 14                      | 12 - 14<br>(4.0 - 2.0)           | .113 - .176<br>(2.87 - 4.47) | .225 - .275<br>(5.72 - 6.99)         | 30<br>(134)                 | 25                                 |
| 12   | 1060-12-02**                          | 1062-12-02** | 10 - 12                      | 10 - 12<br>(6.0 - 4.0)           | .140 - .204<br>(3.56 - 5.18) | .225 - .275<br>(5.72 - 6.99)         | 30<br>(134)                 | 25                                 |

\*\* = Plating Codes Consult factory for custom finish needs.

For 12 Size, see 0425-041-0000 and 0425-208-0000

For 16 Size, see 0425-039-0000, 0425-059-0000, and 0425-203-0000

For 20 Size, see 0425-059-0000 and 0425-207-0000



## CONTACTS AND APPLICATION DATA

### Solid Contacts

| SIZE | SOLID CONTACT PART NUMBERS |               | WIRE SIZE<br>AWG (mm <sup>2</sup> ) | RECOMMENDED<br>STRIP LENGTH<br>INCHES (mm) | MIN CONTACT<br>RETENTION<br>LBS (N) | REF CRIMP<br>TENSILE<br>LBS (N) | MAX RATED<br>AMPS AT 125°C<br>CONTINUOUS | * |
|------|----------------------------|---------------|-------------------------------------|--------------------------------------------|-------------------------------------|---------------------------------|------------------------------------------|---|
|      | PIN                        | SOCKET        |                                     |                                            |                                     |                                 |                                          |   |
| 20   | 0460-202-20**              | 0462-201-20** | 20<br>(0.50)                        | .156-.218<br>(3.96 - 5.54)                 | 20<br>(89)                          | 20<br>(89)                      | 7.5                                      |   |
| 20   | 0460-010-20**              | 0462-005-20** | 16-18<br>(1.0 - 0.75)               | .156-.218<br>(3.96 - 5.54)                 | 20<br>(89)                          | 20<br>(89)                      | 7.5                                      |   |
| 16   | 0460-202-16**              | 0462-201-16** | 16-20<br>(1.0 - 0.50)               | .250 - .312<br>(6.35 - 7.92)               | 25<br>(111)                         | 35-20<br>(156-89)               | 13                                       |   |
| 16   | 0460-215-16**              | 0462-209-16** | 14<br>(2.0)                         | .250 - .312<br>(6.35 - 7.92)               | 25<br>(111)                         | 70<br>(311)                     | 13                                       |   |
| 12   | 0460-204-12**              | 0462-203-12** | 12-14<br>(3.0 - 2.0)                | .222 - .284<br>(5.64 - 7.21)               | 30<br>(134)                         | 75-70<br>(334 - 311)            | 25                                       |   |
| 8    | 0460-204-08**              | 0462-203-08** | 8-10<br>(8.0 - 5.0)                 | .430 - .492<br>(10.92 - 12.50)             | 35<br>(156)                         | 125-90<br>(556-400)             | 60                                       |   |
| 4    | 0460-204-04**              | 0462-203-04** | 6<br>(13.0)                         | .430-.492<br>(10.92-12.50)                 | 35<br>(156)                         | 300<br>(1334)                   | 100                                      |   |

\* See Information Drawing 0425-205-0000. Consult factory for alternate finishes.

\* Deutsch can only warrant electrical performance when proper parts, procedures and tooling from approved Crimp Termination Information Drawings are Used.

## SOLID CONTACTS

### Universal Hand Crimp tool


#### HDT - 48 - 00

For size 20, 16 & 12 contacts



- 1) Strip specified length of insulation from wire
- 2) Raise selector knob and rotate until arrow is aligned with wire size to be crimped.
- 3) Loosen lock nut, turn adjusting screw in until it stops.

- 4) Insert contact, turn adjusting screw counter clockwise out until contact is flush with indenter cover. Tighten lock nut.

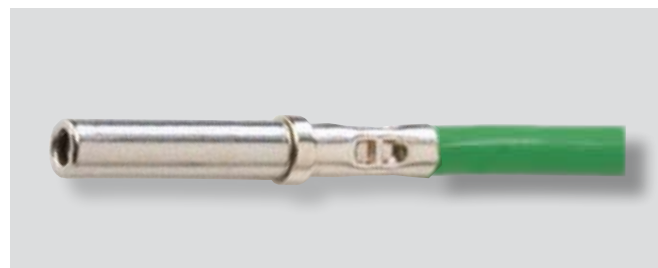

- 5) Insert wire in contact, contact must be centered between indenters, close handles until handle contacts the stop.
- 6) Release handles and remove crimped contact.

- 7) Inspect terminal to insure that all strands are in crimp barrel.

Note; tool must be readjusted for each type/size of contact or wire.



## "Field Maintenance" Hand Crimp Tools



### **HDT - 48 - 00**

For size 20, 16 & 12 solid contacts

### **HDT - 04 - 08**

For size 4 & 8 contacts  
Field repair tool only. Not for  
production use.



## Production Crimp Tools



### **Power Crimp Equipment**

#### **HDP - 400**

For size 4, 8, 12, 16 & 20 solid contacts



### **Automatic Crimp Equipment**

**HD16** - P/S accommodates 16 contacts

**HD12** - P/S accommodates size 12 contacts

**HD12-16** P/S accommodates size 16 & 12 contacts

Consult factory for availability and sources




## CRIMPING

### WIRE STRIPPING



## CRIMP INSPECTION

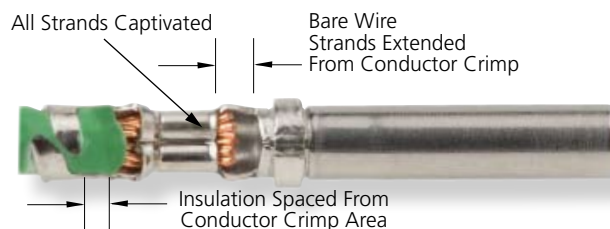

For crimp configuration refer to drawing 0425-2\*\*-0000

## HAND CRIMP TOOLING



### HAND TOOL

Field Maintenance


Ratched design for full cycle crimp reliability

DTT - 12 - 00  
DTT - 12 - 01  
DTT - 16 - 00  
DTT - 16 - 01  
DTT - 16 - 02  
DTT - 20 - 00  
DTT - 20 - 02  
DTT - 20 - 03

\*See information drawing for proper tool.

\*Deutsch can only warrant electrical performance when proper parts, procedures and tooling from approved Crimp Termination Information Drawings are used.

## APPLICATION DIES

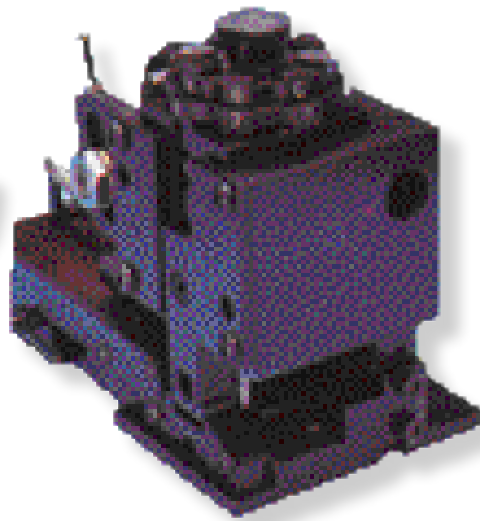

### FITS ALL STANDARD PRESSES

DCT12 - 02 - 00  
DCT12 - 02 - 01  
DCT16 - 02 - 00  
DCT16 - 02 - 01  
DCT1620 - 02 - 00  
DCT20 - 02 - 00

Consult factory for further application information.



## Hand Crimping Instructions for Stamped Contacts



1. Cycle the hand tool to the open position.
2. While pressing upward on the locator spring, insert the contact with the tails upward completely into the locator.



3. When correctly positioned, the contact should be located beyond flush with the edge of the hand tool and positioned on the concave polished split level crimp areas.



4. Insert the prestripped wire into the crimp area of the contact and completely cycle the tool.



5. While pressing upward on the locator spring withdraw the crimped termination.



6. The result will be a perfect termination.
7. Note that there are no unterminated wire strands, and that some strand ends can be seen at the forward edge of the crimp. Also note the insulation is gripped by the smaller secondary crimp. Distortion is at a minimum.



## P.C.B. Pins

In many electronic module designs, the use of removable contacts provides solutions of design flexibility and reduced costs. Deutsch Industrial has available a complete line of straight-reduced diameter extended pins that may be installed in any of the Deutsch family of field serviceable connectors. These solid copper alloy pins may be specified in various platings and assembled in HD30, HDP20, HD10, DRC or DT receptacles. By utilizing the tooled and readily available insert arrangements of these five connector series, the electronic designer is provided a low cost alternative to meet his application needs. Consult the Deutsch Industrial series catalogs for a complete review of connector types and insert arrangements offered.

### Material

Copper alloy


### Plating

90: Tin


31: Gold

### P.C.B. Mounting


Consult factory for P.C.B. mounting details and pin positions.

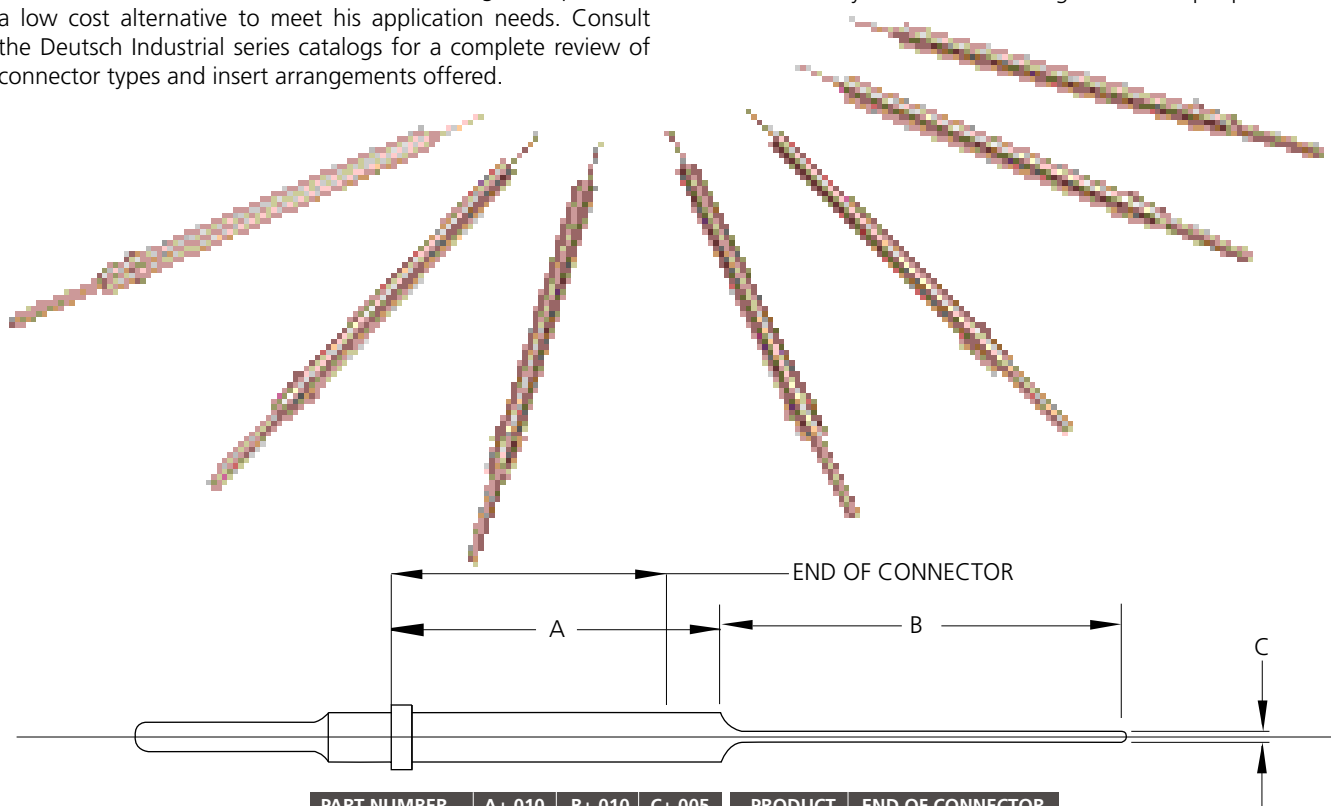


| PART NUMBER   | A+.010 | B+.010 | C+.005 | PRODUCT | END OF CONNECTOR |
|---------------|--------|--------|--------|---------|------------------|
| 0460-208-16** | 1.300  | .248   | .025   | HD30    | .939             |
| 0460-229-16** | .545   | .248   | .025   | HD10    | .925             |
| 0460-238-12** | .714   | .549   | .043   | DT      | .777             |
| 0460-241-16** | 1.305  | .160   | .040   | DT04-2P | .677             |
| 0460-245-16** | .976   | .400   | .041   | DT04-3P | .677             |
| 0460-245-12** | 1.024  | .500   | .041   | DRC     | 1.063            |
| 0460-257-16** | .793   | .248   | .025   |         |                  |
| 0460-208-12** | 1.305  | .248   | .025   |         |                  |
| 0460-263-16** | 1.305  | .248   | .093   |         |                  |



11 HD10 Series



HDP20 Series

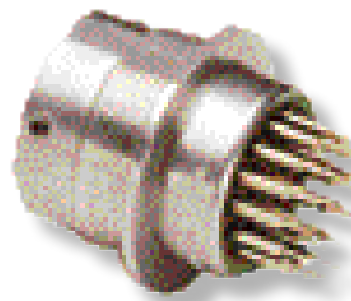

HD30 Series



## Contact Glossary

**AWG American Wire Gauge** - Reference National Bureau of Standards Copper Wire Table (Handbook 100) AVS.

**Barrel** - (1) Conductor barrel: the section of the terminal, splice or contact that accommodates the stripped conductor, or (2) Insulation barrel: The section of the terminal splice or contact that accommodates the conductor insulation.

**Barrel Chamber** - The bevel at the end of the conductor barrel providing for easier entry.

**Belled Mouth (bellmouth)** - The flared or wide entrance of a terminal, splice or contact barrel to permit easier insertion of the conductor.

**Bifurcated Contact** - Describes lengthwise slotting of a flat spring contact as used in a printed circuit edge connector.

**Circumferential Crimp** - The type of crimp where the crimping dies completely surround a barrel resulting in symmetrical indentations in the barrel.

**Closed Entry** - A contact or a contact cavity design in the insert or body of the termination assembly which limits the size and position of the mating contact or printed circuit board to a predetermined dimension.

**Contact** - The conductive element in a termination assembly which mates with a corresponding element for the purpose of transferring electrical energy.

**Contact, Bellows** - A contact in which a multileaf spring is folded. This provides more uniform spring rate over the full tolerance range of the mating unit.

**Contact, Crimp** - A contact whose conductor barrel is a hollow cylinder accepting the conductor. After a bared conductor is inserted, a crimping tool is applied to swage or form the contact metal firmly against the conductor. An excellent mechanical and electrical contact results. Often referred to as a solderless contact.

**Contact, Dressed** - A contact with a permanently attached contact retaining member.

**Contact, Female** - A contact into which the mating contact is inserted. Similar in function to a socket contact.

**Contact, Fixed** - A contact permanently included in the insert material. It is mechanically locked, cemented or embedded in the insert.

**Contact, Insertable / Removable** - A contact that can be mechanically joined to or removed from an insert. Usually special tools lock the contact in place or remove it for repair or replacement.

**Contact, Male** - A contact of design to make contact by insertion into a mating contact. Similar in function to a pin contact.

**Contact, Nude** - A contact with a contact retainer that remains in the insert at all times.

**Contact, Open Entry** - A socket whose engaging end is split and therefore vulnerable to distortion or damage from test probes or other wedging devices.

**Contact, Pin** - Male-type contact designed to fit inside the mating female contact member.

**Contact, Sheet-Metal** - Contacts made by stamping and bending sheet metal rather than by the machining of metal stock.

**Contact, Socket** - A female-type contact (usually completely surrounded by insert material).

**Contact, Solder** - A contact which has a cup, hollow-cylinder eyelet or hook to accept a conductor and retain the applied solder.

**Contact Area** - The area in contact between two conductors, two contacts or a conductor and a contact permitting the flow of electricity.

**Contact Arrangement** - The number, spacing and arrangement of contacts in a termination assembly.

**Contact Engaging and Separating Force** - Force needed to either engage or separate mating contacts.

**Contact Float** - The overall side play and/or angular displacement of contacts within the insert cavity.

**Contact Inspection Hole** - A hole in the cylindrical rear portion of contact used to check the depth to which a conductor has been inserted. Crimp-type contacts usually have inspection holes; solder-types seldom do, except larger sizes in which the hole's function is to allow solder and air to bleed out during soldering.

**Contact Resistance** - Electrical resistance of a pair of engaged contacts. Resistance may be measured in ohms or millivolt drop at a specified current over the engaged contacts.

**Contact Retainer** - A device either on the contact or in the insert to retain the contact in an insert or body.

**Contact Retention** - The axial load in either direction which a contact can withstand without being dislodged from its normal position within an insert or body.

**Contact Shoulder** - The flanged portion of the contact which limits its travel into the insert.

**Contact Size** - An assigned number denoting the size of the contact.



**Contact Spacing** - The spacing between the centers of contacts within an insert.

**Contact Spring** - The spring placed inside the socket-type contact to force the pin into position of positive intimate contact. Depending on the application, various types are used, including leaf, cantilever, napkin, ring, squirrel cage and "Chinese-finger" springs. All perform the function of wiping and establishing good contact. Various metal alloys are used. For example, beryllium copper is used where high conductivity and long life are required. Stainless steel, while its conductivity is only about two percent is used in high temperature applications.

**Contact Wipe** - The distance of travel (electrical engagement) made by one contact with another during its engagement or separation or during mating or unmating of the connector halves.

**Crimp** - The physical compression (deformation) of a contact barrel around a conductor to make an electrical and mechanical connection to the conductor.

**Crimping** - a pressure method of mechanically securing a terminal, splice or contact to a conductor.

**Crimping Die** - Portion of the crimping tool that shapes the crimp.

**Crimp Tool** - Mechanism used for crimping.

**Engaging and Separating Force** - Force required to either engage or separate mating contacts or connectors.

**Extraction Tool** - A device used for extracting removable contacts from a termination assembly.

**Flag Terminal** - Terminal having a tongue protruding from the side of the barrel.

**Flange Spade Terminal** - A terminal whose tongue edges are turned at an angle to the plane of the tongue.

**Grid Spaced** - The arrangement of contacts in a multiple contact termination assembly by spacing in a geometric pattern.

**Hermaphroditic Contact** - A contact design which is neither pin nor socket and which mates with another contact of the same design. The contacts may be arraigned as male and female contacts as for pins and sockets. Hermaphroditic contacts may also be used in a manner such that one half of each contact mating surface protrudes beyond the connector interface and both mating connectors are identical.

**Hook Terminal** - Terminal with a hook-shaped tongue.

**Indenter** - That part of a crimping die, usually the moving part, which indents or compresses the contact barrel.

**Insertion Tool** - (1) A device used to insert contacts into a connector or junction. (2) A device used to insert taper pins into taper pin receptacles.

**Inspection Hole** - A hole placed at one end of a barrel to permit visual inspection to see that the conductor has been inserted to the proper depth in the barrel prior to crimping. (See Contact Inspection Hole.)

**Insulated Terminal** - Terminal having its barrel and insulation support or grip, if used, covered with a dielectric material.

**Insulation Crimp** - (1) The physical deformation of an insulation sleeve covering a terminal or splice and the adjacent conductor insulation to hold the sleeve in place (2) Shape combination of insulation sleeve to terminal or splice and conductor insulation after crimping.

**Insulation Grip** - The portion of the barrel which is closed or compressed around the conductor insulation.

**Insulation Piercing Terminal** - A terminal with a device which punctures the insulation of the conductor and makes contact with or enters into the conductor.

**Insulation Support** - The portion of the barrel corresponding to an insulation grip except that it is not compressed around the conductor insulation.

**mm2 "millimeters squared"** - European Wire Size Standards (ref. DIN 72551-6 and ISO 6722-3).

**Maximum Conductor Operating Temperature (MCOT)** - Ambient temperature plus temperature rise due to passage of electric current.

**Nest** - The portion of a crimping die which supports the barrel during crimping.

**Offset Terminal** - Terminal whose tongue is forward of, and whose stud hole is offset from, centerline of terminal barrel.

**Plating** - The overlaying of a thin coating of metal on components to improve conductivity, provide for easy soldering, and prevent rusting or corrosion.

**Pre-Tinned** - Solder applied to either or both the contact and conductor prior to soldering.

**Pull-Out Force** - Force necessary to separate a conductor from a contact or terminal, or a contact from a termination assembly, by exerting a pull along the axis of the conductor and the termination.

**Range, Wire** - The sizes of conductors accommodated by a particular barrel. Also the diameters of insulated conductors accommodated by a sealing grommet.



# Common Contact System Technical Manual

**Ratchet Control** - A device to ensure the full crimping cycle of crimping tools.

**Sealing Plug** - A plug which is inserted to fill an unoccupied contact aperture in a termination assembly. Its function is to seal all unoccupied apertures in the assembly, especially in environmental connectors or junctions.

**Seamless Terminal or Splice** - Terminal or splice conductor barrel made without an open seam.

**Serration** - Deformation of the inside surface of a conductor barrel to provide better gripping of the conductor or on the outside of the conductor body to provide better gripping of the conductor.

**Service Rating** - The maximum voltage or current which a termination is designed to carry continuously.

**Socket Contact Sleeve** - A sleeve that holds the contact spring in the correct position within the socket contact and provides a smooth exterior surface.

**Solderless Connection** - The joining of two metals by pressure without the use of solder, braze or any method requiring heat.

**Strand** - A single uninsulated wire.

**Strip** - To remove insulation from a connector.

**Swedging** - A term for crimping.

**Taper Pin** - A pin-type terminal having a tapered end designed to be impacted into a tapered female terminal.

**Temperature Coefficient of Resistivity** - The change in resistance (electrical) per degree change in temperature. (It is usually signified by the symbol for alpha.)

**Terminal** - A device designed to terminate a conductor in order to establish electrical connection.


**Wiping Action** - (See Contact Wipe.) Action of two electrical contacts which come in contact by sliding against each other.



Deutsch Industrial UK  
Stanier Road  
St. Leonards On Sea  
East Sussex TN 38 9RF  
England  
Ph. 44 (0) 1424 852 722  
Fax 44 (0) 1424 855 979  
industrialuk@deutsch.net

Deutsch Industrial Europe  
Fraunhoferstrasse 11b  
82152 Martinsried  
Germany  
Ph. +49 (0) 89 899157-0  
Fax +49 (0) 89 857 4684  
info.eu@deutsch.net

Deutsch Connectors Trading  
(Shanghai) Co., Ltd.  
Room 1032, 10F Central Plaza,  
381 Huai Hai Zhong Road,  
Shanghai 200020, China  
Tel/Fax: 86-21-6391 5902  
E-mail: salesdichina@deutsch.net

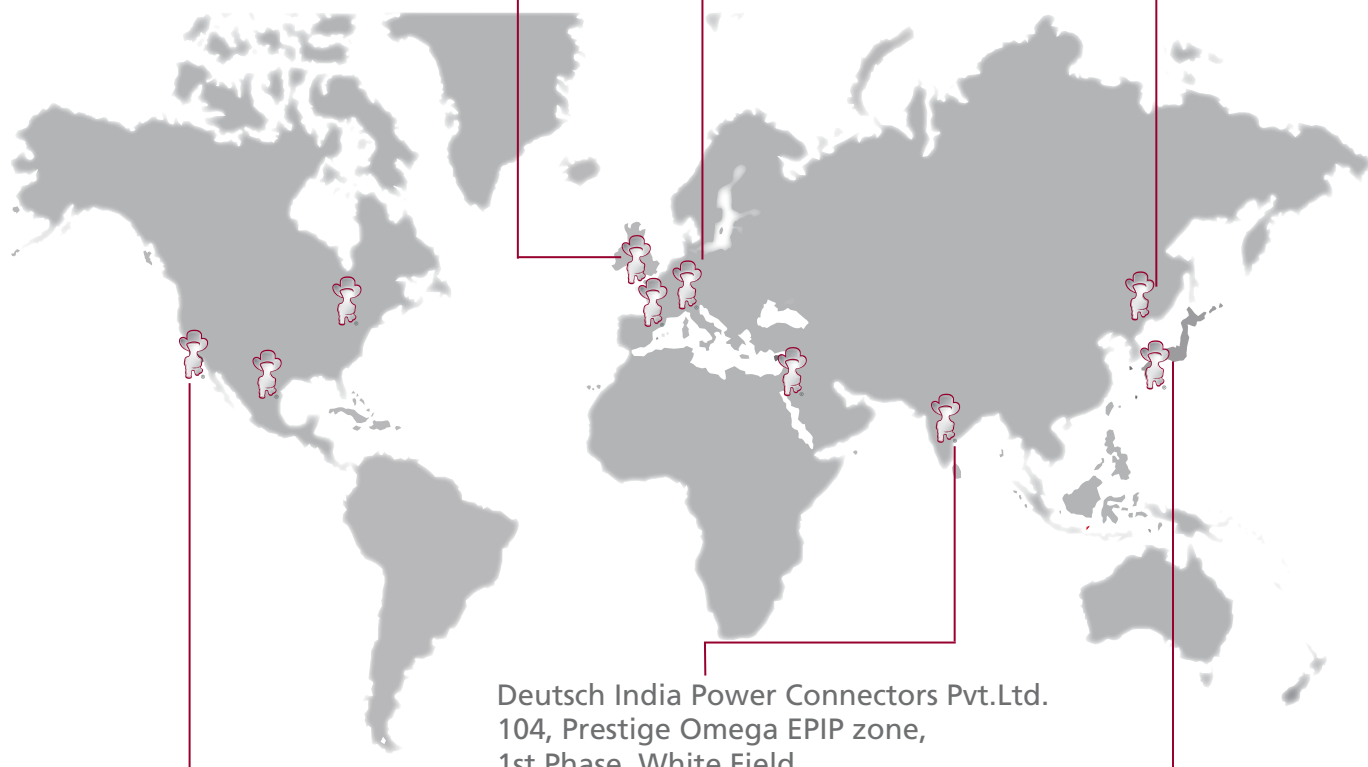

Deutsch Industrial US  
3850 Industrial Ave.  
Hemet, CA 92545  
USA  
Ph. +1 (951) 765-2250  
Fax +1 (951) 765-2255  
insidesales-ipd@deutsch.net

Deutsch India Power Connectors Pvt.Ltd.  
104, Prestige Omega EPIP zone,  
1st Phase, White Field,  
Bangalore - 560 066.  
INDIA.  
Ph: +91 80 40466525  
Mobile: +91 98454 03301

Deutsch Industrial Japan  
NIHON Deutsch Ltd.  
44-10, Ohyamakanai-cho  
Itabashi-ku, Tokyo 173-0024  
Japan  
Ph. + 81-3-5995-5192  
Fax + 81-305995-5193  
rtakemura@nihon-deutsch.co.jp



DEUTSCH  
INDUSTRIAL

3850 Industrial Avenue, Hemet, California 92545 Tel.: (951) 765-2250 - Fax: (951) 765-2255  
Web: www.deutsch.net - Edition 01/2009

A STEP AHEAD



# Tooling

## Contents

|                       |            |
|-----------------------|------------|
| Tooling Overview      | PG 132     |
| Benefits of Crimping  | PG 132     |
| Crimp Inspection      | PG 132     |
| Automated Tooling     | PG 133-134 |
| Hand Tools            | PG 135-136 |
| Removal Tools         | PG 137-137 |
| Series Specific Tools | PG 138-139 |

## How To Instructions

PG 139-141



## Tooling Overview

Deutsch Industrial manufactures two types of contacts, solid and stamped & formed. Both styles of contacts are designed for crimp style terminations, no solder is required or recommended. A crimp style termination displaces the wire strands creating a superior bond between the wire and the contact.


Deutsch offers several types of tools to assist with hand and production wire crimping, wire insertion and removal and wedgelock/terminal position assurance removal. The tools are specific to the solid contacts or the stamped & formed contacts. To ensure a proper crimp and achieve the highest performance specifications, Deutsch contacts must be crimped with Deutsch tooling. Deutsch can only warrant electrical performance when proper parts, procedures, and tooling are used.

### ■ Benefits of Crimping


Mechanically crimping contacts is the dominant wire termination method, for some very good reasons:

1. Since no wet process is involved, corrosion is not a problem. No adhesive, flux, or additives are used.
2. Strength, accuracy and overall reliability of a crimped contact are controlled by the crimp tool, not the operator. The field tools (except size 4 solid style) release the contact only after the full crimping cycle is completed.
3. The crimp tool is universal, accepts both pins and sockets of many sizes.
4. Crimping can be done anywhere, without special preparation. Terminations are replaced or modified in the field exactly the same as in the shop, using the same tools and the same techniques, and with the same ease of operation and certainty of results.
5. Total installed and maintenance costs are lower.

### ■ Solid Contact Crimp Inspection

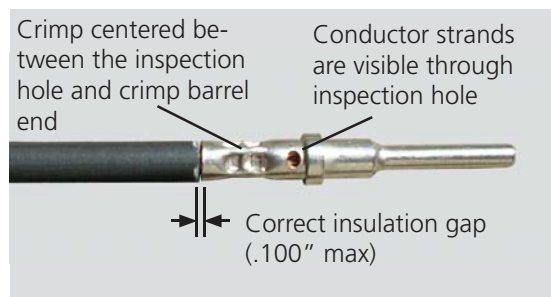


Acceptable Crimp

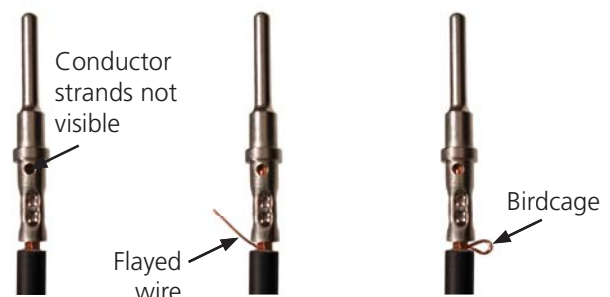


Unacceptable Crimps

### ■ Stamped & Formed Contact Crimp Inspection

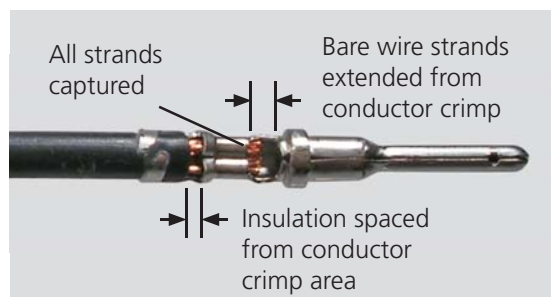

Acceptable Crimp

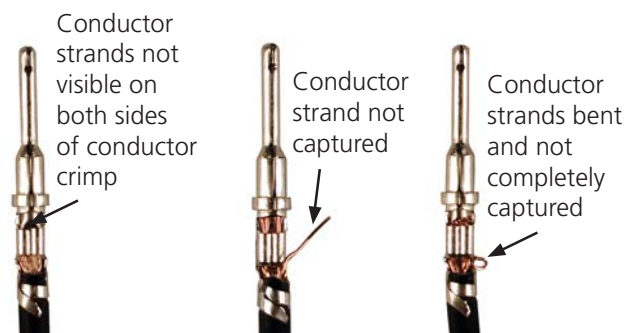

Unacceptable Crimps

## Automated Tooling Overview

For higher production volumes, Deutsch offers a pneumatic power crimp tool for the solid contacts, and applicator dies for stamped & formed contacts. The HDP-400, the pneumatic solid crimp tool, is a fast, bench-top tool that crimps all of the contacts in the Deutsch Industrial Common Contact System. The HDP-400 has a foot control, and easy-to-change dies and locators for each contact size. Deutsch's stamped & formed applicator dies are heavy duty mini-dies that work in many industry standard presses. Deutsch's applicator dies offer simple adjustments and the flexibility to accept different sized Deutsch contacts and wire gauge.

### ■ Automated Tooling for Solid Contacts



| Tool P/N | Contact Size | Contact Part Number                                              |
|----------|--------------|------------------------------------------------------------------|
| HDP-400  | 4            | 0460-204-0490<br>0462-203-04141                                  |
|          | 8            | 0460-204-08141<br>0462-203-08141                                 |
|          | 12           | 0460-204-12**<br>0460-203-12**                                   |
|          | 16           | 0460-202-16**<br>0462-201-16**<br>0460-215-16**<br>0462-209-16** |
|          | 20           | 0460-202-20**<br>0462-201-20**                                   |
|          |              |                                                                  |
|          |              |                                                                  |
|          |              |                                                                  |
|          |              |                                                                  |
|          |              |                                                                  |

### ■ HDP-400 Tooling Accessories



#### Go-No-Go Gauges

| Part Number  | Go-No-Go Gauges |
|--------------|-----------------|
| GA20N        | HDP-400 Size 20 |
| 450GA-16N    | HDP-400 Size 16 |
| 450GA-12N    | HDP-400 Size 12 |
| GA8-SPEC     | HDP-400 Size 8  |
| 450GA-4-SPEC | HDP-400 Size 4  |



#### HDP-400 Dies and Locators

| Crimp Tool Part Number | Drawing Number Reference |
|------------------------|--------------------------|
| HDP-400                | 0425-205-0000            |



## ■ Automated Tooling for S&F Contacts

| Tool P/N      | Contact Size | Contact Part Number |
|---------------|--------------|---------------------|
| DCT12-02-00   | 12           | 1060-12-01**        |
| DCT12-02-01   |              | 1062-12-01**        |
| DCT16-02-00   | 16           | 1060-16-01**        |
| DCT1620-02-00 |              | 1062-16-01**        |
| DCT20-02-00   | 20           | 1060-16-06**        |
| DCT1620-02-00 |              | 1062-16-06**        |
|               |              | 1060-20-01**        |
|               |              | 1062-20-01**        |



## ■ DCT Tooling Accessories



### Bolster plate for mounting Deutsch DCT applicators to AMP K press

| Part Number       | Bolster Plate Accessories |
|-------------------|---------------------------|
| BOLSTER PLATE     | Bolster Plate             |
| BOLSTER PLATE BAR | Bolster Plate Bar         |
| BOLSTER PLT CLAMP | Bolster Plate Clamp       |



### Oiler for DCT Series applicators

| Part Number | Oiler Accessories  |
|-------------|--------------------|
| 20000082    | Oiler Unit         |
| E807        | Terminal Lubricant |



### DCT Applicator Punches and Anvils

| Applicator Part Number | Drawing Number Reference |
|------------------------|--------------------------|
| DCT12-02-00            | 0425-208-0000            |
| DCT12-02-01            | 0425-041-0000            |
| DCT16-02-00            | 0425-203-0000            |
| DCT1620-02-00          | 0425-059-0000            |
| DCT20-02-00            | 0425-207-0000            |

## Hand Tool Overview

For field service, prototype, and low-volume production, Deutsch offers several easy-to-use hand crimp tools for both solid barrel and stamped & formed contacts. All Deutsch hand crimp tools provide a tight, complete crimp with minimal effort. The HDT-48-00, the most commonly used tool for solid contacts, crimps a wide range of contact sizes with no need to change out dies or locators. It provides a symmetrical four indent crimp, is compact and easy-to-use for field service, yet sturdy and reliable enough for low volume production. Hand crimp tools for stamped & formed contacts are wire gauge specific and simultaneously crimp the insulation and conductor, saving time and effort during field service.

### ■ Hand Tools for Solid Contacts



HDT-04-08



HDT-48-00



HDT-50-00



HDT-1561

| Contact Size | Contact Part Number                                              | Tool Part Number | Crimp Type        |
|--------------|------------------------------------------------------------------|------------------|-------------------|
| 4            | 0460-204-0490<br>0462-203-04141                                  | HDT-04-08        | Two Indent Crimp  |
| 8            | 0460-204-08141<br>0462-203-08141                                 | HDT-04-08        | Two Indent Crimp  |
| 12           | 0460-204-12**<br>0460-203-12**                                   | HDT-48-00        | Four Indent Crimp |
|              |                                                                  | HDT-1561         | Two Indent Crimp  |
|              |                                                                  | HDT-50-00        | One Indent Crimp  |
| 16           | 0460-202-16**<br>0462-201-16**<br>0460-215-16**<br>0462-209-16** | HDT-48-00        | Four Indent Crimp |
|              |                                                                  | HDT-1561         | Two Indent Crimp  |
|              |                                                                  | HDT-50-00        | One Indent Crimp  |
| 20           | 0460-202-20**<br>0462-201-20**                                   | HDT-48-00        | Four Indent Crimp |
|              |                                                                  | HDT-1561         | Two Indent Crimp  |
|              |                                                                  | HDT-50-00        | One Indent Crimp  |

### ■ HDT-48-00 Hand Tool Accessories



#### HDT-48-00 Adjustment Screw and Locking Nut

| Part Number   | Crimp Tool Replacement Part      |
|---------------|----------------------------------|
| 0426-209-0000 | Adjustment Screw and Locking Nut |
| M2700-395-10  | Locking Nut                      |




Go no go gauges are used to inspect crimp tooling. The G454 gauge is used with the HDT-48-00 hand tool.



#### Go-No-Go Gauge

| Part Number | Description              |
|-------------|--------------------------|
| G454        | HDT-48-00 Go-No-Go Gauge |

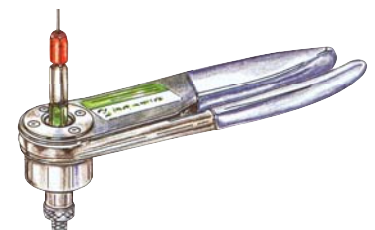



## ■ Hand Tools for Stamped & Formed Contacts



DTT-12-00



DTT-12-01




DTT-16-00  
DTT-16-01  
DTT-20-00  
DTT-20-02

| Contact Size | Contact Part Number | Tool Part Number         |
|--------------|---------------------|--------------------------|
| 12           | 1060-12-01**        | DTT-12-00                |
|              | 1062-12-01**        |                          |
|              | 1060-12-02**        | DTT-12-01                |
|              | 1062-12-02**        |                          |
| 16           | 1060-16-01**        | DTT-16-00<br>(14-16 AWG) |
|              | 1062-16-01**        | DTT-16-01<br>(18 AWG)    |
|              | 1060-16-06**        |                          |
|              | 1062-16-06**        |                          |
| 20           | 1060-20-01**        | DTT-20-00                |
|              | 1062-20-01**        |                          |
|              | 1060-20-02**        | DTT-20-02                |
|              | 1062-20-02**        |                          |

## ■ DT/RT1

The DT/RT1 is a multi-use tool with a small hook on one end to remove the wedgelock, and a small screwdriver on the other end to push back the locking fingers and release the contact. The DT/RT1 is a helpful tool for the DT, DTM, DTP, DTV, DRB, and STRIKE series of connectors.




## ■ Removal Tools

Deutsch Industrial removal tools are designed to simplify contact removal and field service repair in all connectors that utilize a round shoulder contact retention system. Removal tools are compact, easy-to-use, and manufactured of heavy duty plastic to remove contacts without damage to the wire, insulation, connector seals, or connector body. The removal tools are required for wire removal in the DTHD, Jiffy Splices, HD10, HDP20, HD30, DRC, AEC, and WT Series.

| Removal Tool                                                                        | Part Number   | Contact Size         | Wire Gauge Range                         | Color             |
|-------------------------------------------------------------------------------------|---------------|----------------------|------------------------------------------|-------------------|
|    | 0411-027-0405 | Size 4               | 4 AWG                                    | Black             |
|    | 114009        | Size 4               | 6 AWG                                    | White             |
|    | 114008        | Size 8               | 8-10 AWG                                 | Green             |
|    | 0411-353-0805 | Size 8<br>for HD Box | 8-10 AWG                                 | Green<br>Extended |
|   | 114010        | Size 12              | 12 AWG                                   | Yellow            |
|  | 0411-337-1205 | Size 12              | 12-14 AWG<br>Extra Thin Wall<br>(E-Seal) | Orange            |
|  | 0411-291-1405 | Size 14              | 14-16 AWG                                | Green             |
|  | 0411-310-1605 | Size 16              | 16-18 AWG                                | Light Blue        |
|  | 0411-336-1605 | Size 16              | 16-18 AWG<br>Extra Thin Wall<br>(E-Seal) | Dark Blue         |
|  | 0411-240-2005 | Size 20              | 20-24 AWG                                | Red               |



*A contact removal tool taped or tie wrapped to the harness will make it easily available should repairs be needed.*

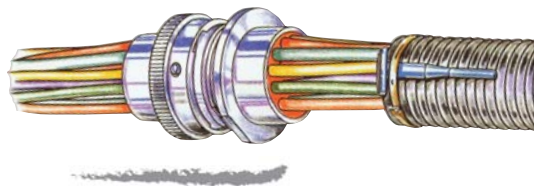

## Series Specific Tools

### ■ Crimp Tools for STRIKE Series

| Contact Size | Contact Style    | Hand Crimp Tool                    | Production Crimp Tool    |
|--------------|------------------|------------------------------------|--------------------------|
| 12-20        | Solid            | HDT-48-00                          | HDP-400                  |
| 12           | Stamped & Formed | DTT-12-00, DTT-12-01               | DCT12-02-00, DCT12-02-01 |
| 16           | Stamped & Formed | DTT-16-00, DTT-16-01,<br>DTT-16-02 | DCT1620-02-00            |
| 20           | Stamped & Formed | DTT-20-00, DTT-20-02               | DCT1620-02-00            |

### ■ Assembly/Removal Tools for STRIKE Series

| Tool                                                                                | Part Number  | Connector           | Description                                                            |
|-------------------------------------------------------------------------------------|--------------|---------------------|------------------------------------------------------------------------|
|   | SRK-RT-02    | Receptacle          | TPA removal tool for receptacles<br>Not for use with 18 cavity insert  |
|  | SRK-RT-02-G2 | Receptacle          | TPA removal tool for receptacles<br>For use with 18 cavity insert      |
|  | SRK-RT-06    | Plug                | TPA removal tool for plugs<br>Not for use with 18 cavity insert        |
|  | SRK-RT-06-G2 | Plug                | TPA removal tool for plugs<br>For use with 18 cavity insert            |
|  | SRK-MT-02    | Receptacle          | TPA mounting tool for receptacles                                      |
|  | SRK-RT-01    | Plug and Receptacle | Field service removal tool (TPA or contacts) for plugs and receptacles |

## ■ Tools for IMC and Quick Connect Series


The Industrial Micro Connect and Quick Connect Series use special contacts and tools. The contacts are smaller and designed for high pin density. Removal tools along with multiple crimp tools are available and are designed to work with the smaller contacts and tighter pin arrangements. The common contact system and tools are not compatible with the IMC or QC Series.

| Tools for Solid Contacts |                                                             |
|--------------------------|-------------------------------------------------------------|
| Part Number              | Adjustable Hand Crimp Tools                                 |
| MH860                    | QC/IMC #22 crimp tool, adjustable AWG ranges, requires 86-5 |
| 86-5                     | QC/IMC crimp tool positioner for MH860                      |
| AF8-TH163                | QC/IMC #20 and #16 crimp tool, adjustable AWG ranges        |
|                          | Single Gauge Hand Crimp Tools                               |
| AMSC22/1                 | QC/IMC #22 crimp tool, low cost, only crimps 22 AWG wire    |
| AMSC20/1                 | QC/IMC #20 crimp tool, low cost, only crimps 20 AWG wire    |
| AMSC16/A/1               | QC/IMC #16 crimp tool, low cost, only crimps 16 AWG wire    |
|                          | Insert/Removal Tools                                        |
| 6757-201-2201            | Insert/Removal Tool #22                                     |
| 6757-201-2001            | Insert/Removal Tool #20                                     |
| 6757-201-1601            | Insert/Removal Tool #16                                     |



## How To Instructions

### ■ Wire Stripping




#### Step 1:

1. Choose the correct AWG for the contact being used.
2. Measure from the end of the wire the recommended strip length according to the contact size.
3. Place the wire into a stripping tool at the recommended strip length. Strip the wire according to stripping tool instructions.



#### Step 2:

1. After stripping, a small piece of the insulation should come off.
2. Check for any broken strands or for a dent in the wire. If either exist, the wire is damaged and should be cut and stripped again.




#### Step 3:

- Measure the exposed strands to be sure the crimp length is correct.



*Leaving the stripped portion of the insulation on the wire until prior to crimping will avoid flayed wire strands.*

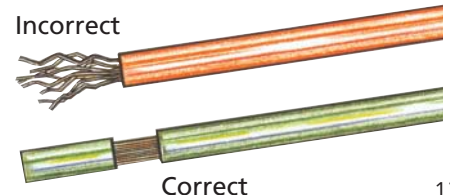



## ■ Crimping with the HDT-48-00 Hand Tool



### Note

Tool must be adjusted for each type/size of contact.



### Step 1:

1. Strip insulation from wire.
2. Raise selector knob and rotate until arrow is aligned with wire size to be crimped.
3. Loosen locknut, turn adjusting screw in until it stops.



### Step 2:

Insert contact with barrel up. Turn adjusting screw counterclockwise until contact is flush with indenter cover. Tighten locknut.



### Step 3:

1. Insert wire into contact. Contact must be centered between indentors. Close handles until crimp cycle is completed.
2. Release handles and remove crimped contact.

## ■ Crimping with DTT Style Hand Tools (size 16 & 20)




### Step 1:

Cycle the hand tool to the open position. Place the contact into the correct die nest.




### Step 2:

Partially close the tool until the contact is held in place.



### Step 3:


Insert the prestripped wire into the crimp area of the contact.



### Step 4:

Close the tool until the ratchet releases. The ratchet is released when a loud click is heard and crimp is complete.


## ■ Crimping with DTT-12-01 Hand Tool



### Step 1:

Cycle handles to release ratchet and fully open crimp jaws. Pull out insulation selector and push into proper diameter using the chart below.

| Wire Type           | Insulation Selector |
|---------------------|---------------------|
| 10 TXL              | .150-.170           |
| 10 GXL              | .160-.180           |
| 10 SXL              | .170-.205           |
| 5.0 mm <sup>2</sup> | .160-.180           |
| 6.0 mm <sup>2</sup> | .170-.205           |



### Step 2:

1. Insert contact into locator. Adjust alignment and width of crimp wings if necessary to ensure capture by crimp jaws.
2. Insert stripped wire into the contact. Close crimp tool until full-cycle ratchet control releases.



## ■ Crimping with DTT-12-00 Hand Tool



### Step 1:

Cycle the tool to release ratchet and open tool. Lift the locator gate, and place the contact into the correct die nest. Adjust alignment of crimp wings to ensure capture by crimp jaws.



### Step 2:

Partially close the tool until the contact is held in place.



### Step 3:

Insert the prestripped wire into the crimp area of the contact.



### Step 4:

Close the tool until the ratchet releases. The ratchet is released when a loud click is heard and crimp is complete.