

# SWS600L

## RELIABILITY DATA

DWG No. CA757-57-01		
APPD	CHK	DWG
15-May-2007	11/May/07	2007-5-11 ZK/JR:2007

**I N D E X**

	<b>PAGE</b>
1. Calculated values of MTBF .....	R - 1
2. Component derating .....	R - 2
3. Main components temperature rise $\Delta T$ list .....	R - 7
4. Electrolytic capacitor life .....	R - 9
5. Abnormal test .....	R - 12
6. Vibration & shock test .....	R - 18
7. Noise simulate test .....	R - 24
8. Thermal shock test .....	R - 25
9. Fan life expectancy .....	R - 26

Terminology used

FG .....Frame Ground

※ The above data is typical value. As all units have nearly the same characteristics, the data to be considered as ability value.

## 1. Calculated values of MTBF

**MODEL : SWS600L-5**

### (1) Calculating method

Calculated based on part count reliability projection of JEITA (RCR-9102).

Individual failure rates  $\lambda_G$  is given to each part and MTBF is calculated by the count of each part.

<Formula> :

$$\text{MTBF} = \frac{1}{\lambda_{\text{equip}}} = \frac{1}{\sum_{i=1}^n N_i (\lambda_G \pi_Q)_i} \times 10^6 \text{ (Hours)}$$

$\lambda_{\text{equip}}$  : Total equipment failure rate (Failure/ $10^6$  Hours)

$\lambda_G$  : Generic failure rate for the ith generic part (Failure/ $10^6$  Hours)

$N_i$  : Quantity of ith generic part

n : Number of different generic part categories

$\pi_Q$  : Generic quality factor for the ith generic part ( $\pi_Q = 1$ )

### (2) MTBF values

G<sub>F</sub> : (Ground , Fixed)

**MTBF =136,721 (Hours)**

However MTBF calculation for fan isn't included.

## 2. Component derating

**MODEL : SWS600L-5**

### (1) Calculating method

#### (a) Measuring Conditions

Input	: 115 , 230VAC	Ambient temperature	: 50°C
Output	: 5V 120A(100%)	Mounting method	: Mounting A,B,C

#### (b) Semiconductors

Compared with maximum junction temperature and actual one which is calculated based on case temperature, power dissipation and thermal impedance.

#### (c) IC, Resistors, Capacitors, etc.

Ambient temperature, operating condition, power dissipation and so on are within derating criteria.

#### (d) Calculating Method of Thermal Impedance

$$\theta_{j-c} = \frac{T_{j(max)} - T_c}{P_{c(max)}} \quad \theta_{j-a} = \frac{T_{j(max)} - T_a}{P_{c(max)}} \quad \theta_{j-l} = \frac{T_{j(max)} - T_l}{P_{c(max)}}$$

$T_c$  : Case temperature at start point of derating ; 25°C in general

$T_a$  : Ambient temperature at start point of derating ; 25°C in general

$T_l$  : Lead temperature at start point of derating ; 25°C in general

$P_{c(max)}$  ( $P_{ch(max)}$ ) : Maximum collector(channel) dissipation

$T_{j(max)}$  ( $T_{ch(max)}$ ) : Maximum junction(channel) temperature

$\theta_{j-c}$  ( $\theta_{ch-c}$ ) : Thermal impedance between junction(channel) and case

$\theta_{j-a}$  : Thermal impedance between junction and air

$\theta_{j-l}$  : Thermal impedance between junction and lead

## (2) Component derating list

Location No.	Vin = 115VAC Tchmax = 150°C, Pch = 8.6W, Tch = Tc + ((θ ch-c) × Pch) = 105.9°C D.F. = 70.6%	Load = 100% θ ch-c = 1.66°C/W, Δ Tc = 41.6°C, Tch = Tc + ((θ ch-c) × Pch) = 105.9°C D.F. = 70.6%	Ta = 50°C Pch(max) = 75W, Tc = 91.6 °C
Q1,Q2 F20W60C3 SHINDENGEN	Tchmax = 150 °C, Pch = 18.6 W, Tch = Tc + ((θ ch-c) × Pch) = 111.3°C D.F. = 74.2%	θ ch-c = 0.833°C/W, Δ Tc = 45.8 °C, Tch = Tc + ((θ ch-c) × Pch) = 111.3°C D.F. = 74.2%	Pch(max) = 150W, Tc = 95.8 °C
Q304 2SA1213-Y-TE12L TOSHIBA	Tjmax = 150 °C, Pc = 82.7 mW, Tj = Ta + ((θ j-a) × Pc) = 95.7°C D.F. = 63.8%	θ j-a = 250°C/W, Δ Ta = 25 .0°C, Tj = Ta + ((θ j-a) × Pc) = 95.7°C D.F. = 63.8%	Pc(max) = 0.5W Ta = 75.0°C
Q331 2SC2712-Y-TE85L TOSHIBA	Tjmax = 125 °C, Pc = 16.0mW, Tj = Ta + ((θ j-a) × Pc) = 102.0°C D.F. = 81.6 %	θ j-a = 666.67°C/W, Δ Ta = 41.3°C, Tj = Ta + ((θ j-a) × Pc) = 102.0°C D.F. = 81.6 %	Pc(max) = 150mW Ta = 91.3°C
SR1 SF10JZ47(F) TOSHIBA	Tjmax = 125 °C, Pc = 3.2 W, Tj = Ta + ((θ j-c) × Pc) = 102.7°C D.F. = 82.2 %	θ j-c = 3.4°C/W, Δ Tc = 41.8 °C, Tj = Ta + ((θ j-c) × Pc) = 102.7°C D.F. = 82.2 %	Tc = 91.8°C
D1 D25XB60 SHINDENGEN	Tjmax = 150°C, Pd = 14.3W, Tj = Tc + ((θ j-c) × Pd) = 100.5°C D.F. = 67.0%	θ j-c = 1.0°C/W, Δ Tc = 36.2°C, Tj = Tc + ((θ j-c) × Pd) = 100.5°C D.F. = 67.0%	Tc = 86.2°C
D2 S20LC60US SHINDENGEN	Tjmax = 150 °C, Pd = 8.0 W, Tj = Tc + ((θ j-c) × Pd) = 95.3°C D.F. = 63.5%	θ j-c = 1.0°C/W, Δ Tc = 37.3°C, Tj = Tc + ((θ j-c) × Pd) = 95.3°C D.F. = 63.5%	Tc = 87.3°C
D51,D52 S60SC4M SINDENGEN	Tjmax = 150°C, Pd = 9.9W, Tj = Tc + ((θ j-c) × Pd) = 103.2 °C D.F. = 68.8%	θ j-c = 0.5°C/W, Δ Tc = 48.2 °C, Tj = Tc + ((θ j-c) × Pd) = 103.2 °C D.F. = 68.8%	Tc = 98.2°C
D53,D54,D55 S60SC4M SINDENGEN	Tjmax = 150 °C, Pd = 15.4 W, Tj = Tc + ((θ j-c) × Pd) = 113.0°C D.F. = 75.3 %	θ j-c = 0.5°C/W, Δ Tc = 55.3°C, Tj = Tc + ((θ j-c) × Pd) = 113.0°C D.F. = 75.3 %	Tc = 105.3 °C
D101 CRH01 TOSHIBA	Tjmax = 150°C, Pd = 9.3mW, Tj = Ta + ((θ j-a) × Pd) = 68.2°C D.F. = 45.5 %	θ j-a = 130°C/W, Δ Ta = 17.0°C, Tj = Ta + ((θ j-a) × Pd) = 68.2°C D.F. = 45.5 %	Ta = 67.0°C
D102 CRH01 TOSHIBA	Tjmax = 150°C, Pd = 9.6 mW, Tj = Ta + ((θ j-a) × Pd) = 66.6°C D.F. = 44.4%	θ j-a = 130°C/W, Δ Ta =15.4°C, Tj = Ta + ((θ j-a) × Pd) = 66.6°C D.F. = 44.4%	Ta = 65.4 °C
D151 U05NU44 TOSHIBA	Tjmax = 150 °C, Pd =270.0 mW, Tj = Ta + ((θ j-a) × Pd) = 112.3°C D.F. = 74.8%	θ j-a = 105 °C/W, Δ Ta =33.9°C, Tj = Ta + ((θ j-a) × Pd) = 112.3°C D.F. = 74.8%	Ta = 83.9°C
D301,D305 CRH01 TOSHIBA	Tjmax = 150°C, Pd =112.0mW, Tj = Ta + ((θ j-a) × Pd) =102.4°C D.F. = 68.2%	θ j-a = 130°C/W, Δ Ta =37.8°C, Tj = Ta + ((θ j-a) × Pd) =102.4°C D.F. = 68.2%	Ta = 87.8°C
D331 CRH01 TOSHIBA	Tjmax = 150 °C, Pd = 48.0mW, Tj = Ta + ((θ j-a) × Pd) = 88.3°C D.F. = 58.9 %	θ j-a = 130°C/W, Δ Ta = 32.1°C, Tj = Ta + ((θ j-a) × Pd) = 88.3°C D.F. = 58.9 %	Ta = 82.1 °C
D353 CRH01 TOSHIBA	Tjmax = 150°C, Pd = 147.0mW, Tj = Ta + ((θ j-a) × Pd) = 100.1°C D.F. = 66.7%	θ j-a = 130°C/W, Δ Ta =31.0°C, Tj = Ta + ((θ j-a) × Pd) = 100.1°C D.F. = 66.7%	Ta = 81.0°C

Location No.	Vin = 115VAC	Load = 100%	Ta = 50°C
D371 CRH01 TOSHIBA	Tjmax = 150°C, Pd = 6.7mW, Tj = Ta + ((θ j-a) × Pd) = 102.0 °C D.F. = 68.0%	θ j-a = 130°C/W, Δ Ta = 51.1°C,	Ta=101.1°C
A102 FA5502M FUJI-ELEC.	Tjmax = 150°C, Pd = 61.4mW, Tj = Ta + ((θ j-a) × Pd) = 92.0°C D.F. = 61.3 %	θ j-a = 192.3 °C/W, Δ Ta = 30.2°C,	Ta=80.2°C
A152 M51995AFP-600C MITSUBISHI	Tjmax = 150°C, Pd=50.0mW, Tj = Ta + ((θ j-a) × Pd) = 85.3°C D.F. = 56.8%	θ j-a = 83.3°C/W, Δ Ta = 31.1 °C,	Ta = 81.1°C
A301 BA178M12FP-E2 ROHM	Tjmax = 150°C, Pd = 260.0mW, Tj = Tc + ((θ j-c) × Pd) = 106.3°C D.F. = 70.9%	θ j-c = 125°C/W, Δ Tc = 23.8°C,	Tc = 73.8 °C
A303 BA178M05FP-E2 ROHM	Tjmax = 150 °C, Pd = 0.2W, Tj = Tc + ((θ j-c) × Pd) = 104.0°C D.F. = 69.3%	θ j-c = 125°C/W, Δ Tc = 29.0°C,	Tc = 79 .0°C
A331 UPC1093T-E1 NEC	Tjmax = 150 °C, Pd = 40.0mW, Tj = Ta + ((θ j-a) × Pd) = 97.4 °C D.F. = 64.9 %	θ j-a = 312.5°C/W, Δ Ta = 34.9 °C,	Ta = 84.9°C
A351 MIP2E2DMUL MATSHIBA	Tjmax = 150 °C, Pd = 1.5W, Tj = Tc + ((θ j-c) × Pd) = 95.0°C D.F. = 63.3 %	θ j-c = 10°C/W, Δ Tc = 30.0°C,	Tc = 80.0 °C
PC31 PS2581L2 (LED) NEC	Tjmax = 125 °C, Pc = 4.7mW, Tj = Ta + ((θ j-a) × Pc) = 75.0 °C D.F. = 60.0%	θ j-a = 666.7°C/W, Δ Ta = 21.9°C,	Pc(max) = 150mW, Ta = 71.9 °C
PC31 PS2581L2 (TRANSISTOR) NEC	Tjmax = 125°C, Pc = 3.0mW, Tj = Ta + ((θ j-a) × Pc) = 73.9°C D.F. = 59.1%	θ j-a = 666.7°C/W, Δ Ta = 21.9°C,	Pc(max) = 150mW, Ta = 71.9°C
PC52 PS2581L2 (LED) NEC	Tjmax = 125°C, Pc = 9.0mW, Tj = Ta + ((θ j-a) × Pc) = 77.0 °C D.F. = 61.6%	θ j-a = 666.7°C/W, Δ Ta = 21.0 °C,	Pc(max) = 150mW, Ta = 71.0°C
PC52 PS2581L2 (TRANSISTOR) NEC	Tjmax = 125°C, Pc = 2.0mW, Tj = Ta + ((θ j-a) × Pc) = 72.3°C D.F. = 57.9 %	θ j-a = 666.7°C/W, Δ Ta = 21.0 °C,	Pc(max) = 150mW, Ta = 71.0 °C
PC302 TLP172A (LED) TOSHIBA	If(max) = 50mA, If = 7.7mA, If(max) at Ta = 25.6mA D.F. = 30.1%	Δ If /°C = -0.5mA/°C, Δ Ta = 23.9 °C ,	Ta = 73.9°C
PC302 TLP172A (MOSFET) TOSHIBA	I <sub>ON</sub> (max) = 400mA, I <sub>ON</sub> = 10.0 mA, I <sub>ON</sub> (max) at Ta = 204.4mA D.F. = 4.9%	Δ I <sub>ON</sub> /°C = -4.0mA/°C, Δ Ta = 23.9 °C ,	Ta = 73.9 °C
PC303 PS2801-1 (LED) NEC	Tjmax = 125°C, Pc = 2.5 mW, Tj = Ta + ((θ j-a) × Pc) = 94.4°C D.F. = 75.5 %	θ j-a = 1666.7°C/W, Δ Ta = 40.2°C,	Pc(max) = 60mW, Ta = 90.2°C
PC303 PS2801-1 (TRANSISTOR) NEC	Tjmax = 125 °C, Pc = 1.0mW, Tj = Ta + ((θ j-a) × Pc) = 91.0°C D.F. = 72.8%	θ j-a = 833.3°C/W, Δ Ta = 40.2°C,	Pc(max) = 120mW, Ta = 90.2°C

## (2) Component derating list










Location No.	Vin = 230VAC Tchmax = 150°C, Pch = 2.7 W, Tch = Tc + ((θ ch-c) × Pch) = 80.5°C D.F. = 53.7%	Load = 100% θ ch-c = 1.66°C/W, Δ Tc = 26.0 °C, Tch = Tc + ((θ ch-c) × Pch) = 80.5°C D.F. = 53.7%	Ta = 50°C Pch(max) = 75W, Tc = 76 .0°C
Q1,Q2 F20W60C3 SHINDENGEN	Tchmax = 150 °C, Pch = 18.6 W, Tch = Tc + ((θ ch-c) × Pch) =107.8 °C D.F. = 71.9%	θ ch-c = 0.833°C/W, Δ Tc =42.3 °C, Tch = Tc + ((θ ch-c) × Pch) =107.8 °C D.F. = 71.9%	Pch(max) = 150W, Tc = 92.3°C
Q304 2SA1213-Y-TE12L TOSHIBA	Tjmax = 150 °C, Pc = 82.7mW, Tj = Ta + ((θ j-a) × Pc) = 95.7°C D.F. = 63.8%	θ j-a = 250°C/W, Δ Ta = 25.0°C, Tj = Ta + ((θ j-a) × Pc) = 95.7°C D.F. = 63.8%	Pc(max) = 0.5W Ta = 75.0°C
Q331 2SC2712-Y-TE85L TOSHIBA	Tjmax = 125 °C, Pc = 16.0mW, Tj = Ta + ((θ j-a) × Pc) =100.3 °C D.F. = 80.2%	θ j-a = 666.67°C/W, Δ Ta = 39.6°C, Tj = Ta + ((θ j-a) × Pc) =100.3 °C D.F. = 80.2%	Pc(max) = 150mW Ta =89.6 °C
SR1 SF10JZ47(F) TOSHIBA	Tjmax = 125 °C, Pc = 3.1 W, Tj = Tc + ((θ j-c) × Pc) = 91.5°C D.F. = 73.2%	θ j-c = 3.4°C/W, Δ Tc = 31.0°C, Tj = Tc + ((θ j-c) × Pc) = 91.5°C D.F. = 73.2%	Tc = 81.0°C
D1 D25XB60 SHINDENGEN	Tjmax = 150°C, Pd = 7.1W, Tj = Tc + ((θ j-c) × Pd) = 78.9°C D.F. = 52.6%	θ j-c = 1.0°C/W, Δ Tc = 21.8°C, Tj = Tc + ((θ j-c) × Pd) = 78.9°C D.F. = 52.6%	Tc = 71.8°C
D2 S20LC60US SHINDENGEN	Tjmax = 150 °C, Pd = 7.5W, Tj = Tc + ((θ j-c) × Pd) =83.5°C D.F. =55.7 %	θ j-c = 1.0°C/W, Δ Tc = 26.0°C, Tj = Tc + ((θ j-c) × Pd) =83.5°C D.F. =55.7 %	Tc = 76.0°C
D51,D52 S60SC4M SINDENGEN	Tjmax = 150°C, Pd = 9.9W, Tj = Tc + ((θ j-c) × Pd) = 98.2°C D.F. = 65.4%	θ j-c = 0.5°C/W, Δ Tc =43.2 °C, Tj = Tc + ((θ j-c) × Pd) = 98.2°C D.F. = 65.4%	Tc = 93.2°C
D53,D54,D55 S60SC4M SINDENGEN	Tjmax = 150 °C, Pd = 15.4W, Tj = Tc + ((θ j-c) × Pd) = 113.2°C D.F. = 75.5%	θ j-c = 0.5°C/W, Δ Tc =55.5 °C, Tj = Tc + ((θ j-c) × Pd) = 113.2°C D.F. = 75.5%	Tc = 105.5°C
D101 CRH01 TOSHIBA	Tjmax = 150°C, Pd = 12.7 mW, Tj = Ta + ((θ j-a) × Pd) = 67.2°C D.F. = 44.8%	θ j-a = 130°C/W, Δ Ta = 15.5°C, Tj = Ta + ((θ j-a) × Pd) = 67.2°C D.F. = 44.8%	Ta =65.5 °C
D102 CRH01 TOSHIBA	Tjmax = 150°C, Pd = 8.4 mW, Tj = Ta + ((θ j-a) × Pd) =65.3 °C D.F. = 43.5%	θ j-a = 130°C/W, Δ Ta =14.2°C, Tj = Ta + ((θ j-a) × Pd) =65.3 °C D.F. = 43.5%	Ta = 64.2°C
D151 U05NU44 TOSHIBA	Tjmax = 150 °C, Pd = 270.0mW, Tj = Ta + ((θ j-a) × Pd) = 112.8°C D.F. = 75.2%	θ j-a = 105 °C/W, Δ Ta =34.4°C, Tj = Ta + ((θ j-a) × Pd) = 112.8°C D.F. = 75.2%	Ta = 84.4°C
D301 CRH01 TOSHIBA	Tjmax = 150°C, Pd =112.0mW, Tj = Ta + ((θ j-a) × Pd) = 100.2°C D.F. = 66.8%	θ j-a = 130°C/W, Δ Ta =35.6°C, Tj = Ta + ((θ j-a) × Pd) = 100.2°C D.F. = 66.8%	Ta =85.6 °C
D331 CRH01 TOSHIBA	Tjmax = 150 °C, Pd = 48.0mW, Tj = Ta + ((θ j-a) × Pd) =86.2 °C D.F. = 57.5%	θ j-a = 130°C/W, Δ Ta =30.0°C, Tj = Ta + ((θ j-a) × Pd) =86.2 °C D.F. = 57.5%	Ta = 80.0°C
D353 CRH01 TOSHIBA	Tjmax = 150°C, Pd = 147.0mW, Tj = Ta + ((θ j-a) × Pd) = 95.8°C D.F. = 63.9%	θ j-a = 130°C/W, Δ Ta = 26.7°C, Tj = Ta + ((θ j-a) × Pd) = 95.8°C D.F. = 63.9%	Ta = 76.7°C

Location No.	Vin = 230VAC	Load = 100%	Ta = 50°C
D371 CRH01 TOSHIBA	Tjmax = 150°C, Pd = 6.7mW, Tj = Ta + ((θ j-a) × Pd) 100.3°C D.F. = 66.8%	θ j-a = 130°C/W, Δ Ta = 49.4°C,	Ta=99.4°C
A102 FA5502M FUJI-ELEC.	Tjmax = 150°C, Pd = 38.1mW, Tj = Ta + ((θ j-a) × Pd) = 83.1°C D.F. = 55.4%	θ j-a = 192.3 °C/W, Δ Ta = 25.8°C,	Ta=75.8°C
A152 M51995AFP-600C MITSUBISHI	Tjmax = 150°C, Pd= 50.0mW, Tj = Ta + ((θ j-a) × Pd)=81.2 °C D.F. = 54.1%	θ j-a = 83.3°C/W, Δ Ta = 27.0°C,	Ta = 77.0°C
A301 BA178M12FP-E2 ROHM	Tjmax = 150°C, Pd =260 mW, Tj = Tc + ((θ j-c) × Pd) = 101.4°C D.F. = 67.6%	θ j-c = 125°C/W, Δ Tc = 18.9°C,	Tc = 68.9°C
A303 BA178M05FP-E2 ROHM	Tjmax = 150 °C, Pd = 0.2W, Tj = Tc + ((θ j-c) × Pd) = 104.0°C D.F. = 69.3%	θ j-c = 125°C/W, Δ Tc =29.0°C,	Tc = 79 °C
A331 UPC1093T-E1 NEC	Tjmax = 150 °C, Pd =40.0mW, Tj = Ta + ((θ j-a) × Pd) = 94.3°C D.F. = 62.9%	θ j-a = 312.5°C/W, Δ Ta = 31.8°C,	Ta = 81.8°C
A351 MIP2E2DMUL MATSUSHIBA	Tjmax = 150 °C, Pd = 1.5W, Tj = Tc + ((θ j-c) × Pd) = 91.7°C D.F.=61.1 %	θ j-c = 10°C/W, Δ Tc =26.7 °C,	Tc = 76.7°C
PC31 PS2581L2 (LED) NEC	Tjmax = 125 °C, Pc = 4.7mW, Tj = Ta + ((θ j-a) × Pc) =70.8 °C D.F. = 56.7%	θ j-a = 666.7°C/W, Δ Ta =17.7 °C,	Pc(max) = 150mW, Ta = 67.7°C
PC31 PS2581L2 (TRANSISTOR) NEC	Tjmax = 125°C, Pc = 3.0mW, Tj = Ta + ((θ j-a) × Pc) = 69.7°C D.F. = 55.8%	θ j-a = 666.7°C/W, Δ Ta = 17.7°C,	Pc(max) = 150mW, Ta = 67.7°C
PC52 PS2581L2 (LED) NEC	Tjmax = 125°C, Pc = 9.0mW, Tj = Ta + ((θ j-a) × Pc) = 72.9°C D.F. = 58.3%	θ j-a = 666.7°C/W, Δ Ta = 16.9°C,	Pc(max) = 150mW, Ta=66.9 °C
PC52 PS2581L2 (TRANSISTOR) NEC	Tjmax = 125°C, Pc = 2.0mW, Tj = Ta + ((θ j-a) × Pc) = 68.2°C D.F. = 54.6%	θ j-a = 666.7°C/W, Δ Ta = 16.9 °C,	Pc(max) = 150mW, Ta=66.9 °C
PC302 TLP172A (LED) TOSHIBA	If(max) = 50mA, If = 7.7mA, If(max) at Ta = 27.8mA D.F.=27.7%	Δ If /°C = -0.5mA/°C, Δ Ta=19.4 °C,	Ta =69.4 °C
PC302 TLP172A (MOSFET) TOSHIBA	Ion(max) = 400mA, Ion = 10.0 mA, Ion(max) at Ta = 222.4mA D.F.=4.5 %	Δ Ion /°C = -4.0mA/°C, Δ Ta = 19.4°C,	Ta = 69.4°C
PC303 PS2801-1 (LED) NEC	Tjmax = 125°C, Pc =2.5 mW, Tj = Ta + ((θ j-a) × Pd) = 92.8°C D.F. = 74.2%	θ j-a = 1666.7°C/W, Δ Ta =38.6 °C,	Pc(max) = 60mW, Ta = 88.6°C
PC303 PS2801-1 (TRANSISTOR) NEC	Tjmax = 125 °C, Pc =1.0 mW, Tj = Ta + ((θ j-a) × Pd) = 89.4°C D.F.=71.5 %	θ j-a = 833.3°C/W, Δ Ta = 38.6°C,	Pc(max) = 120mW, Ta =88.6 °C

### 3. Main components temperature rise $\Delta T$ list

**MODEL : SWS600L-5**






Conditions

	(A)	(B)	(C)	Don't Use	Don't Use	Don't Use
						
Mounting Method (Standard Mounting Method:(A))						
Input Voltage (VAC)	115					
Output Voltage (VDC)	5					
Output Current (A)	120					

Output derating		$\Delta T$ Temperature rise ( $^{\circ}\text{C}$ )					
		Io=100% (Ta =50°C)			Io=50% (Ta =74°C)		
Location No.	Parts Name	Mounting A	Mounting B	Mounting C	Mounting A	Mounting B	Mounting C
L1	BALUN COIL	33.7	34.1	33.8	12.5	12.8	13.5
L2	BALUN COIL	33.5	31.6	31.8	12.7	12.3	13.1
L31	CHOKE COIL	43.8	46.1	45.0	29.4	30.3	30.4
L51	CHOKE COIL	69.9	70.6	68.2	23.7	23.8	23.9
T21	TRANSE PULSE	37.2	38.2	36.7	23.1	24.4	24.6
T32	TRANSE PULSE	46.2	45.9	44.2	20.2	20.6	20.8
D1	BRIDGE DIODE	33.6	36.0	36.2	16.6	17.4	18.2
D2	LLD	34.2	37.3	36.2	15.3	17.5	17.8
D51~D52	SBD	48.2	43.1	40.8	20.7	18.9	18.8
D53~D54	SBD	55.3	51.8	50.0	24.2	23.0	23.2
Q1~Q2	MOS FET	40.4	41.6	41.2	19.0	20.4	21.0
Q31~Q32	MOS FET	45.8	45.8	45.0	25.0	25.2	25.3
SR1	THYRISTOR	39.1	41.8	41.8	17.4	19.7	20.2
A102	CHIP IC	28.7	30.2	30.1	18.7	20.9	21.3
A152	CHIP IC	29.9	31.1	30.2	21.1	22.3	22.5
A351	CHIP IC	30.0	29.7	29.0	20.1	21.0	21.7
C12	E. CAP.	19.4	20.3	19.7	11.2	12.5	12.8
C13	E. CAP.	11.3	11.5	11.3	3.7	4.4	4.9
C51	E. CAP.	33.5	34.2	32.5	13.8	14.4	14.8
C52	E. CAP.	23.1	23.7	23.0	11.0	12.0	12.1
C53	E. CAP.	24.3	24.2	23.8	11.2	11.8	11.8
C54	E. CAP.	29.8	31.1	29.0	12.8	13.3	13.3

## MODEL : SWS600L-5


## Conditions

	(A)	(B)	(C)	Don't Use	Don't Use	Don't Use
Mounting Method (Standard Mounting Method:(A))						
Input Voltage (VAC)	230					
Output Voltage (VDC)	5					
Output Current (A)	120					

Output derating		$\Delta T$ Temperature rise ( $^{\circ}\text{C}$ )					
		Io=100% (Ta =50°C)			Io=50% (Ta =74°C)		
Location No.	Parts Name	Mounting A	Mounting B	Mounting C	Mounting A	Mounting B	Mounting C
L1	BALUN COIL	16.0	16.3	17.2	7.2	7.9	8.4
L2	BALUN COIL	16.3	15.8	16.8	7.3	7.6	8.2
L31	CHOKE COIL	33.0	33.6	33.3	23.0	23.4	23.5
L51	CHOKE COIL	69.1	68.6	68.9	23.4	23.2	23.3
T21	TRANSE PULSE	33.5	35.0	34.9	22.3	23.2	23.4
T32	TRANSE PULSE	45.0	44.6	44.0	19.9	19.8	20.1
D1	BRIDGE DIODE	20.3	21.1	21.8	10.4	10.8	11.2
D2	LLD	24.6	26.0	25.9	11.9	13.0	13.1
D51~D52	SBD	43.2	42.0	41.0	20.7	18.4	18.4
D53~D54	SBD	55.5	50.7	50.5	24.1	22.7	23.0
Q1~Q2	MOS FET	25.0	25.4	26.0	13.5	14.2	14.3
Q31~Q32	MOS FET	42.3	40.6	41.0	23.8	23.2	23.7
SR1	THYRISTOR	29.1	30.6	31.0	14.1	15.3	15.5
A102	CHIP IC	23.4	25.2	25.8	17.3	19.1	19.4
A152	CHIP IC	26.5	27.0	26.8	19.8	20.5	20.7
A351	CHIP IC	26.1	26.3	26.7	19.0	19.8	20.2
C12	E. CAP.	16.3	16.6	16.8	10.2	10.9	11.3
C13	E. CAP.	8.5	8.0	8.1	2.6	3.1	3.6
C51	E. CAP.	32.6	32.8	32.6	13.7	13.8	14.0
C52	E. CAP.	21.0	20.2	20.7	10.3	10.8	10.9
C53	E. CAP.	22.8	21.0	21.9	10.5	10.5	10.8
C54	E. CAP.	30.0	29.4	28.8	12.8	12.8	12.9


#### 4. Electrolytic capacitor lifetime

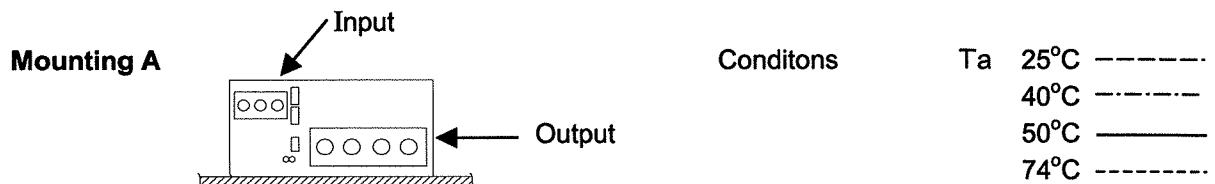MODEL : SWS600L-5




Vin = 115VAC

Load (%)	Lifetime (years)			
	Ta = 25°C	Ta = 40°C	Ta = 50°C	Ta = 74°C
20	10.0	10.0	7.2	1.4
40	10.0	10.0	7.0	1.3
50	10.0	10.0	6.7	1.3
60	10.0	10.0	5.8	—
80	10.0	9.9	5.0	—
100	10.0	7.1	3.5	—

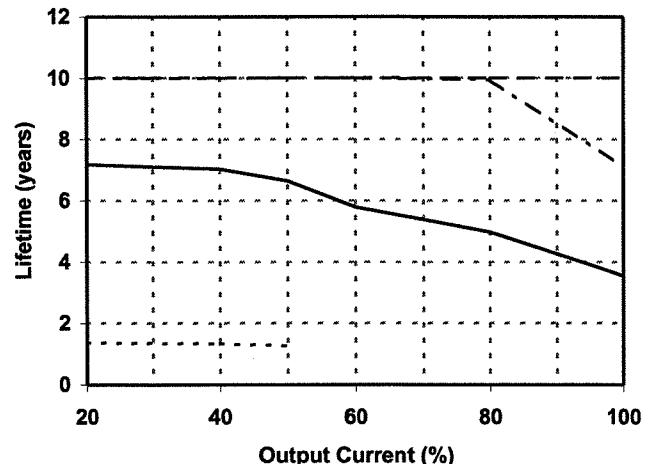


Vin = 230VAC

Load (%)	Lifetime (years)			
	Ta = 25°C	Ta = 40°C	Ta = 50°C	Ta = 74°C
20	10.0	10.0	7.9	1.5
40	10.0	10.0	7.9	1.5
50	10.0	10.0	7.4	1.4
60	10.0	10.0	6.7	—
80	10.0	10.0	5.7	—
100	10.0	7.5	3.8	—

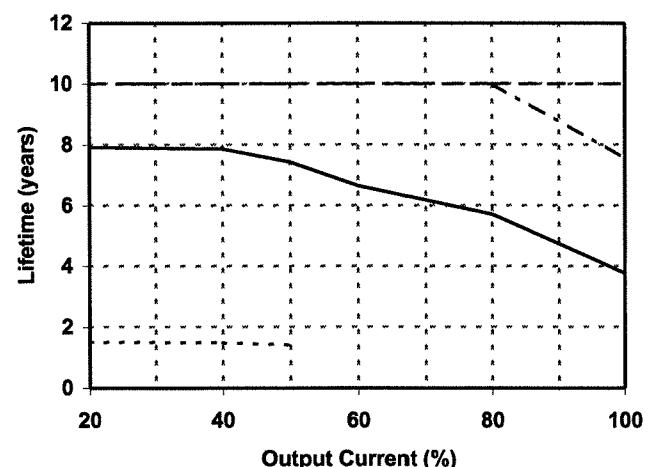

## MODEL : SWS600L-5

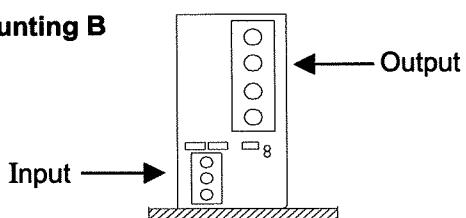Mounting B




Conditions

Ta	25°C	-----
	40°C	-----
	50°C	_____
	74°C	-----


Vin = 115VAC

Load (%)	Lifetime (years)			
	Ta = 25°C	Ta = 40°C	Ta = 50°C	Ta = 74°C
20	10.0	10.0	7.5	1.4
40	10.0	10.0	6.8	1.3
50	10.0	10.0	6.5	1.2
60	10.0	10.0	6.1	—
80	10.0	8.7	4.3	—
100	10.0	6.8	3.4	—

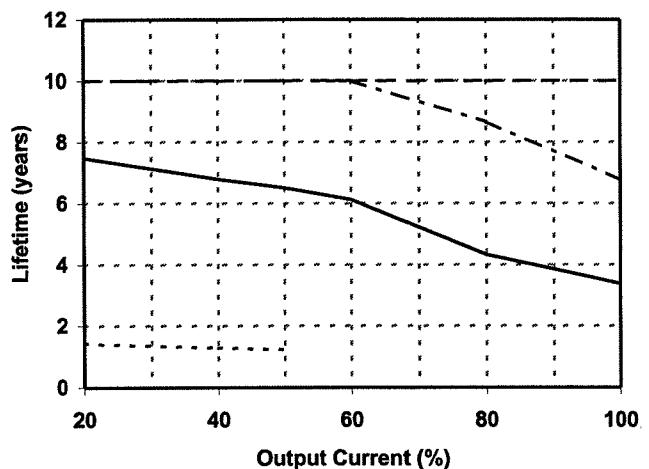


Vin = 230VAC

Load (%)	Lifetime (years)			
	Ta = 25°C	Ta = 40°C	Ta = 50°C	Ta = 74°C
20	10.0	10.0	7.9	1.5
40	10.0	10.0	7.8	1.5
50	10.0	10.0	7.3	1.4
60	10.0	10.0	6.9	—
80	10.0	10.0	5.2	—
100	10.0	7.4	3.7	—

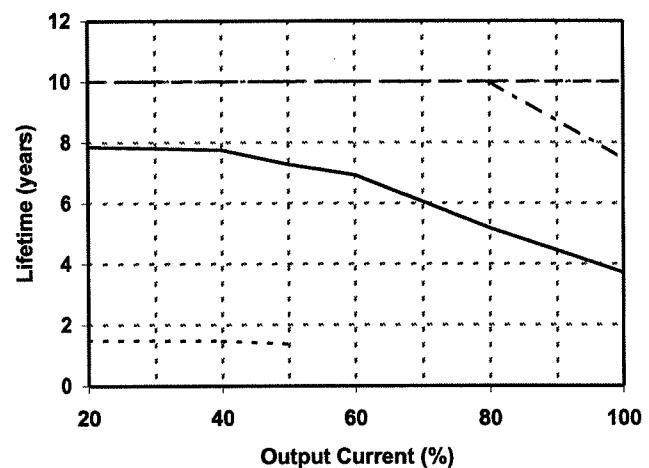

## MODEL : SWS600L-5

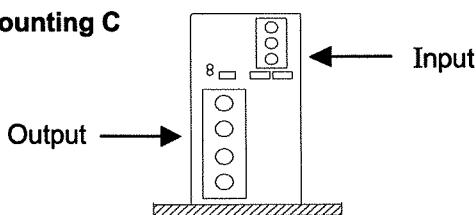Mounting C




Conditions

Ta	25°C	-----
	40°C	-----
	50°C	_____
	74°C	-----


Vin = 115VAC

Load (%)	Lifetime (years)			
	Ta = 25°C	Ta = 40°C	Ta = 50°C	Ta = 74°C
20	10.0	10.0	7.4	1.4
40	10.0	10.0	6.7	1.3
50	10.0	10.0	6.4	1.2
60	10.0	10.0	5.8	—
80	10.0	9.5	4.8	—
100	10.0	7.6	3.8	—

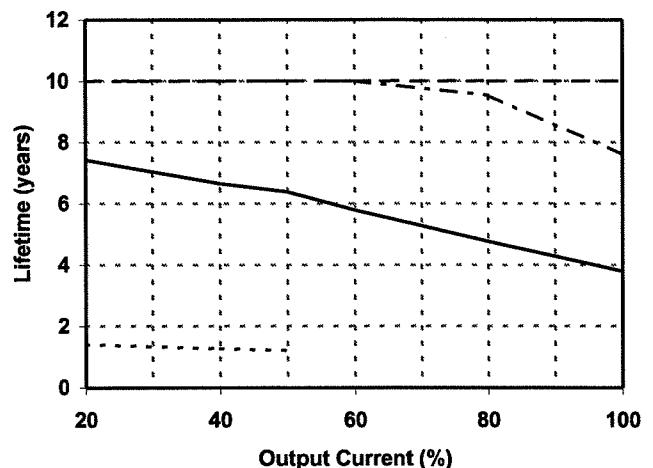

Vin = 230VAC

Load (%)	Lifetime (years)			
	Ta = 25°C	Ta = 40°C	Ta = 50°C	Ta = 74°C
20	10.0	10.0	8.1	1.5
40	10.0	10.0	7.4	1.4
50	10.0	10.0	7.1	1.3
60	10.0	10.0	6.7	—
80	10.0	10.0	5.6	—
100	10.0	7.5	3.8	—

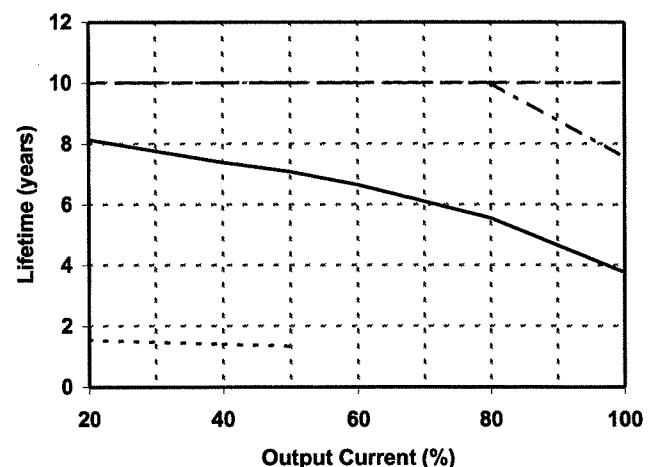

**5. Abnormal test**

MODEL : SWS600L-5

**(1) Conditions :**

Input : 230VAC

Output: 5V 120A

Ta : 25°C , 70%RH

**(2) Test result**

(Da: Damaged)

No.	Test point		Test mode		Test result													Note
	Location No.	Test Point	Short	Open	1	2	3	4	5	6	7	8	9	10	11	12	13	
1	D1	AC-AC	O							O	O				O			Da:F1
2		AC-DC	O							O	O				O			Da:F1
3		AC	O												O			
4		DC	O												O			
5	Q1	D-S	O								O	O			O			Da:F1
6		D-G	O								O	O			O			Da:F1,Q1
7		G-S	O								O				O			Da:TFR1
8		D	O								O				O			Da:Q1
9		S	O								O				O			Da:Q1
10		G	O								O	O			O			Da:F1,Q1
11	Q2	D-S	O								O	O			O			Da:F1
12		D-G	O								O	O			O			Da:F1,Q2
13		G-S	O								O				O			Da:TFR1
14		D	O								O				O			Da:Q2
15		S	O								O				O			Da:Q2
16		G	O								O	O			O			Da:F1,Q2
17	SR1	1-2	O												O			
18		2-3	O												O			
19		3-1	O								O				O			Da:TFR1
20		1	O								O				O			Da:TFR1
21		2	O								O				O			Da:TFR1
22		3	O								O				O			Da:TFR1
23	D2	A-K	O								O	O			O			Da:F1,Q1,Q2
24		A1	O												O			
25		A2	O												O			
26		K	O								O	O			O			Da:F1,Q1,Q2
27	D101	A-K	O								O				O			Da:TFR1
28		A	O								O				O			Da:TFR1
29	D102	A-K	O								O				O			Da:TFR1
30		A	O								O				O			Da:Q1,Q2
31	Q31	D-S	O								O	O			O			Da:F1
32		D-G	O								O	O			O			Da:F1, Q31,D155
33		G-S	O								O				O			Da:R163
34		D	O								O	O			O			Da:F1,Q31
35		S	O												O			
36		G	O								O	O			O			Da:F1,Q31
37	Q32	D-S	O								O	O			O			Da:F1
38		D-G	O								O	O			O			Da:F1, Q32,D155

No.	Test point		Test mode		Test result												
	Location No.	Test Point	Short	Open	1	2	3	4	5	6	7	8	9	10	11	12	13
					Fire	Smoke	Burst	Smell	Red Hot	Damaged	Fuse Blow	OVP	OCP	No Output	No Change	Others	Note
39	Q32	G-S	O							O				O			Da:R163
40		D	O							O	O			O			Da:F1,Q32
41		S	O											O			
42		G	O							O	O			O			Da:F1,Q32
43	Q152	B-C	O							O	O			O			Da:F1, Q31,Q32
44		C-E	O											O			
45		E-B	O							O	O			O			Da:F1,D155, Q31,Q32
46		B	O							O	O			O			Da:F1,D155, Q31,Q32
47		C	O							O	O			O			Da:F1,D155, Q31,Q32
48		E	O							O	O			O			Da:F1, Q31,D155
49		B-C	O											O			
50		C-E	O							O				O			Da:R163
51	Q153	E-B	O							O	O			O			Da:F1, Q31,D155
52		B	O							O	O			O			Da:F1, Q31,D155
53		C	O							O	O			O			Da:F1, Q31,D155
54		E	O							O	O			O			Da:F1, Q31,D155
55	Z151	A-K	O							O				O			Da:R163
56		A	O											O			
57		K	O											O			
58	D151	A-K	O											O			
59		A	O											O			
60		K	O											O			
61	D155	A-K	O											O			
62		A	O											O			
63		K	O											O			
64	D51	A-K	O							O	O			O			Da:F1, Q31,Q32,D155
65		A	O											O			
66		K	O							O				O			Da:D52
67	D53	A-K	O											O			
68		A	O											O			
69		K	O							O				O			Da:D54,D55
70	A351	1-2	O											O			
71		2-3	O							O	O			O			Da:F201
72		3-1	O							O	O			O			Da:F201,A351,R351,R352,Z351, D352,Q351
73		1	O											O			
74		2	O											O			
75		3	O											O			
76	T32	3-5	O											O	O	Pin about 180W	
77		13-14	O							O	O			O	O		Da: F1,Q31,Q32,D155
78		3	O											O	O		
79		5	O											O	O		
80		13	O											O	O		
81		14	O											O	O		
82		13'	O											O	O		
83		14'	O											O	O		

No.	Test point		Test mode		Test result												
	Location No.	Test Point	Short	Open	1	2	3	4	5	6	7	8	9	10	11	12	13
					Fire	Smoke	Burst	Smell	Red Hot	Damaged	Fuse Blown	OVP	OCP	No Output	No Change	Others	Note
84	T21	1-2	O												O		
85		3-4	O												O		
86		6-7	O												O		
87		8-9	O												O		
88		1	O												O		
89		2	O												O		
90		3	O												O		
91		4	O												O		
92		6	O												O		
93		7	O												O		
94	T33	8	O									O			O		
95		9	O									O			O		
96		1-2	O													O	
97		3-4	O												O		
98		1	O												O		
99	L31	2	O												O		
100		3	O												O		
101		4	O												O		
102		2-11	O									O			O		Da:TFR1
103	L51	6-7	O									O	O		O		Da: F1,Q1,Q2
104		2	O									O			O		Da:TFR1
105		6	O												O		
106		7	O												O		
107		11	O									O			O		Da:TFR1
108		3-9	O												O		Pin increase, Vout drop to 4.8V
109	Q301	13-16	O												O		ALM Malfunction
110		3	O												O		
111		9	O												O		
112		13	O												O		
113		16	O												O		
114		C-E	O												O		
115	Q304	C-B	O												O		
116		B-E	O												O		LED OFF
117		C	O												O		LED OFF
118		E	O												O		LED OFF
119		B	O												O		LED OFF
120		C-E	O												O		
121	Q304	C-B	O												O		FAN SPEED LOW
122		B-E	O												O		FAN STOP, LED OFF
123		C	O												O		FAN STOP, LED OFF
124		E	O												O		FAN STOP, LED OFF
125		B	O												O		FAN STOP, LED OFF
126	Q306	C-E	O												O		
127		C-B	O												O		
128		B-E	O												O		
129		C	O												O		

No.	Test point		Test mode		Test result												
	Location No.	Test Point	Short	Open	1	2	3	4	5	6	7	8	9	10	11	12	13
					Fire	Smoke	Burst	Smell	Red Hot	Damaged	Fuse Blown	OVP	OCP	No Output	No Change	Others	Note
130	Q306	E	O											O			
131		B	O											O			
132	Q307	C-E	O												O	LED OFF	
133		C-B	O												O	LED OFF	
134		B-E	O												O		
135		C	O												O		
136		E	O												O		
137		B	O												O		
138	Q373	C-E	O												O		
139		C-B	O												O		
140		B-E	O												O		
141		C	O												O		
142		E	O												O		
143		B	O												O		
144	Q331	C-E	O												O		
145		C-B	O												O		
146		B-E	O												O		
147		C	O												O		
148		E	O									O			O		
149		B	O									O			O		
150	Q151	C-E	O												O		
151		C-B	O												O		
152		B-E	O												O		
153		C	O												O		
154		E	O												O		
155		B	O												O		
156	Q154	C-E	O												O		
157		C-B	O												O		
158		B-E	O												O		
159		C	O												O		
160		E	O												O		
161		B	O												O		
162	Q155	C-E	O												O		
163		C-B	O												O		
164		B-E	O												O		
165		C	O												O		
166		E	O												O		
167		B	O												O		
168	Q158	C-E	O												O		
169		C-B	O												O		
170		B-E	O												O		
171		C	O												O		
172		E	O												O		
173		B	O												O		
174	D301		O											O			
175			O												O		

No.	Test point		Test mode		Test result												
	Location No.	Test Point	Short	Open	1	2	3	4	5	6	7	8	9	10	11	12	13
					Fire	Smoke	Burst	Smell	Red Hot	Damaged	Fuse Blown	OVP	OCP	No Output	No Change	Others	Note
176	D303		O													O	FAN SPEED HIGH
177				O												O	
178	D305		O													O	
179				O												O	
180	D384		O													O	FAN STOP, LED OFF
181				O												O	
182	D371		O													O	LED OFF, ALM Malfunction
183				O												O	LED OFF, ALM Malfunction
184	D331		O													O	
185				O								O	O				
186	D204		O													O	
187				O												O	Output unstable
188	D153		O													O	
189				O								O	O				
190	D156		O													O	
191				O												O	
192	Z331		O									O	O				
193				O												O	
194	Z153		O													O	
195				O												O	
196	Z203		O									O	O				
197				O												O	OVP malfunction
198	PC 303	1-2	O													O	LED OFF
199		3-4	O													O	
200		1,2	O													O	LED OFF
201		3,4	O													O	LED OFF
202	PC 302	1-2	O													O	ALM malfunction
203		3-4	O													O	ALM malfunction
204		1,2	O													O	ALM malfunction
205		3,4	O													O	ALM malfunction
206	PC 305	1-2	O													O	ON/OFF control malfunction
207		3-4	O													O	
208		1,2	O													O	ON/OFF control malfunction
209		3,4	O													O	ON/OFF control malfunction
210	PC31	1-2	O													O	
211		3-4	O													O	ON/OFF control malfunction
212		1,2	O													O	
213		3,4	O													O	
214	PC51	1-2	O													O	OVP malfunction
215		3-4	O													O	
216		1,2	O													O	OVP malfunction
217		3,4	O													O	OVP malfunction
218	PC52	1-2	O									O	O				
219		3-4	O													O	
220		1,2	O									O	O				
221		3,4	O									O	O				

No.	Test point		Test mode		Test result												
	Location No.	Test Point	Short	Open	1	2	3	4	5	6	7	8	9	10	11	12	13
					Fire	Smoke	Burst	Smell	Red Hot	Damaged	Fuse Blown	OVP	OCP	No Output	No Change	Others	Note
222	PD91		O														O LED OFF
223				O													O LED OFF
224	A331	1-2	O												O		
225		1-3	O													O	5V drop to 1.53V
226		2-3	O												O		
227		1		O								O		O			
228		2		O							O			O			
229		3		O							O		O				
230	A151	1-2	O													O	
231		1-3	O												O		
232		2-3	O											O			
233		1		O								O		O			
234		2		O								O		O			
235		3		O										O			
236	A301	1-2	O												O	FAN SPEED HIGH	
237		1-3	O												O		
238		2-3	O												O		
239		1		O										O			
240		2		O										O			
241		3		O											O	FAN SPEED HIGH	
242	A201	4-5	O													O	OUTPUT LOW
243		5-6	O												O		
244		6-7	O												O	OUTPUT LOW	
245		7-8	O												O		
246		4		O											O		
247		5		O											O		
248		6		O											O	OUTPUT LOW	
249		7		O											O		
250		8		O											O		

**(1).Truck transportation over U.S. highways vibration test**  
 (MIL-STD-810F 514.5 Category 4- Truck/trailer/tracked-restrained cargo)

**1. Purpose**

Test based on [MIL-STD-810F 514.5 Category 4-Truck/trailer/tracked-restrained cargo-Truck transportation over U.S. highways]

**2. Test method**

Unit was taken directly from production line. Unit was compliant with production standards.  
 The performance of vibration test machine is confirmed before vibration test.  
 Unit is tested in random vibration conditions based on [MIL-STD-810F\_figure 514.5C-1]

<MIL-STD-810F table 514.5C-VII>

Break points for curves of figure 514.5C-1 U.S.highway truck vibration exposures					
Vertical		Transverse		Longitudinal	
Hz	$g^2/Hz$	Hz	$g^2/Hz$	Hz	$g^2/Hz$
10	0.01500	10	0.00013	10	0.00650
40	0.01500	20	0.00065	20	0.00650
500	0.00015	30	0.00065	120	0.00020
1.04	g rms	78	0.00002	121	0.00300
		79	0.00019	200	0.00300
		120	0.00019	240	0.00150
		500	0.00001	340	0.00003
		0.204	g rms	500	0.0002
				0.740	g rms

\* See the APPENDIX B [Direction of vibration]

\* Test time is 1 hour in each directions. (It shows road transportation of 1000 miles in U.S. by truck.)

**3. Acceptable conditions**

During vibration test,no destruction in the test unit.

After vibration test,no abnormality in the electric characteristics and the mechanism.

**4. Test result**

Model: SWS600L-5,SWS600L-12,SWS600L-24

Io=100%	Check item	From		To		
Input voltage: AC115V	Output voltage (V)	5.01	12.07	24.05	5.01	12.06
	Efficiency (%)	75.9	80.8	82.8	75.9	80.8
	Ripple (mV)	51	40	34	52	40
Input voltage: AC230V	Output voltage (V)	5.00	12.07	24.05	5.00	12.06
	Efficiency (%)	78.5	83.4	85.6	78.5	83.4
	Ripple (mV)	51	40	34	52	40

**Judgement : PASS**

**(2).Composite two-wheeled trailer vibration test**

(MIL-STD-810F 514.5 Category 4- Truck/trailer/tracked-restrained cargo)

**1. Purpose**

Test based on [MIL-STD-810F 514.5 Category 4-Truck/trailer/tracked-restrained cargo-Mission/field transportation - Two-wheeled trailer]

**2. Test method**

Unit was taken directly from production line. Unit was compliant with production standards.

The performance of vibration test machine is confirmed before vibration test.

Unit is tested in random vibration conditions based on [MIL-STD-810F\_figure 514.5C-2]

&lt;MIL-STD-810F table 514.5C-VII&gt;

Break points for curves of figure 514.5C-2 Composite two-wheeled trailer vibration exposures											
Vertical				Transverse				Longitudinal			
Hz	$g^2/Hz$	Hz	$g^2/Hz$	Hz	$g^2/Hz$	Hz	$g^2/Hz$	Hz	$g^2/Hz$	Hz	$g^2/Hz$
5	0.2252	45	0.0241	5	0.0474	46	0.0039	5	0.0563	121	0.0214
8	0.5508	51	0.0114	6	0.0303	51	0.0068	6	0.0563	146	0.0450
10	0.0437	95	0.0266	7	0.0761	55	0.0042	8	0.1102	153	0.0236
13	0.0253	111	0.0166	13	0.0130	158	0.0029	13	0.0140	158	0.0549
15	0.0735	136	0.0683	15	0.0335	235	0.0013	16	0.0303	164	0.0261
19	0.0143	147	0.0266	16	0.0135	257	0.0027	20	0.0130	185	0.0577
23	0.0358	185	0.0603	21	0.0120	317	0.0016	23	0.0378	314	0.0015
27	0.0123	262	0.0634	23	0.0268	326	0.0057	27	0.0079	353	0.0096
30	0.0286	330	0.0083	25	0.0090	343	0.0009	30	0.0200	398	0.0009
34	0.0133	360	0.0253	28	0.0090	384	0.0018	33	0.0068	444	0.0027
36	0.0416	500	0.0017	30	0.0137	410	0.0008	95	0.0019	500	0.0014
41	0.0103			34	0.0055	462	0.0020				2.40 g rms
3.85 g rms				1.28 g rms							

\* See the APPENDIX B [Direction of vibration]

\* Test time is 40 minutes in each directions. (It shows road transportation of 500 miles in U.S. by composite two-wheeled trailer.)

**3. Acceptable conditions**

During vibration test,no destruction in the test unit.

After vibration test,no abnormality in the electric characteristics and the mechanism.

**4. Test result**

Model: SWS600L-5,SWS600L-12,SWS600L-24

Io=100%	Check item	From			To		
		5.01	12.07	24.05	5.01	12.06	24.04
Input voltage: AC115V	Output voltage (V)	5.01	12.07	24.05	5.01	12.06	24.04
	Efficiency (%)	75.9	80.8	82.8	75.9	80.8	82.8
	Ripple (mV)	51	40	34	52	40	38
Input voltage: AC230V	Output voltage (V)	5.00	12.07	24.05	5.00	12.06	24.04
	Efficiency (%)	78.5	83.4	85.6	78.5	83.4	85.6
	Ripple (mV)	51	40	34	52	40	38

**Judgement : PASS**

**(3).Shipboard random vibration test**  
(MIL-STD-810F 514.5 Category 10- Ship-surface ship)

**1. Purpose**


Test based on [MIL-STD-810F 514.5 Category 10-Ship-surface ship].

**2. Test method**

Unit was taken directly from production line. Unit was compliant with production standards.  
The performance of vibration test machine is confirmed before vibration test.  
Unit is tested in random vibration conditions based on [MIL-STD-810F\_figure 514.5C-15]

**Figure 514.5C-15 Shipboard random vibration exposures**

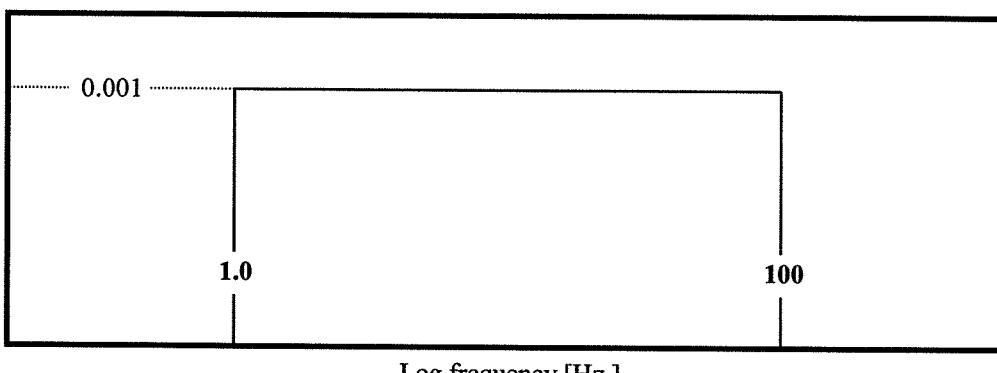Acceleration spectral density [g/Hz ]



\* See the APPENDIX B [Direction of vibration]

\* Test time is 2 hours in each directions. (vertical,transverse and longitudinal.)

**3. Acceptable conditions**

During vibration test,no destruction in the test unit.

After vibration test,no abnormality in the electric characteristics and the mechanism.

**4. Test result**

Model: SWS600L-5,SWS600L-12,SWS600L-24

Io=100%	Check item	From			To		
		5.01	12.07	24.05	5.01	12.06	24.04
Input voltage: AC115V	Output voltage (V)	5.01	12.07	24.05	5.01	12.06	24.04
	Efficiency (%)	75.9	80.8	82.8	75.9	80.8	82.8
	Ripple (mV)	51	40	34	52	40	38
Input voltage: AC230V	Output voltage (V)	5.00	12.07	24.05	5.00	12.06	24.04
	Efficiency (%)	78.5	83.4	85.6	78.5	83.4	85.6
	Ripple (mV)	51	40	34	52	40	38

**Judgement : PASS**

**(4).Functional shock test**  
(MIL-STD-810F 516.5 Procedure I)

**1. Purpose**

Test based on [MIL-STD-810F 516.5 Procedure I - Functional shock].

**2. Test method**

Unit was taken directly from production line. Unit was compliant with production standards.  
The performance of vibration test machine is confirmed before vibration test.  
Unit is operating during shock test.

Min.peak value (g's)	Duration	Qty.
40G Sawtooth pulse	11ms	5V,12V,24V models,each 1 pc

Input voltage	Output voltage	Output current
AC100V 50Hz	Rated	100%

\* See the APPENDIX B [Direction of vibration]

\* It does in the directions of  $\pm X$ ,  $\pm Y$  and  $\pm Z$  3 times for each and 18 times in total.

**3. Acceptable conditions**

During shock test,no discharge of fire or smoke, as well as no output failure.

After shock test,no abnormality in the electric characteristics and the mechanism.

**4. Test result**

Model: SWS600L-5,SWS600L-12,SWS600L-24

Io=100%	Check item	From			To		
		5.01	12.07	24.05	5.01	12.06	24.04
Input voltage: AC115V	Output voltage (V)	5.01	12.07	24.05	5.01	12.06	24.04
	Efficiency (%)	75.9	80.8	82.8	75.9	80.8	82.8
	Ripple (mV)	51	40	34	52	40	38
Input voltage: AC230V	Output voltage (V)	5.00	12.07	24.05	5.00	12.06	24.04
	Efficiency (%)	78.5	83.4	85.6	78.5	83.4	85.6
	Ripple (mV)	51	40	34	52	40	38

**Judgement : PASS**

**1. Purpose**

Test based on [MIL-STD-810F 516.5 Procedure VI - Bench handing].

**2. Test method**

Unit was taken directly from production line. Unit was compliant with production standards.

Use test bench with thickness of at least 4.25cm.

With unit switched off.

Raise until the chassis forms an angle of 45° with the bench top.

Drop unit on each face on which unit could be placed practically.

In the above test method, repeat drop 4 times in total.

**3. Acceptable conditions**

During shock test,no destruction in the test unit.

After shock test,no abnormality in the electric characteristics and the mechanism.

**4. Test result**

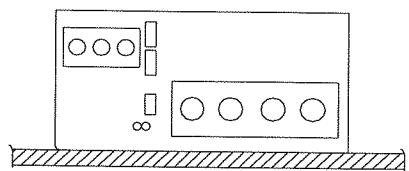


Model: SWS600L-5,SWS600L-12,SWS600L-24

Io=100%	Check item	From			To		
		5.01	12.07	24.05	5.01	12.06	24.04
Input voltage: AC115V	Output voltage (V)	5.01	12.07	24.05	5.01	12.06	24.04
	Efficiency (%)	75.9	80.8	82.8	75.9	80.8	82.8
	Ripple (mV)	51	40	34	52	40	38
Input voltage: AC230V	Output voltage (V)	5.00	12.07	24.05	5.00	12.06	24.04
	Efficiency (%)	78.5	83.4	85.6	78.5	83.4	85.6
	Ripple (mV)	51	40	34	52	40	38


**Judgement : PASS**

**APPENDIX A : List of equipment used**

EQUIPMENT USED	MANUFACTURER	MODEL NO.
TRUE RMS MULTIMETER	FLUKE	111
DIGITAL POWER METER	YOKOGAWA ELECT.	WT110
ELECTRONIC LOAD	CHROMA	63030
AC POWER SUPPLY	KIKUSUI	PCR2000L
VIBRATION MACHINE	IMV	CV-300
VIBRATION MACHINE	Shinken	G-0145
VIBRATION MACHINE	Unholtz-Dickie	SAI30-R16C
SHOCK MACHINE	NORTHWEST MACHINE.	S-015

**APPENDIX B : Direction of vibration****Mounting A****Mounting B****Mounting C**

Direction of X




Direction of Z

**Direction of X : Vertical****Direction of Y : Transverse****Direction of Z : Longitudinal**
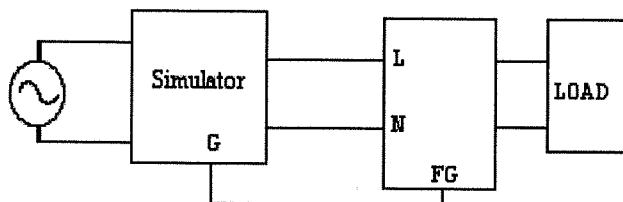
## 7. Noise simulate test

**MODEL : SWS600L-5**

### (1) Test circuit and equipment



Simulator : INS-400L      Noise Laboratory Co.,LTD

### (2) Test conditions

- |                       |   |               |                  |   |               |
|-----------------------|---|---------------|------------------|---|---------------|
| • Input voltage       | : | 115, 230VAC   | • Noise level    | : | 0V~2.0kV      |
| • Output voltage      | : | Rated         | • Phase shift    | : | 0° ~ 360°     |
| • Output current      | : | 0%, 100%      | • Polarity       | : | +, -          |
| • Ambient temperature | : | 25°C          | • Mode           | : | Normal Common |
| • Pulse width         | : | 50ns ~ 1000ns | • Trigger select | : | Line          |

### (3) Acceptable conditions

1. Not to be broken.
2. Not to be shut down output.
3. No other out of orders.

### (4) Test result

**O K**

## 8. Thermal shock test

**MODEL : SWS600L-5**

### (1) Equipment used

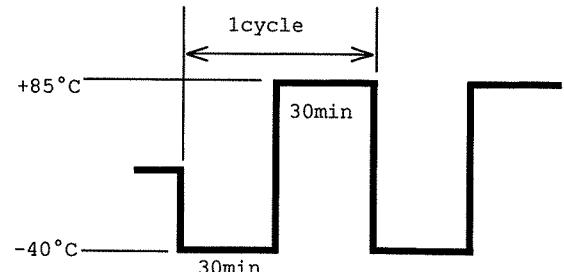
THERMAL SHOCK CHAMBER TSV-40 (TABAI ESPEC CORP.)

### (2) The number of D.U.T.(Device Under Test)

1 unit

### (3) Test Conditions

- Ambient temperature :  $-40^{\circ}\text{C} \longleftrightarrow 85^{\circ}\text{C}$
- Test time : Refer to drawing
- Test cycle : 100 cycles
- Not operating



### (4) Test Method

Before testing, check if there is no abnormal output, then put the D.U.T. in testing chamber, and test it according to the above cycle. 100 cycles later, leave it for 1 hour at the room temperature, then check if there is no abnormal output.

### (5) Test Results

**O K**

Vin : 115VAC Io : 100%		5V					
		From		To			
Ripple&Spike noise		mV		51.4		51.4	
Line regulation	Full load	mV		2		2	
Load regulation	Vin:115V	mV		6		6	
Efficiency	Pin	W	785.3	76.57%	785.0	76.59%	
	Vout	V	5.011		5.010		
Iout		A	120		120		
Solder condition • etc.				—		OK	

## 9. Fan life expectancy

MODEL: SWS600L

(1) Part name

9A0612G4D041( SANYO DENKI CO.)

(2) Life expectancy

The data shows fan life expectancy for fan only by manufacture (90% survival rate).

Fig1 shows measuring point of ambient temperature.

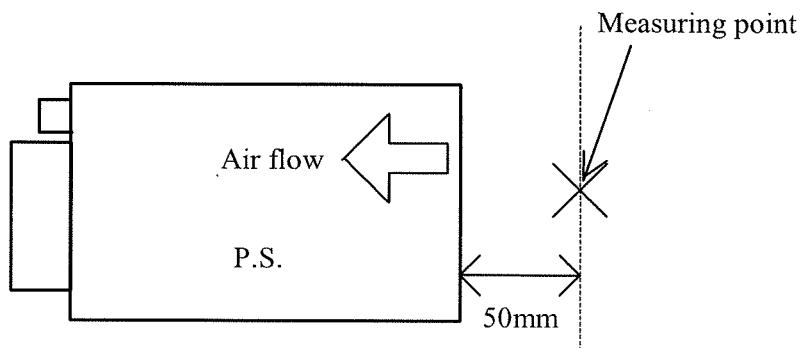
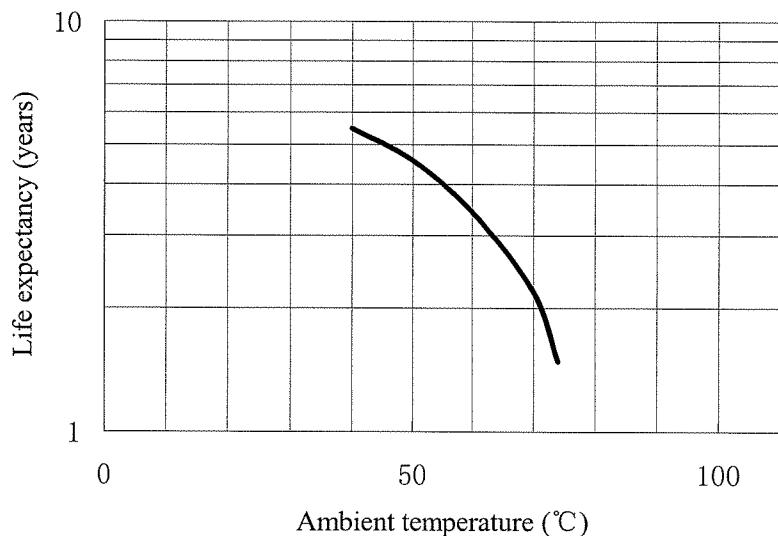


Fig1. Measuring point of ambient temperature.

$$1\text{year} = 365 \text{ day} \times 24 \text{ hours/day} = 8760 \text{ hours}$$