


Specifications																					
Model	Transistor Type	Rated Voltage	Operating Voltage Range	Power Consumption	Sound Level	Operating Temperature Range	Max.Playback Time	Playback Channels	Protection Rating	Mass	Front Cover Color	Recorded Data									
BSV-24NM-W	NPN Transistor	12-24V DC	10.8V DC to 26.4V DC	Max. 3.5W	Max. 87dB (at 1m) 1kHz Sine Wave	-10°C to +50°C (RH 85% or less)	63 sec.	4 (Bit Input) 15 (Binary Input) *When using the Sound Reduction Function, the inputs become: 3 (Bit Input) 7 (Binary Input)	IP54 (Only for Panel Mount in the Upright Position)	100g ±10%	Off-white	Voice									
BSV-24NM-D											Dark Gray										
BSV-24NM-S											Silver										
BSV-24N-W											Off-white		Alarm								
BSV-24N-D											Dark Gray										
BSV-24N-S	Silver																				
BSV-24PM-W	PNP Transistor										12-24V DC	10.8V DC to 26.4V DC	Max. 3.5W	Max. 87dB (at 1m) 1kHz Sine Wave	-10°C to +50°C (RH 85% or less)	63 sec.	4 (Bit Input) 15 (Binary Input) *When using the Sound Reduction Function, the inputs become: 3 (Bit Input) 7 (Binary Input)	IP54 (Only for Panel Mount in the Upright Position)	100g ±10%	Off-white	Voice
BSV-24PM-D																				Dark Gray	
BSV-24PM-S																				Silver	
BSV-24P-W																				Off-white	
BSV-24P-D		Dark Gray																			
BSV-24P-S	Silver																				
SPB-2E-W	—	Rated Input	Impedance	Output Sound Level																	
SPB-2E-D	—	2W	8Ω	87dB (at 1m) * Panel Mounted																	
SPB-2E-S	—																				

**BSV-24** Slim Model MP3 Voice Annunciator  
 ① Transistor Type  
 N : NPN Transistor  
 P : PNP Transistor  
 ② Registered Messages  
 Blank : None (15 Alarm Sounds)  
 M : Pre-recorded Messages  
 ③ Front Cover Color  
 W : Off-white  
 D : Dark Gray  
 S : Silver

**SPB-2E** Slim Speaker  
 ③ Front Cover Color  
 W : Off-white  
 D : Dark Gray  
 S : Silver

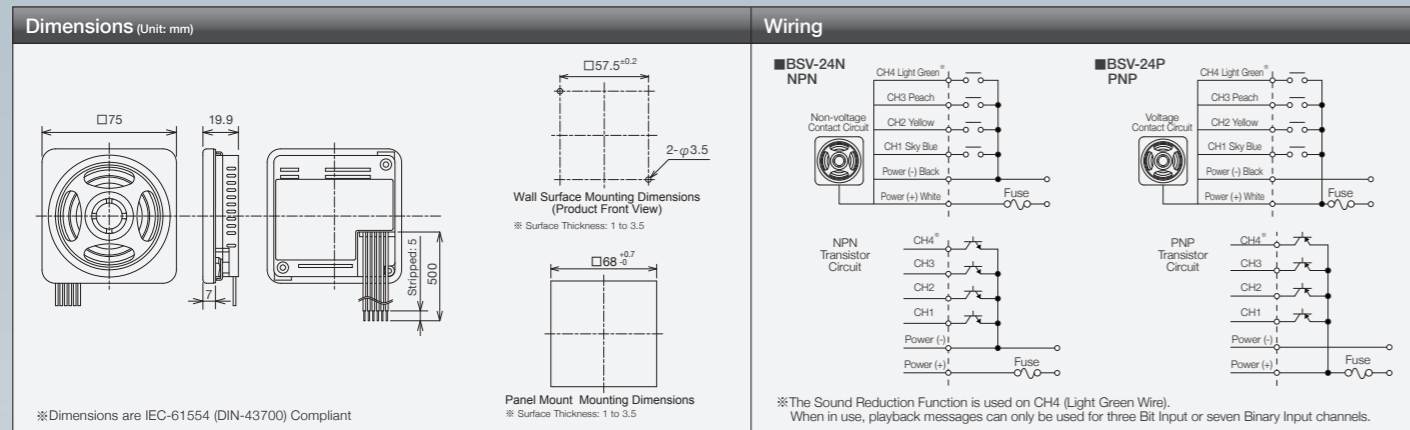

**Color Variation**

Off-white      Dark Gray      Silver

**MP3**    **87dB (at 1m)**    **63 Second Playback**    **PNP Transistor**    **NPN Transistor**

**IP54**    **RoHS**    **CE**    **Pending UL Certification**    **SPB-2E**  
 Slim-style Speaker Unit also available.

※ Wall mounted protection rating: IP20

**PATLITE Corporation**  
 International Division  
 8-8, Matsuyamachi, Chuo-ku, Osaka, Japan 542-0067 TEL.+81-6-6763-8220 FAX.+81-6-6763-8221

**PATLITE (U.S.A.) Corporation**  
 20130 S. Western Ave., Torrance, CA 90501, U.S.A TEL.+1-310-328-3222 FAX.+1-310-328-2676

**PATLITE Europe GmbH**  
 Am Soeldnermoos 8, D-85399 Hallbergmoos, Germany TEL.+49-811 9981 9770-0 FAX.+49-811 9981 9770-9

**PATLITE (SINGAPORE) PTE LTD**  
 No.2 Leng Kee Road, #05-01 Thye Hong Centre, Singapore 159086 TEL.+65-6226-1111 FAX.+65-6324-1411

**PATLITE (CHINA) Corporation**  
 Room 512, Juteng Business Building, No.697-3 Lingshi Road, Shanghai China 200072 TEL.+86-21-6630-8969 FAX.+86-21-6630-8938

**PATLITE KOREA CO., LTD.**  
 202 Seokwang Bldg, 1361-9 Seocho-dong, Seocho-gu, Seoul, 137-863 Korea

<http://www.patlite.com>    E-mail: [overseas@patlite.co.jp](mailto:overseas@patlite.co.jp)

1232A    1102 H(H)/H(S)A

**Option**

**Memory card to store MP3 data & rewrite operation mode**  
 ■ SD Card SDV-128P

Playlist or message data are not contained in the SD card. An extra fee is required to add playlist or message data. Since the cost reflects the message content or capacity, please inquire first for an estimate.

**Adding/Changing a message is easier with the editing tool**  
 ■ PATLITE Playlist Editor (Free Software Version)

Adding, editing or changing messages is easier with the PATLITE Playlist Editor. (Compatible OS: Windows® 2000/XP/Vista)

※Windows is a trademark of Microsoft Corporation of the US and other countries.  
 ※Patlite Corporation is a member of the SD Card Association.  
 ※The "PATLITE" name and "PATLITE" symbol are trademarks of PATLITE Corporation.

**CAUTION**

To ensure correct use of these products, read the "Instruction Manual" prior to use. Failure to follow all safeguards can result in fire, electric shock, or other accidents. Specifications are subject to change without notice.

**PATLITE ECO PROJECT**

For the benefit of mankind and the earth, Patlite is committed to developing environmentally friendly products.



Thickness **19.9mm**

**UNBELIEVABLY Thin**

Slim Model MP3 Voice Annunciator

Slim Model MP3 Voice Annunciator **BSV**

Off-white      Dark Gray      Silver

**IP54**    **RoHS**    **CE**    **Pending UL Certification**


※ Wall mounted protection rating: IP20

# Thickness 19.9mm UNBELIEVABLY Thin Design



## Space-saving for equipment


Our thinnest to match the miniaturization of production line equipment, with a compact design having a depth of only 19.9mm. A maximum sound of 87 dB (at 1m) can be reached with such a thin shape. The volume adjustment is easily accessible from the front panel, and a low power of 3.5W (max.) takes an extra load off the power supply.

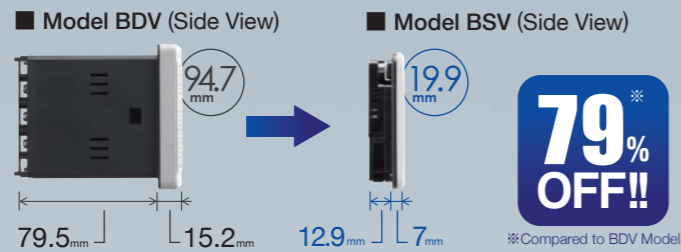

## A flexible front design

The front design, with a bold-faced composition, adopts a simple style to harmonize with any layout, from a production site to a public location. Moreover, the speaker structure is designed to allow water to drain, so it can be exposed to environments such as rainshowers.

# From the Front, Easy Installation

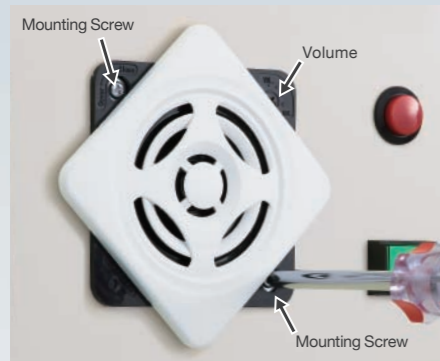

## Sharp Reduction in Labor

With only the need to access it from the front, the cover is easily removable for installation and volume adjustment, which can reduce labor time for maintenance, etc.



Simply turn the bracket to lock it!


- Panel Mount
- Wall Mount



## Two choices for installation



Actual Size (Front View)

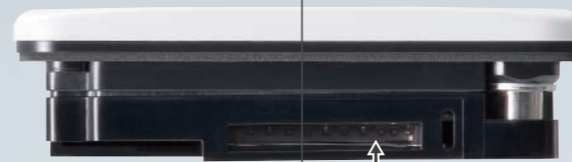

Actual Size (Bottom View)  
SD Card Slot

# Built-in Sound Reduction Function

Reduces Noise Pollution

Normal Operation  
(Emergency during daytime, etc.)



Without Sound Reduction: Max. 87dB

Sound Reduction Function  
(While on standby, during night time, etc.)



With Sound Reduction: from -1 to -50 dB reduction possible

Changing the playback sound level can be done in conjunction with the environmental condition. Proper use of the sound level in correspondence to the environment, such as using a more subtle sound level for an emergency during the night, can be done. In addition, if a loud sound is used only when required, it can help reduce power dissipation.

\*When the Sound Reduction Function is used, playback messages can only be used for three Bit Input Channels or seven channels for the Binary Input mode.


# No Special Application Software Needed Message Rewriting



An SD card slot is designed into the unit to allow writing and re-writing of messages by changing MP3 file names or data. The data for setting the operation mode and setting the sound reduction volume can also be re-written. The SD Card can be programmed with or without special application software.

\*SDV-128P option is recommended. Using other SD cards is not guaranteed for proper operation.

The method for data rewriting when not using the exclusive application software:

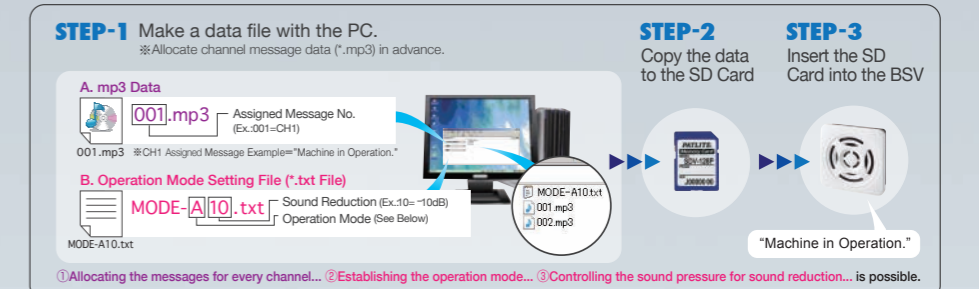

When using the exclusive application software, the combination of adjusting the volume of a message or separately making a volume adjustment is possible.

Maximum of 15 Playback Messages (Model BSV-M)

Special order messages require an extra fee.

Standard 15 Sound Alarm (Model BSV)

The following is the 15 available sounds:

No.1	Chime	No.2	Beep	No.3	Stutter	No.4	Bell	No.5	Yelp
No.6	Rapid Hi Lo	No.7	Melody Chime	No.8	Synthesized Piano	No.9	Synthesized Bell	No.10	Stutter + Bell
No.11	Synthesized Melody	No.12	Call Sign	No.13	Inverted Reveille	No.14	Galactic Motor	No.15	Two Tone

\*if written over, all the standard 15 sounds will be erased.

Diverse Operational Modes

There are eight operation modes selectable from A through H which, in combination with commands, can select the functions below:

Operating Mode							
A	Bit Input/Normal Playback	C	Bit Input/Hold Playback	E	Binary Input/Normal Playback	G	Binary Input/Hold Playback
B	Bit Input/Priority Input Playback	D	Bit Input/Memory Playback	F	Binary Input/Priority Input Playback	H	Binary Input/Memory Playback

\*Changing the Operational Mode requires an SD card (SDV-128P option is recommended). Using other SD cards is not guaranteed for proper operation.

Normal Playback	The message is played back in conjunction with the input. With a oneshot input, play back the message only once and repeat it with the input held on.	Priority Input Playback	If the next voice message input is turned on while the current message is in playback, the next message will be played back and the current message will playback after the input is turned off.
Hold Playback	While the input is held on, the voice message playback is possible. When the input is released, the voice message playback stops.	Memory Playback	A maximum of 15 voice messages can be stored in memory in order of priority. When the playback voice message ends, the next message in memory will be played. Inputs that exceed the maximum memory becomes invalid.