Features

Switching

Regulator

• Efficiency up to 96%, no need for heatsinks!

- Build-in Diode Protection Circuit
- Low Profie (LxWxH= 11.5 x 8.5 x 17.5mm)
- Continuous Short Circuit Protection
- RoHS compliant
- IEC/EN-60950 Certified

RECON **DC/DC** Converter

R-78W-0.5

0.5 AMP SIP3 **Single Output**



Description

The R-78W series offers wired 0.5A switching regulators which are ideally suited to offer a stable voltage supply without the need for a PCB for applications like high power LED lighting, battery powered systems, cooling systems, or fans. Due to the high efficiencies of up to 96% there is no need for a heat sink. The compact modules feature fully protected outputs and draw only 1mA under no load conditions.

Selection Guide					
Part Number	Input Voltage Range (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency @ min. Vin (%)	Max. Capacitive Load ⁽¹⁾ (µF)
R-78W3.3-0.5	6.5 - 32	3.3	500	88	220
R-78W5.0-0.5	6.5 - 32	5.0	500	93	220
R-78W9.0-0.5	11 - 32	9.0	500	95	220
R-78W12-0.5	15 - 32	12.0	500	96	220

Notes:

Note1: 6800µF with <1sec start-up time







Specifications (measured at TA= 25°C, full load, nominal input voltage and after warm-up)

BASIC CHARACTERISTICS				
Parameter	Condition	Min.	Тур.	Max.
Input Voltage Range		6.5VDC	24VDC	32VDC
Output Current (2)		6mA		500mA
Quiescent Current	0% Load		5mA	7mA
Internal Operating Frequency		280kHz	330kHz	380kHz
Efficiency	see Selection Guide			
Internal Power Dissipation				0.4W
Output Ripple and Noise	20MHz BW limited		50mVp-p	75mVp-p

Notes:

Operation under no load will not damage the device, however they may not meet all specifications. A minimum load of 6mA is recommended.

IEC-60950-1 Certified EN-60950-1 Certified

REGULATIONS			
Parameter	Condition	Туре	Value
Output Accuracy		all models	±2% typ. / ±3% max.
Line Voltage Regulation	low line to high line, full load	3.3V, 5V 9V, 12V	±0.2% typ. / ±0.4% max. ±0.1% typ. / ±0.2% max.
Load Voltage Regulation	10% to 100% load	3.3V, 5V 9V, 12V	±0.4% typ. / ±0.6% max. ±0.25% typ. / ±0.4% max.
Transient Response	50% - 100% Load, Δlo/Δt 25mA/μs 10% - 100% Load, Δlo/Δt 25mA/μs	all models	±75mV typ. ±100mV max.




R-78W-0.5

Series

Specifications (measured at TA= 25°C, full load, nominal input voltage and after warm-up)

PROTECTIONS Parameter Type Value Short Circuit Protection (SCP) continuous, automatic recovery


Reverse Current Protection:

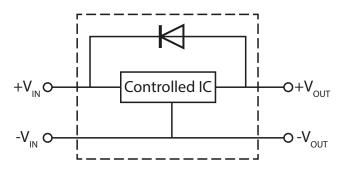

An internal blocking diode can prevent reverse current flow backwards into the output, as this can damage the converter when it is powered down.

ENVIRONMENTAL Parameter Condition Value Operating Temperature Range with derating -40°C to +85°C Maximum Case Temperature +100°C 0.015%/°C Temperature Coefficient -40°C to +85°C ambient Thermal Impedance 70°C/W typ. surface of case Humidity 95%, RH max. non-condensing MTBF 9368 x 103 hours

Derating Graph

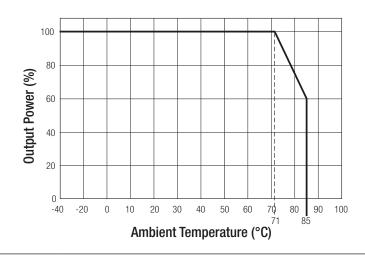

SAFETY AND CERTIFICATIONS			
Certificate Type	Report / File Number	Standard	
IEC General Safety	LVD1407030-1	IEC-60950-1, 2nd Edition, 2009	
EN General Safety	LVD1407030-1	EN-60950-1, 2nd Edition, 2011	




R-78W-0.5

Series

Specifications (measured at TA= 25°C, full load, nominal input voltage and after warm-up)

DIMENSION and PHYSICAL CHARACTERISTICS		
Parameter	Value	
Case Material	non-conductive black plastic (UL94-V0)	
Potting Material	epoxy (UL94-V0)	
Package Dimension (LxWxH)	17.5 x 11.5 x 8.5mm	
Package Weight	4.8g typ.	

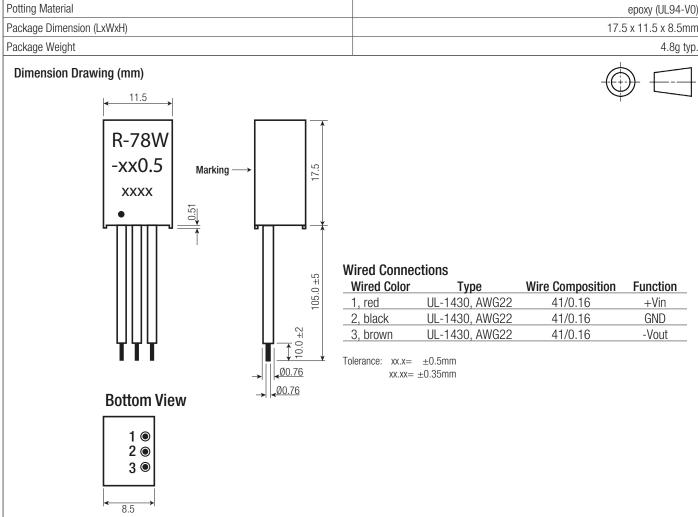

PACKAGING INFORMATION			
Parameter	Туре	Value	
Packaging Dimension (LxWxH)	Cardboard Box	140 x 130 x 65mm	
Packaging Quantity (3)		25pcs.	
Storage Temperature Range		-55°C to +125°C	
	Notes:		
	Note3: 5 bubble packs each containing 5pcs in a cardboard I	box.	

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

www.recom-power.com REV.: 1/2016 PA-3