



Connectors > RF Coax Connectors > RF Connectors



RF Interface: **BNC**

RF Connector Style: **Plug**

RF Connector Mated Outer Diameter (Approximate): **14.53 mm [.572 in]**

Impedance: **75 Ω**

Compatible With RF Cable Type: **JIS 3C-2V**

Features

Product Type Features

RF Interface	BNC
RF Connector Style	Plug
Compatible With RF Cable Type	JIS 3C-2V
Connector System	Cable-to-Cable
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Connector Seal Type	Gasket

Configuration Features

Number of Positions	1
Number of Coaxial Contacts	1

Electrical Characteristics

Impedance	75 Ω
-----------	------

Body Features

Body Insulation	Without
Body Shape	Circular
Cable Connector Orientation	Straight
Body Material	Brass
Body Material Finish	Passivated
Body Plating Material	Nickel



Contact Features

RF Connector Center Contact Underplating Material	Nickel
	1080 μin
Crimp Type	Hex
RF Connector Center Contact Plating Material	Gold
RF Connector Center Contact Material	Brass

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

RF Connector Coupling Mechanism	Bayonet
Connector Mounting Type	Cable Mount (Free-Hanging)
RF Contact Captivation Method	Mechanical
Detent	With

Dimensions

RF Connector Mated Outer Diameter (Approximate)	14.53 mm[.572 in]
---	-------------------

Usage Conditions

Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
-----------------------------	---------------------------

Operation/Application

Operating Frequency	2 GHz
---------------------	-------

Packaging Features

Packaging Quantity	25
Packaging Method	Carton

Other

Grade	Commercial
Coupling Nut Base Material	Brass
Dielectric Material	Polymethylpentene

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold



EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JAN 2021 (211)
Candidate List Declared Against: JAN 2021 (211)
SVHC > Threshold:
Pb (3.7% in Component part)
Article Safe Usage Statements:
Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content

BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.

Solder Process Capability

Not applicable for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

 TE Part # CAT-076-BNCJKRA75C BNC RF Connector: Male (Jack), Right-angle, 75 Ohm	 TE Part # CAT-076-BNCJKRA752 BNC RF Connector: Male (Jack), Right-angle, 75 Ohm, 2 Ghz	 TE Part # 5413589-8 KIT,PLUG,COML BNC,HEX CRP	 TE Part # 5-1634503-3 BNC Str PCB Skt 75Ohm Nickel Plt'd
 TE Part # 5222132-1 JACK,VERTICAL,PCB,75 OHM,BNC	 TE Part # 5221199-5 JACK,75 OHM COML BNC	 TE Part # 5414094-2 JACK,DECOUPLER,R/A,75 OHM, BNC	 TE Part # 6274291-1 JACK,PCB,COML BNC, 75OHM

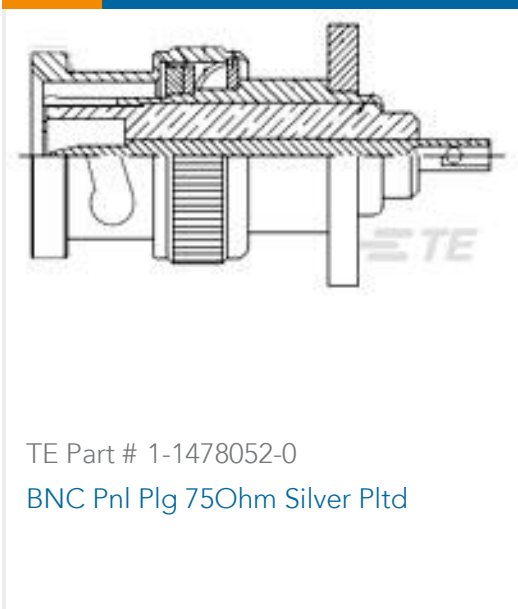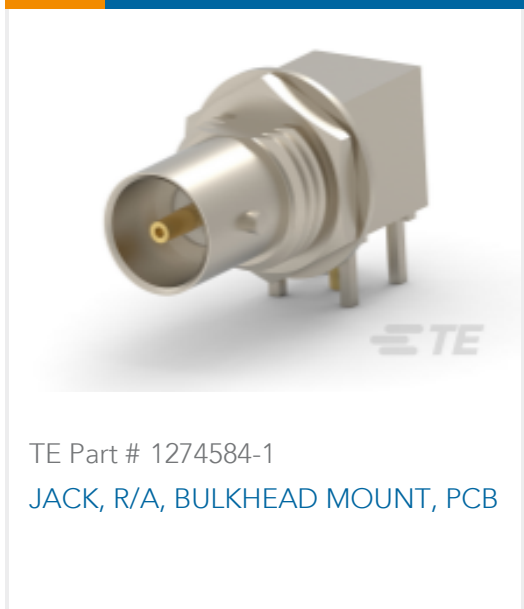

Customers Also Bought

Documents

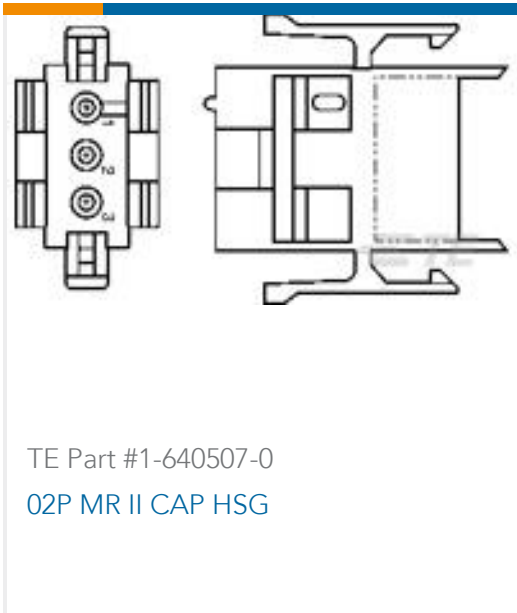

Product Drawings

KIT PLUG 75 OHM BNC HEX CRIMP

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-5413589-1_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-5413589-1_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-5413589-1_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

BNC Connectors

English

Product Specifications

Application Specification

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Instruction Sheets

Instruction Sheet (U.S.)

English