

EN Read the entire instruction manual before you start installation and assembly. If you have any questions regarding any of the instructions or warnings, please contact your local distributor for assistance.

**CAUTION:** Use with products heavier than the rated weights indicated may result in instability causing possible injury.

- Please closely follow the assembly instructions. Improper installation may result in damage or serious personal injury.
- Safety gear and proper tools must be used. This product should only be installed by professionals.
- Make sure that the supporting surface will safely support the combined weight of the equipment and all attached hardware and components.
- Use the mounting screws provided and **DO NOT OVER-TIGHTEN** mounting screws.
- This product contains small items that could be a choking hazard if swallowed. Keep these items away from children.
- This product is intended for indoor use only. Using this product outdoors could lead to product failure and personal injury.

**IMPORTANT:** Ensure that you have received all parts according to the component checklist prior to installation. If any parts are missing or faulty, contact your place of purchase for a replacement.


**MAINTENANCE:** Check that the product is secure and safe to use at regular intervals (at least every three months).

## Instruction Manual

# HEAVY-DUTY MONITOR ARM

With Docking Station

Item No.: 2626620(SP-MM-820)

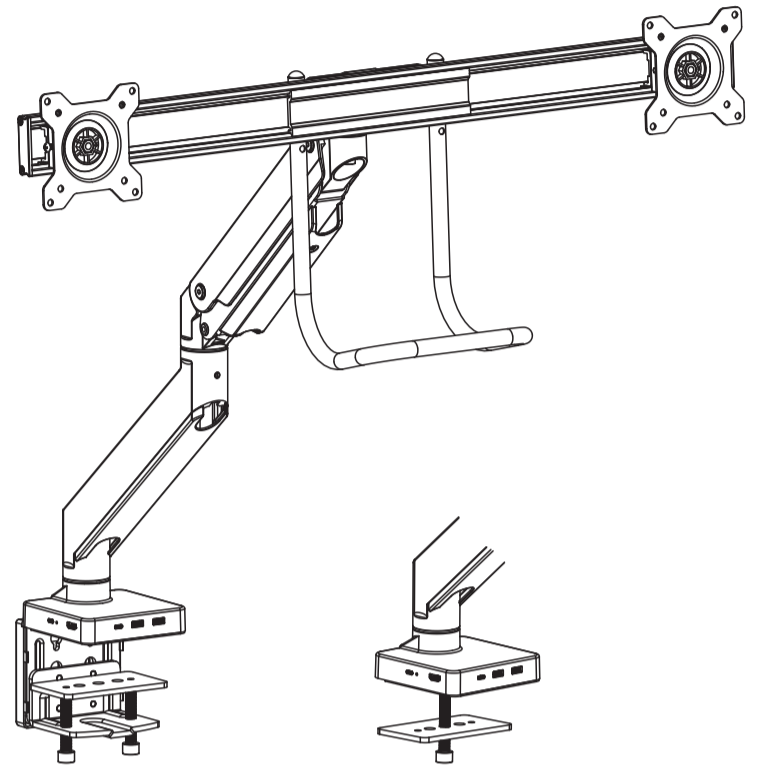

VESA Compatible  
75x75 100x100

81.3cm  
MAX  
FLAT/CURVED

(1-8kg)  
XZ  
RATED

**7**

To properly balance the arm with monitor mounted, adjust the spring tension using the supplied Allen Key as follows:

First, position and firmly hold the arm horizontally as shown. Ask for assistance should you require it.

If the arm **drops**, turn the adjustment screw counter-clockwise until it stays in a horizontal position.

If the arm **rises**, turn the adjustment screw clockwise until it stays in a horizontal position.

**CAUTION:** To avoid damage to monitor or mount, always keep the arm in a horizontal position while making adjustments. Again, ask for assistance if required.

**CAUTION:** **DO NOT** over tighten the screws.

**8**

**CAUTION:** **DO NOT** rotate monitor arms rear edge of desk to avoid an unstable situation may cause tipping.

**9**

**10**

**Note:** If the display does not stop at your desired position, tighten the screws as shown.

**11**

<b>1</b>	<b>100W PD Port</b>	PD charging up to 100W for dock station
<b>2</b>	<b>Power Light</b>	The light is on when powered
<b>3</b>	<b>HDMI Port</b>	This HDMI port supports media display with resolutions up to 4K@60Hz
<b>4</b>	<b>USB-C® Upstream Port</b>	Connects full featured TYPE-C® cable (S) to laptop; Supports laptop charging at 87W max
<b>5</b>	<b>USB-A Downstream Port</b>	USB 3.1 Gen 1(5V, 0.9A max)
<b>6</b>	<b>RJ45 Ethernet Port</b>	Gigabit Ethernet. Transfer rate 10Mbit/100Mbit/1Gbit

**12**

