

DECOCLIC – Downlight

Instruction Manual



TECHNICAL SPECIFICATION

Model Number	MT75200 MT75210	MT75201 MT75211	MT75202 MT75212	MT75203 MT75213
Color	White	Brushed steel	Matt silver	Chrome
Cut-Out	68mm	68mm	68mm	68mm
Wattage	up to 50W	up to 50W	up to 50W	up to 50W
IP Rating	IP20	IP20	IP20	IP20
Tiltable	30°	30°	30°	30°


CAUTIONS:

- Read the entire manual carefully before installation and operation.
- Installation should be performed only by licensed and qualified electricians.
- Switch off the power source before installation, replacement and cleaning.
- Wearing gloves during installation is recommended, to ensure the luminaire is kept in the best condition.
- Before replacement of the luminaire, turn it off and allow it to cool down.
- In case the external flexible power cord is damaged, the replacement should be handled by a licensed and qualified electrician for safety purpose.
- The luminaire is not suitable for covering with thermally insulated material.
- The minimum safety distance from the illuminated object is 0,5m.
- The manufacturer accepts no liability for any damage resulting from the misuse of the luminaire, or from when it is used with inappropriate equipment.
- Consult your dealer if you have any inquiries.

ATTENTION:

- The MEGATRON® DECOCLIC is designed for indoor recessed ceiling installation.
- Do not use with cool beam halogen lamps.

SAFETY DISTANCE:

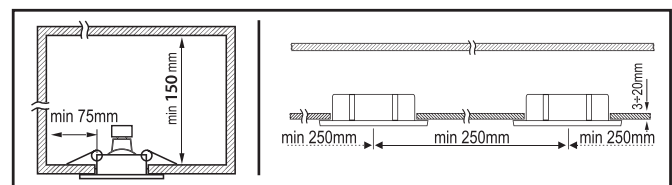

INSTALLATION:

1. **OFF**

2.

Ø68mm
IP20

3a.

12V Low Voltage
MR16
GU5.3

Snap-in

Use for all connections solely HO3VVH2-F x 0,75mm cable.
Use solely low voltage halogen lamps conform with EN60598. The lamps must be eligible for use in open luminaires.

3b.

220-240V~ High Voltage
PAR16
GU10

Snap-in

Use high voltage connection box with cable relief – model number: MT75209

220-240V~

4.

Correct disposal of this product

This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

