


Installation

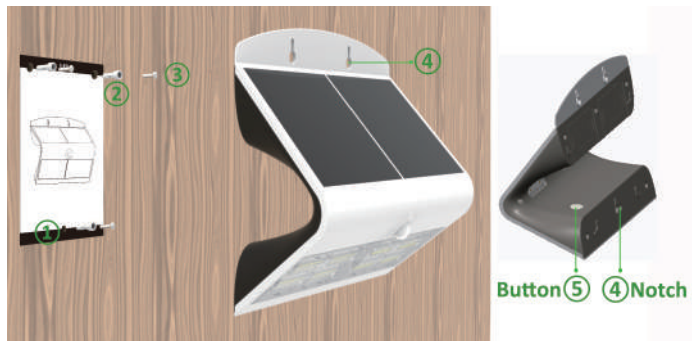

1. Please use the card to measure hole position correctly and drill 3 holes.
2. Fix 3 expansion plugs into the holes.
3. Fix 3 screws into the expansion plugs with a spare space.
4. Insert the notch to the lower screw and fasten the whole lamp well.
5. Press the back button to adjust to the demanded working mode.

Notice

1. Pls install this light onto flat surface directionally to get enough solar.
2. The lamp will light up when the environmental brightness is less than 30lux.
3. Inside battery is replaceable, 18650 Li-ion battery, 2*2000mAh/3.7V.
4. Lamp need to be installed 2-4Mtr from the ground.

V-TAC[®]

INNOVATIVE LED LIGHTING

INSTRUCTION MANUAL



V can do more than the sun



Model: VT-767-7


Please read and follow all instructions to operate.
Save this manual for future reference.

WEEE Number:80133970

Specification

SKU	8278/8279
Power/Lumen	7W / 800LM
LEDs	SMD2835*60PCS
Li-ion Battery	2*2000mAh/3.7V, 18650 Replaceable
Solar Panel	4.4Wp, Mono-crystalline silicon
Working Mode	3 different lighting modes
Detection Angle/Area	120° / 2-6Mtr
Visible Distance	6-7Mtr
IP Degree	IP 65
Lifespan	35,000hrs
Installation Height	2-4Mtr

Features

 ZERO Electricity Cost

 Solar Powered



 PIR Detective

 Light on/off automatically

 Outdoor

 Cordless

Working Modes

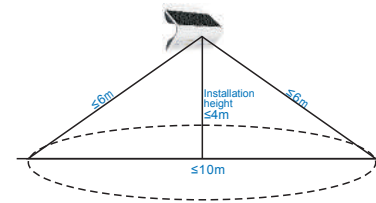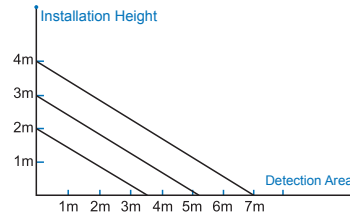

Pls press the Button to adjust to different working mode:

Press 1st time for Mode A. Press 2nd time for Mode B.
Press 3rd time for Mode C. Press 4th time for off.



Mode A: Automatically turns on at the dusk (<30lux) and remains 20% bright, up to 5 hours after which it turns off.



Mode B: Automatically turns on to full brightness (800lm) when motion is detected in the range ≤6 mtrs and then turns to 3% brightness in 20 seconds of no motion.



Mode C: Automatically turns on to full brightness (800lm) when motion is detected in the range ≤6 mtrs and then turns off in 30 seconds of no motion.