

Time switches 16 A



Heating and
cooling



Shop displays



Lighting for
parks



Streetlights
and car park
lighting



School bells



12
SERIES

Mechanical time switches

- Daily time setting*
- Weekly time setting**

Type 12.01

- Daily
- 1 CO 16 A
- 35.8 mm wide
- 35 mm rail mount

Type 12.11

- Daily
- 1 NO 16 A
- 17.5 mm wide
- 35 mm rail mount

Type 12.31-0000

- Daily
- 1 CO 16 A
- 72 x 72 mm
- Front panel mount

Type 12.31-0007

- Weekly
- 1 CO 16 A
- 72 x 72 mm
- Front panel mount

- Minimum time interval setting:
1 h (12.31-0007)
30 min (12.01)
15 min (12.11 - 12.31-0000)

* Same program every day


** Different program possible for each of the 7 days of the week

For outline drawing see page 15

12.01



- Mechanical daily time switch
- 1 CO 16 A
- 35 mm rail (EN 60715) mount



12.11




- Mechanical daily time switch
- 1 NO 16 A
- 35 mm rail (EN 60715) mount



12.31



- Mechanical daily or weekly
- 1 CO 16 A
- Front panel mounting



Contact specification

Contact configuration	1 CO (SPDT)	1 NO (SPST-NO)	1 CO (SPDT)
Rated current/Maximum peak current	A	16/—	16/—
Rated voltage/Maximum switching voltage	V AC	250/—	250/—
Rated load AC1	VA	4000	4000
Rated load AC15 (230 V AC)	VA	750	420
Nominal lamp rating:			
incandescent (230 V) W	2000 (NO contact)	2000	2000
compensated fluorescent (230 V) W	750 (NO contact)	750	750
uncompensated fluorescent (230 V) W	1000 (NO contact)	1000	1000
halogen (230 V) W	2000 (NO contact)	2000	2000
Minimum switching load	mW (V/mA)	1000 (10/10)	1000 (10/10)
Standard contact material	AgSnO ₂	AgSnO ₂	AgSnO ₂

Supply specification

Nominal voltage (U _N)	V AC (50/60 Hz)	230	230	120 - 230
	V DC	—	—	—
Rated power AC/DC	VA (50 Hz)/W	2/—	2/—	2/—
Operating range	AC (50 Hz)	(0.85...1.1)U _N	(0.85...1.1)U _N	(0.85...1.1)U _N
	DC	—	—	—

Technical data

Electrical life at rated load in AC1	cycles	50 · 10 ³	50 · 10 ³	50 · 10 ³
Type of time switch		daily	daily	daily weekly
Switching intervals /day		48	96	96 24 (168/week)
Minimum switching interval	min	30	15	15 60
Accuracy	s/day	1.5	1.5	1.5
Ambient temperature range	°C	-5...+50	-5...+50	-10...+50
Protection category		IP 20	IP 20	IP 20

Approvals (according to type)



Type 12.51

Digital (analogue-style) time switch, daily/weekly programming

- Can be programmed in "Classic" mode via the joystick, or "Smart" mode via smartphones with NFC communication
- Minimum time interval setting - 30 minutes
- Easily configurable for daily or weekly programming

Type 12.81

Digital Astro-switch

- Can be programmed in "Classic" mode via the joystick, or "Smart" mode via smartphones with NFC communication
- Astro program: calculation of sunrise and sunset times through date, time and location coordinates
- Option for Astro ON period override, by timeswitch
- Location coordinates easily settable for most European countries through post codes
- Offset function: allows programming of switching times offset from the astronomic time (by up to 90 min, in 10 min steps)
- Summer/Winter European, Australian, Brazilian time
- 1 CO 16 A output contact
- LCD status indication, set-up and programming
- Lock with a 4-digit PIN
- Back-light display
- Internal battery for set-up and programming without supply, easily replaceable from the front
- Protective separation between supply and contacts
- 35 mm wide
- 35 mm rail (EN 60715) mount
- Cadmium free contact material


For outline drawing see page 15

Contact specification

Contact configuration	1 CO (SPDT)	1 CO (SPDT)
Rated current/Maximum peak current	A	16/30 (120 A - 5 ms)
Rated voltage/ Maximum switching voltage	V AC	250/400
Rated load AC1	VA	4000
Rated load AC15 (230 V AC)	VA	750
Nominal lamp rating:		
230 V incandescent/halogen W	2000	2000
fluorescent tubes with electronic ballast W	1000	1000
fluorescent tubes with electromagnetic ballast W	750	750
CFL W	400	400
230 V LED W	400	400
LV halogen or LED with electronic ballast W	400	400
LV halogen or LED with electromagnetic ballast W	800	800
Minimum switching load	mW (V/mA)	1000 (10/10)
Standard contact material	AgSnO ₂	AgSnO ₂
Supply specification		
Nominal voltage (U _N)	V AC (50/60 Hz)	110...230
	V DC	110...230
Rated power AC/DC	VA (50 Hz)/W	2.8/0.9
Operating range	V AC (50 Hz)	88...264
	V DC	88...264
Technical data		
Electrical life at rated load in AC1	cycles	100 · 10 ³
Switching intervals		48
Minimum switching interval	min	30
Accuracy	s/day	1
Communication protocol		NFC
Ambient temperature range	°C	-20...+50 (see page 10, diagram L12)
Protection category		IP 20
Approvals (according to type)		

NEW 12.51

- Digital time switch
- 1 CO 16 A

**NEW 12.81**

- Digital Astro-switch
- 1 CO 16 A



Digital time switch, weekly programming
 - Can be programmed in "Classic" mode via the joystick, or "Smart" mode via smartphones with NFC communication

Type 12.61

- 1 CO 16 A

Type 12.62

- 2 CO 16 A

- Functions:
Switch ON, Switch OFF
Pulse: 1s...59 min
- Minimum time interval setting - 1 minute
- Summer/Winter European, Australian, Brazilian time
- LCD status indication, set-up and programming
- Lock with a 4-digit PIN
- Back-light display
- Internal battery for set-up and programming without supply, easily replaceable from the front
- Protective separation between supply and contacts
- 35 mm wide
- 35 mm rail (EN 60715) mount
- Cadmium free contact material

For outline drawing see page 16

Contact specification

Contact configuration	1 CO (SPDT)	2 CO (DPDT)
Rated current/Maximum peak current	A 16/30 (120 A - 5 ms)	16/30 (120 A - 5 ms)
Rated voltage/ Maximum switching voltage	V AC 250/400	250/400
Rated load AC1	VA 4000	4000
Rated load AC15 (230 V AC)	VA 750	750
Nominal lamp rating:		
230 V incandescent/halogen W	2000	2000
fluorescent tubes with electronic ballast W	1000	1000
fluorescent tubes with electromagnetic ballast W	750	750
CFL W	400	400
230 V LED W	400	400
LV halogen or LED with electronic ballast W	400	400
LV halogen or LED with electromagnetic ballast W	800	800
Minimum switching load	mW (V/mA) 1000 (10/10)	1000 (10/10)
Standard contact material	AgSnO ₂	AgSnO ₂

Supply specification

Nominal voltage (U _N)	V AC (50/60 Hz)	12...24	110...230	110...230
	V DC	12...24	110...230	110...230
Rated power AC/DC	VA (50 Hz)/W	2.8/0.9		2.8/0.9
Operating range	V AC (50 Hz)	10...30	88...253	88...253
	V DC	10...30	88...253	88...253


Technical data

Electrical life at rated load in AC1	cycles	100 · 10 ³	100 · 10 ³
Type of time switch		Weekly	Weekly
Memory locations for switching times		50	50
Minimum internal setting	min	1	1
Accuracy	s/day	1	1
Communication protocol		NFC	NFC
Ambient temperature range	°C	-20...+50 (see page 10, diagram L12)	-20...+50 (see page 10, diagram L12)
Protection category		IP 20	IP 20


Approvals (according to type)



- Weekly programming
- 1 CO 16 A
- Switch ON, Switch OFF, Pulse



- Weekly programming
- 2 CO 16 A
- Switch ON, Switch OFF, Pulse



Weekly Astro time switch

- Can be programmed in "Classic" mode via the joystick, or "Smart" mode via smartphones with NFC communication
- "Astro" program: calculation of sunrise and sunset times through date, time and location coordinates

Type 12.A1

- 1 CO 16 A

Type 12.A2

- 2 CO 16 A

Type 12.B2

- 2 CO 16 A

- Functions:
"Astro" ON, "Astro" OFF
Switch ON, Switch OFF
Pulse: 1s...59 min
- Location coordinates easily settable for most European countries through Post codes
- Offest function: allows programming of switching times offset from the astronomic time (by up to 90 min, in 1 min step)
- Minimum time interval setting - 1 minute
- Summer/Winter European, Australian, Brazilian time
- LCD status indication, set-up and programming
- Lock with a 4-digit PIN
- Back-light display
- Internal battery for set-up and programming without supply, easily replaceable from the front
- Protective separation between supply and contacts
- 35 mm wide
- 35 mm rail (EN 60715) mount
- Cadmium free contact material

For outline drawing see page 15, 16

Contact specification

Contact configuration		1 CO (SPDT)	2 CO (DPDT)		2 CO (DPDT)
Rated current/Maximum peak current		A	16/30 (120 A - 5 ms)		16/30 (120 A - 5 ms)
Rated voltage/ Maximum switching voltage		V AC	250/400		250/400
Rated load AC1		VA	4000		4000
Rated load AC15 (230 V AC)		VA	750		750
Nominal lamp rating:					
230 V incandescent/halogen W			2000		2000
fluorescent tubes with electronic ballast W			1000		1000
fluorescent tubes with electromagnetic ballast W			750		750
CFL W			400		400
230 V LED W			400		400
LV halogen or LED with electronic ballast W			400		400
LV halogen or LED with electromagnetic ballast W			800		800
Minimum switching load		mW (V/mA)	1000 (10/10)		1000 (10/10)
Standard contact material			AgSnO ₂		AgSnO ₂
Supply specification					
Nominal voltage (U _N)		V AC (50/60 Hz)	110...230		110...230
		V DC	110...230		110...230
Rated power AC/DC		VA (50 Hz)/W	2.8/0.9		2.8/0.9
Operating range		V AC (50 Hz)	88...253		88...253
		V DC	88...253		88...253
Technical data					
Electrical life at rated load in AC1		cycles	100 · 10 ³		100 · 10 ³
Type of time switch			Weekly		Yearly
Memory locations for switching times			50		100
Minimum internal setting		min	1		1
Accuracy		s/day	1		1
Communication protocol			NFC		Bluetooth 5, NFC
Ambient temperature range		°C	-20...+50 (see page 10, diagram L12)		-20...+50 (see page 10, diagram L12)
Protection category			IP 20		IP 20
Approvals (according to type)			    		    

Weekly Astro time switch

- Suitable for applications where a variable light level is required - programmable via smartphone with NFC communications
- Compatible with power supply/ballasts with 0-10V or PWM inputs

Type 12.A4

- 1 analog output: 0-10V or PWM

- Functions: "Astro" ON, "Astro" OFF, ON/OFF
- Location coordinates easily settable for most European countries through Post codes
- Offset function: allows programming of switching times offset from the astronomic time (by up to 90 min, in 1 min step)
- Minimum time interval setting - 1 minute
- 50 storable programs
- Summer/Winter European, Australian, Brazilian time
- LCD status indication, set-up and programming
- Lock with a 4-digit PIN
- Back-light display
- Internal battery for set-up and programming without supply, easily replaceable from the front
- Protective separation between supply and contacts
- 35 mm wide
- 35 mm rail (EN 60715) mount
- Cadmium free contact material

For outline drawing see page 16

Analogue output characteristics

Output signal

0-10 V, 10mA max

Output signal

PWM 30 V, 20 mA max

Contact output characteristics

Contact configuration

1 CO (SPST)

Rated current/Maximum peak current

A

16/30 (120 A - 5 ms)

Rated voltage/
Maximum switching voltage

V AC

250/400

Rated load AC1

VA

4000

Rated load AC15 (230 V AC)

VA

750

Minimum switching load

mW (V/mA)

1000 (10/10)

Standard contact material

AgSnO₂

Supply specification

Nominal voltage (U_N)

V AC (50/60 Hz)

110...230

V DC

110...230

Rated power AC/DC

VA (50 Hz)/W

2.8/0.9

Operating range

V AC (50 Hz)

90...264

V DC

90...264

Technical data

Type of time switch

Weekly

Memory locations for switching times

50

Minimum switching interval

min

1

Accuracy

s/day

1

Communication protocol

NFC

Ambient temperature range

°C

-20...+50

Protection category

IP 20


Approvals (according to type)



NEW 12.A4



- Weekly programming
- 1 analog output: 0-10V or PWM




Electronic digital time switches**- 1 Weekly time setting****Type 12.71**

- 1 CO 16 A
- 17.8 mm wide
- Minimum time interval setting - 1 minute
- Internal battery for set-up without supply
- Pulse output function:
1 s...59:59(mm:ss)
- Automatic adjustment for daylight saving
- 35 mm rail (EN 60715) mount

12.71

- Digital weekly time switch
- 1 CO 16 A
- 17.8 mm wide



For outline drawing see page 15

Contact specification

Contact configuration	1 CO (SPDT)		
Rated current/Maximum peak current	A	16/30	
Rated voltage/ Maximum switching voltage	V AC	250/—	
Rated load AC1	VA	4000	
Rated load AC15 (230 V AC)	VA	420	
Nominal lamp rating:			
230 V incandescent/halogen W		400	
fluorescent tubes with electronic ballast W		100	
fluorescent tubes with electromagnetic ballast W		100	
CFL W		50	
230 V LED W		50	
LV halogen or LED with electronic ballast W		50	
LV halogen or LED with electromagnetic ballast W		100	
Minimum switching load	mW (V/mA)	1000 (10/10)	
Standard contact material		AgNi	

Supply specification

Nominal voltage (U_N)	V AC (50/60 Hz)	—	230
	V AC/DC	24	—
Rated power AC/DC	VA (50 Hz)/W	1.4/1.4	2/—
Operating range	AC (50 Hz)	$(0.9...1.1)U_N$	$(0.85...1.1)U_N$
	DC	$(0.9...1.1)U_N$	—

Technical data

Electrical life at rated load in AC1	cycles	$50 \cdot 10^3$	
Type of time switch		weekly	
Memory locations for switching times*		30	
Minimum switching interval	min	1	
Accuracy	s/day	0.5	
Ambient temperature range	°C	-30...+55	
Protection category		IP 20	

Approvals (according to type)

* Switching times in memory may be used more than once i.e. when selected for different days.

Ordering information


Example: 12 series digital (analogue style) time switch, 1 CO 16 A contact, (110...230)V AC/DC supply

1 2 . 5	1 . 8 . 2 3 0 . 0 0 0 0
Series Type 0 = Daily, 35.8 mm wide 1 = Daily, 17.5 mm wide 3 = Daily or Weekly, 72 x 72 mm 5 = Digital (analogue style), NFC programming, 35 mm wide 6 = Weekly, NFC programming, 35 mm wide 7 = Weekly, 17.5 mm wide 8 = Astro-switch, NFC programming, 35 mm wide A = Weekly "Astro", NFC programming, 35 mm wide B = Yearly Astro, Bluetooth 5 and NFC, 35 mm wide No. of poles 1 = 1 CO (SPDT), 16 A 1 = 1 NO (SPST-NO), 16 A 2 = 2 CO (DPDT), 16 A 4 = Analog output: 0-10V or PWM	Option 0 = With power back-up 1 = Without power back-up (type 12.11) Supply voltage 024 = 24 V AC/DC (type 12.71) 024 = 12...24 V AC/DC (types 12.61, 12.A2) 120 = 120 V AC 230 = 230 V AC 230 = (110...230)V AC/DC (types 12.51, 12.61, 12.62, 12.81, 12.A1, 12.A2, 12.B2) Supply version 0 = AC (50/60 Hz)/DC (types 12.61.0.024, 12.A2.0.024, 12.71.0.024) 8 = AC (50/60 Hz) 8 = AC (50/60 Hz)/DC (types 12.51, 12.81, 12.61, 12.62, 12.A1, 12.A2, 12.A4, 12.B2) Option 0 = Standard 0 = Daily only for 12.31 7 = Weekly only for 12.31 Special version 0 = Standard 1 = Standard (12.A4) Codes 12.01.8.230.0000 12.11.8.230.0000 12.11.8.230.1000 12.31.8.230.0000 12.31.8.230.0007 12.51.8.230.0000 12.71.0.024.0000 12.71.8.230.0000 12.81.8.230.0000 12.61.0.024.0000 12.61.8.230.0000 12.62.8.230.0000 12.A1.8.230.0000 12.A2.0.024.0000 12.A2.8.230.0000 12.A4.8.230.0010 12.B2.8.230.0000


Technical data

Insulation			12.51, 12.61, 12.62, 12.81, 12.A1, 12.A2, 12.A4, 12.B2		12.01, 12.11, 12.31, 12.71		
Dielectric strength between supply and contacts			V AC	4000	4000		
Dielectric strength between open contacts			V AC	1000	1000		
Rated impulse voltage (between supply and contacts)			kV/(1.2/50)µs	6	6		
Rated impulse voltage (between open contacts)			kV/(1.2/50)µs	1.5	1.5		
EMC specifications							
Type of test		Reference standard					
Electrostatic discharge	contact discharge	EN 61000-4-2	4 kV	6 kV			
	air discharge	EN 61000-4-2	8 kV	8 kV			
Radiated electromagnetic field (80...1000 MHz)		EN 61000-4-3	10 V/m	10 V/m			
Fast transients (burst 5/50 ns, 5 and 100 kHz)		EN 61000-4-4	4 kV	4 kV			
Voltage pulses on supply terminals (surge 1.2/50 µs)	common mode	EN 61000-4-5	4 kV	2 kV			
	differential mode	EN 61000-4-5	4 kV	2 kV			
Radiofrequency common mode voltage (0.15...80 MHz)		EN 61000-4-6	10 V	10 V			
Voltage dips	70% U _N , 40% U _N	EN 61000-4-11	10 cycles	10 cycles			
Short interruptions		EN 61000-4-11	10 cycles	10 cycles			
Radio frequency conducted emissions	0.15...30 MHz	EN 55014	class B	class B			
Radiated emissions	30...1000 MHz	EN 55014	class B	class B			
Terminals							
 Screw torque		Nm	0.8	1.2			
Max. wire size			mm ²	AWG	mm ²	AWG	
		solid cable	1 x 6 / 2 x 4	1 x 10 / 2 x 12	1 x 6 / 2 x 4	1 x 10 / 2 x 12	
		stranded cable	1 x 4 / 2 x 2.5	1 x 12 / 2 x 14	1 x 6 / 2 x 2.5	1 x 10 / 2 x 14	
Wire strip length		mm	9				
Other data							
Power back-up (Battery life)			6 years (12.51, 12.61, 12.62, 12.81, 12.A1, 12.A2, 12.A4, 12.71, 12.B2)				
Battery type			CR 2032, 3 V, 230 mAh (12.51, 12.61, 12.62, 12.81, 12.A1, 12.A2, 12.A4, 12.B2)				
Power back-up			100 h (12.01, 12.11, 12.31 - following 80 h continuous energisation)				
Power lost to the environment			12.51, 12.61, 12.81, 12.A1	12.62, 12.A2, 12.A4, 12.B2	12.01, 12.11, 12.31	12.71	
			in stand-by W	0.2	0.2	—	—
			without contact current W	0.9	0.9	1.5	2
			with rated current W	1.5	2.1	2.5	3 (for 1 pole)

L 12 - Rated current v ambient temperature

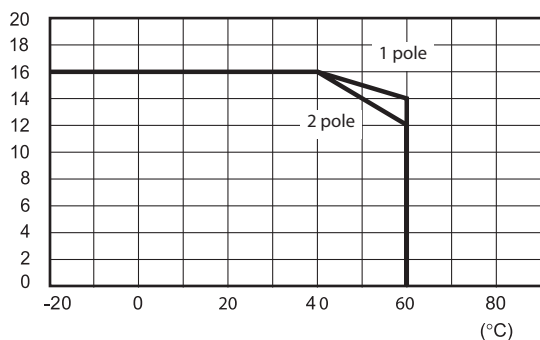


Wiring diagrams

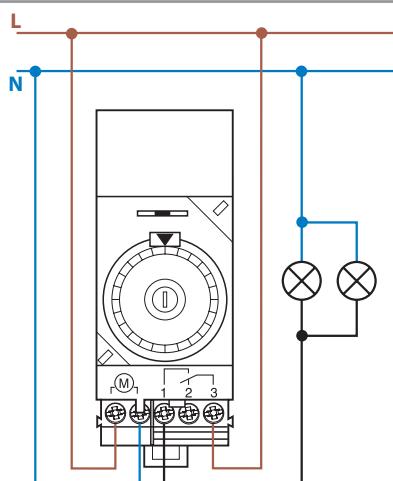

Type 12.01

Selector switch:


- ⏻ = Permanently OFF
- AUTO = Automatic
- I = Permanently ON

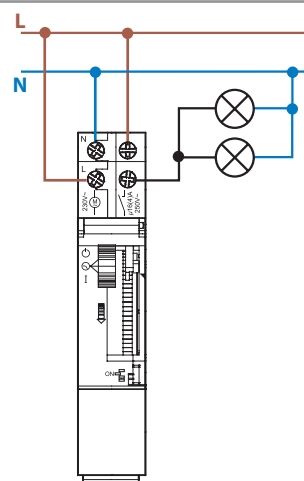


Type 12.11

Selector switch:


- ⏻ = Permanently OFF
- ⊖ = Automatic
- I = Permanently ON

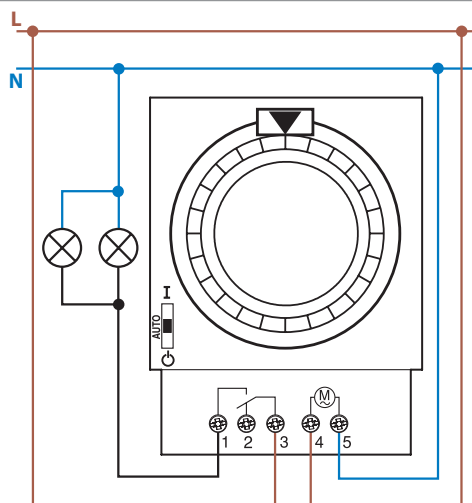

Type 12.31

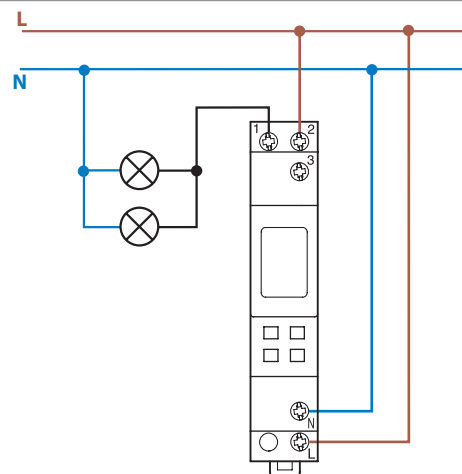


Type 12.71

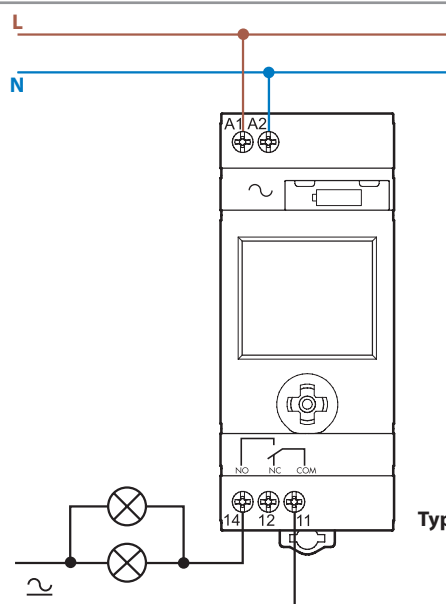


**Types 12.51
12.81**

Wiring diagrams

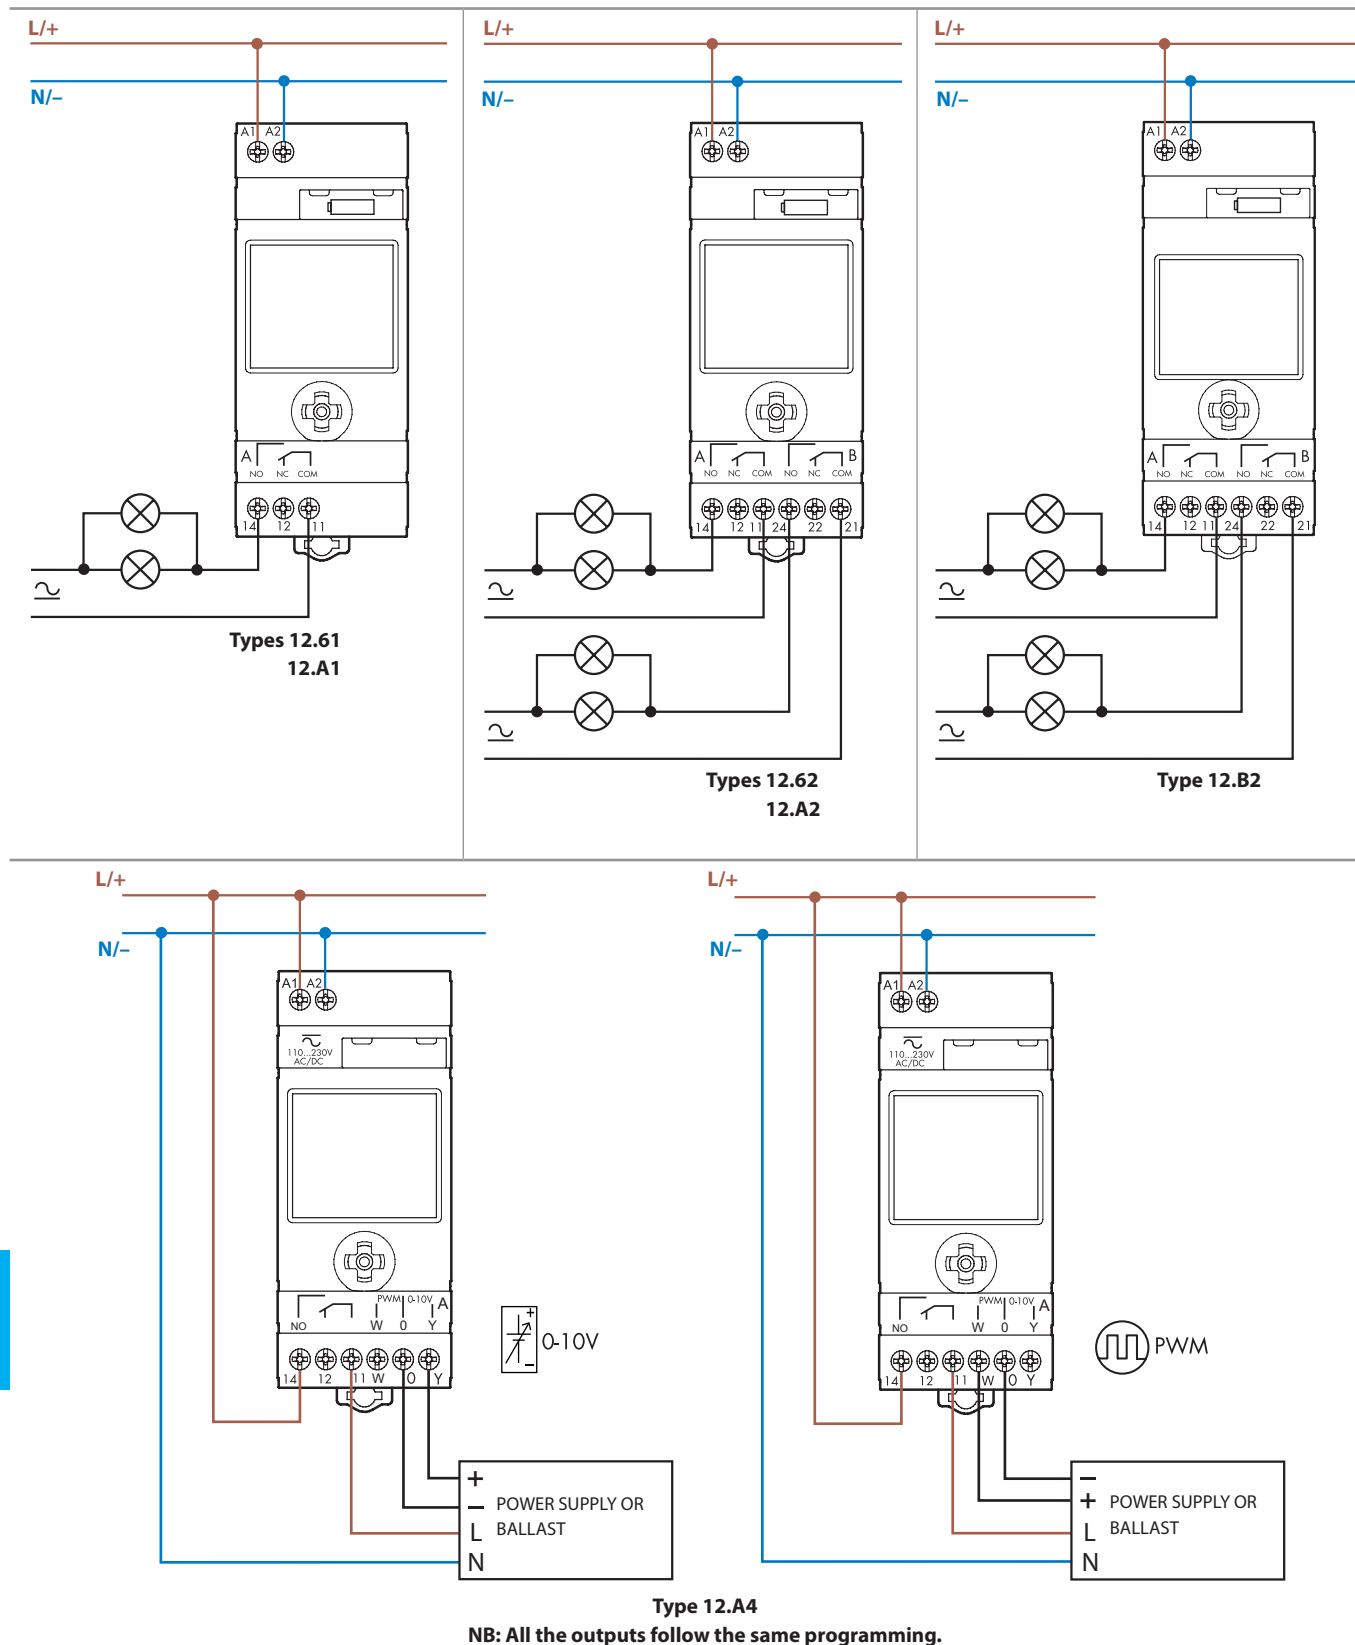


Wiring diagrams

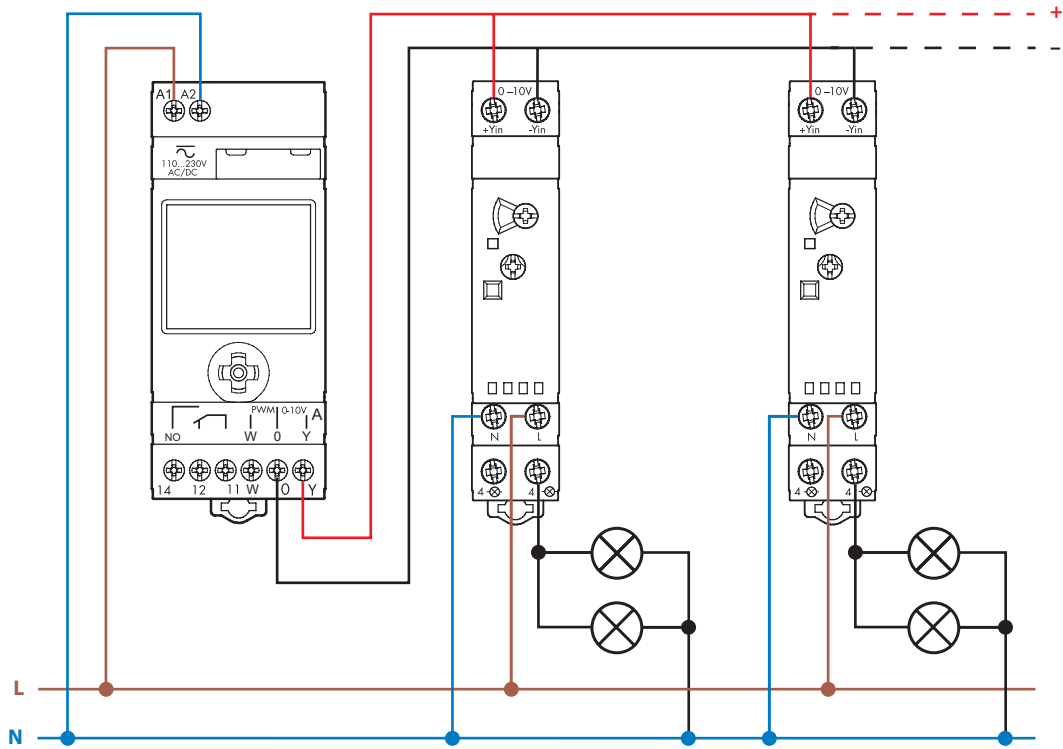

Type 12.A4 with 15.11
Application example with slave dimmer Type 15.11

Expandability

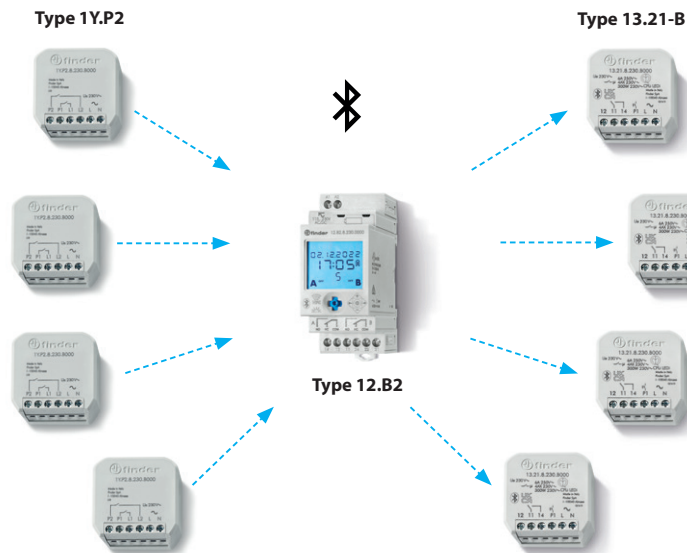

Using the maximum number of expansions, you can make up to 6 outputs and 8 inputs out of it



In this application you can use a range extender (Type 1Y.E8) to reach the most distant devices.

Different programming modes for type 12.51, 12.61, 12.62, 12.81, 12.A1, 12.A2, 12.A4, 12.B2



"Smart"

Mode via smartphones with NFC communication using Finder toolbox Android App.




"Classic"

Mode via the joystick

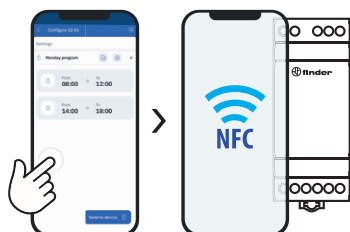

Bluetooth programming (Type 12.B2 only)

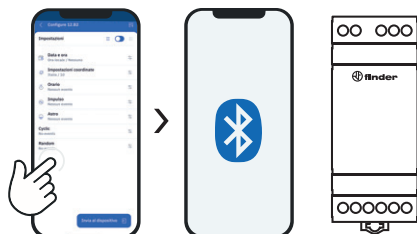

Finder Toolbox for programming


Once the App FINDER Toolbox is downloaded and installed, you can read an existing program, or program your device with maximum flexibility, changing the smallest details and saving your program directly to your smartphone.

At this point you simply touch the time switch with the smartphone to transfer the data.

Finder Toolbox for reference

Finder Toolbox provides all technical data sheets and news from Finder Toolbox.

J Functions type 12.81

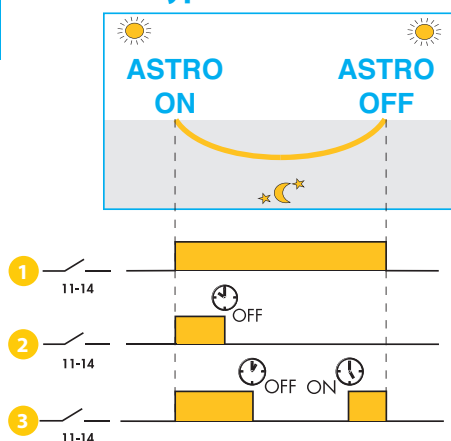


The Override feature permits the 12.81 three different ways of functioning:

- 1 Classic function where the **AstroON** and **AstroOFF** times are determined by the geographic coordinates. These times vary every day.
- 2 Functions such that the output turns on according to the **AstroON** time and turns off according to the clock off-time OFF . Application example: shop window lighting on by **AstroON** at sunset and off OFF at 00:30.
- 3 Functions such that the output turns on according to the **AstroON** time and turns off according to the clock off-time OFF , and then turns back on at the clock on-time ON (for the remainder of the ASTRO time period). Application example: company car park lighting, on by **AstroON** at sunset, off end of the evening shift at 23:00 OFF . On again at the beginning of the morning shift at 05:00 ON and off automatically by **AstroOFF**.*


* Depending on the time of year (summer specifically) it may be that the override ON time will fall after the AstroOFF time. In this case, the output switches off at the AstroOFF time and the override ON time is ignored.

Outline drawings


Type 12.01
Screw terminal

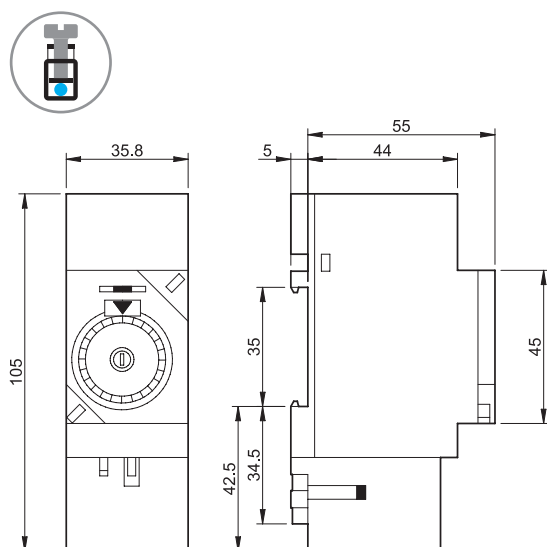


Type 12.11
Screw terminal

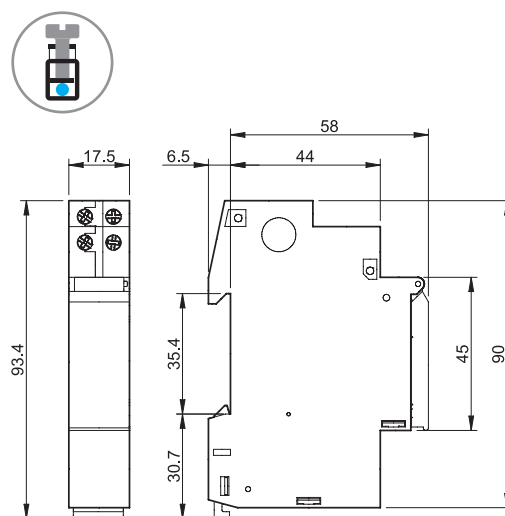


Type 12.31
Screw terminal

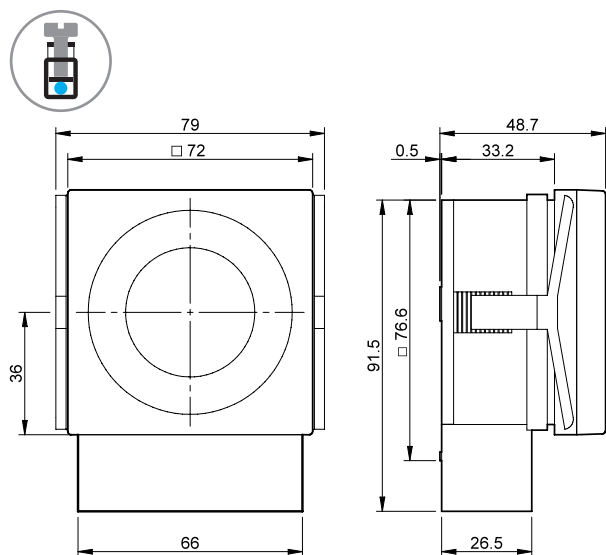


Types 12.51/12.81
Screw terminal

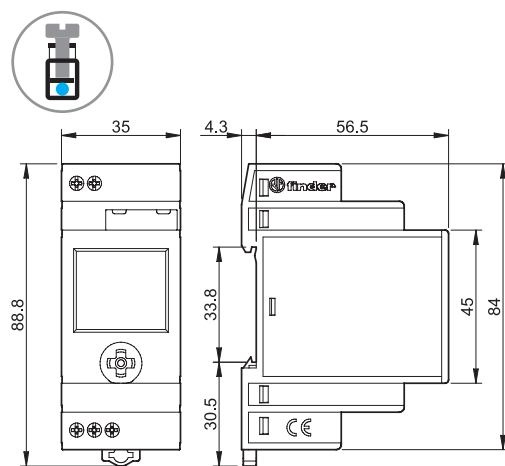

Type 12.71
Screw terminal

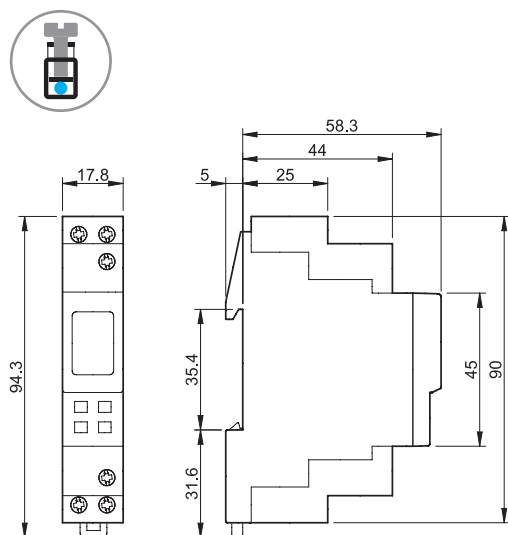


Types 12.61 / 12.A1
Screw terminal

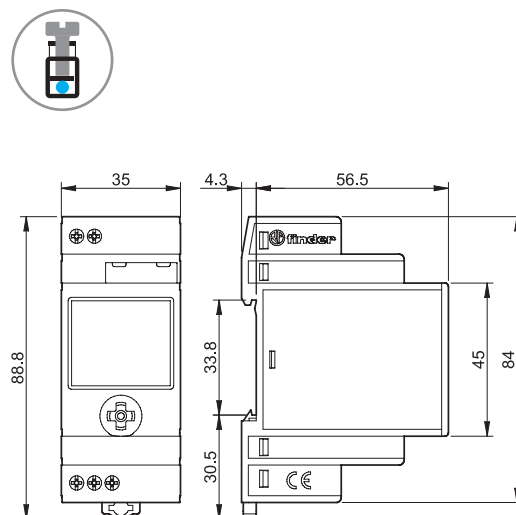


Outline drawings


Types 12.62 / 12.A2 / 12.A4
Screw terminal

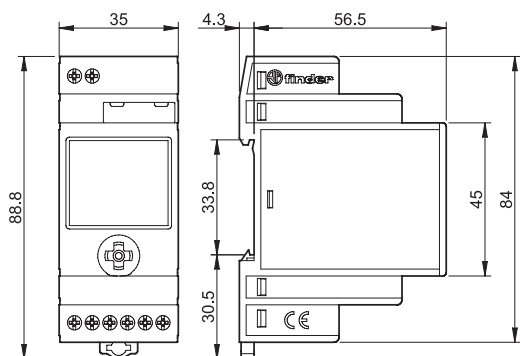

Type 12.B2
Screw terminal

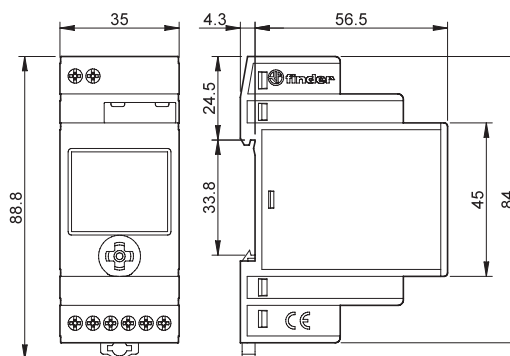

Battery replacement type 12.51, 12.61, 12.62, 12.81, 12.A1, 12.A2, 12.A4, 12.B2

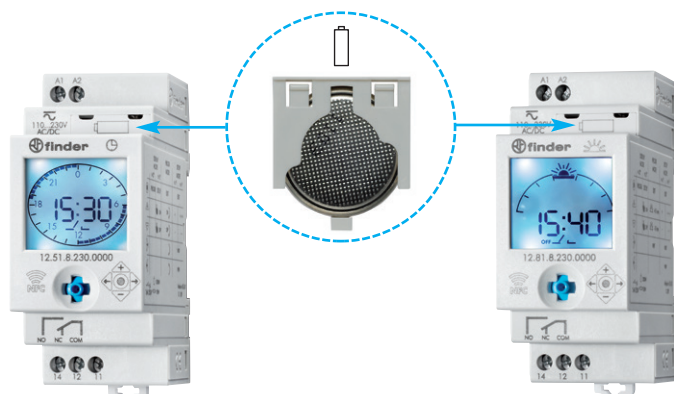


Power-save mode

If the 230 V AC supply is not connected, the time switch enters power-save mode: only the clock is maintained active whilst the display turns off so as to guarantee a long life for the built-in back-up battery. With a press to the joystick it is possible to "awake" the device and enter Display mode (with the "plug" symbol displayed). A further press to  will enter the program or set-up mode as explained in the Display mode section above.

After about 1 minute of inactivity the power-save mode will start again. During program or set-up the current absorption is higher than in power-save mode, thus influencing the battery life.

In this mode the display back-light is not active. It is activated following a press to the joystick only with the 230 V AC supply connected, but after about 1 minute of inactivity the display back-light will turn off, and to activate it again it is necessary to press the joystick again.

Note: the output relay only functions if the power supply is connected.




Accessories type 12.51, 12.61, 12.62, 12.81, 12.A1, 12.A2, 12.A4, 12.B2



011.01

Adaptor for panel mounting, 35 mm wide




011.01



012.BG.8.230

GPS external antenna, this device synchronizes the 12.B2s time and date via Bluetooth

012.BG.8.230

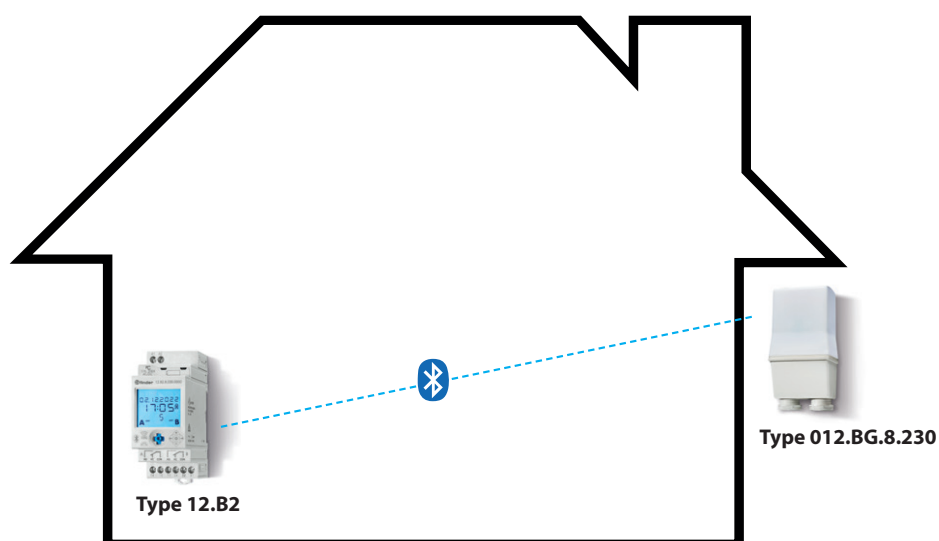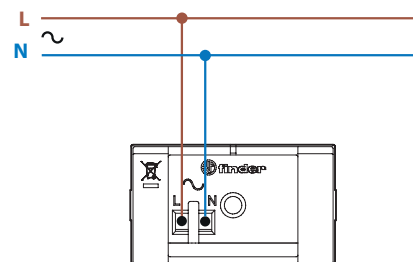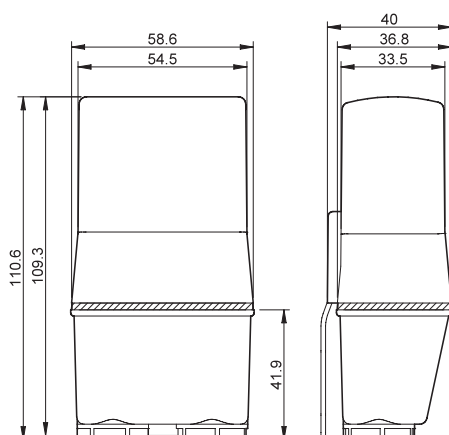

- The 12.B2 is designed to be installed in a cabinet, while the external antenna takes care of the constant time synchronization.
- There is no limit of 12.B2 for a single antenna, the only important parameter is the range of action of the Bluetooth.
- Install the antenna outside, close to a window or the external wall.

