ENDA ETS Series Rail and Panel Mounted Heatsinks

Thank you for choosing **ENDA** products.

ETS series rail and panel mounted heat sinks are designed for EPxA1 and EPxA3 series Panel Mounted Solid State Relays.

CE

RoHS Compliant

ORDER CODE

ETS - 62 - 100 F


Product Basic Code	
Heatsink	ETS


Width	
46mm	46
62mm	62
99mm	99

Fan	
Fan	F


Depth	
62mm	62
80mm	80
100mm	100

ENDA ETS-46-100 RAIL MOUNTED HEATSINK

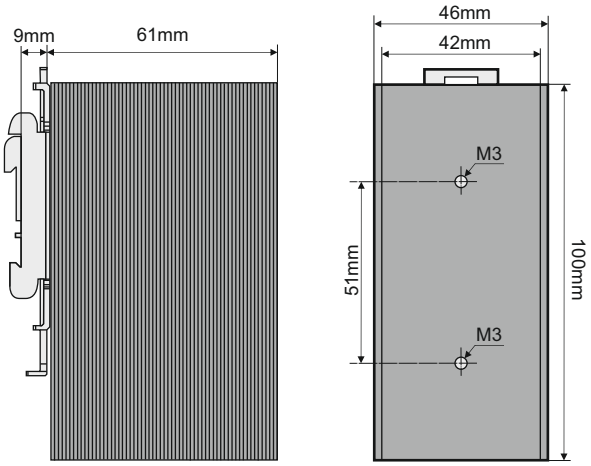





ENDA ETS-46-80

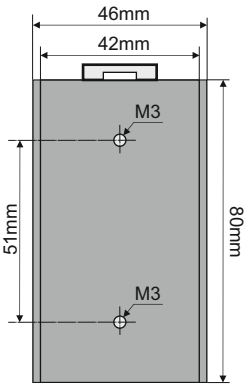

ENDA ETS-46-62



INSTALLATION





To mount the device on the rail :
By using a screwdriver, pull the lockplate in direction **1** to lock it. Assemble the device on the rail and push it in the direction **2** (sideways).

To remove the device from the rail :
By using a screwdriver, pull the lockplate in direction **1** to lock it. Remove device from rail.

Heatsink	SSR Current (A)	Dimensions WxHxD (mm)	Thermal Resistance (°C/W)
ETS-46-62 ETS-46-80 ETS-46-100	12-25 20-25 25-40	46x61x62 46x61x80 46x61x100	2,0 1,7 1,5
ETS-62-100	40-50	62x77x100	1,0
ETS-99-100	3x25	99x87x100	0,75
ETS-46-100F	50-70	46x61x110	0,7
ETS-62-100F	70-120	62x77x120	0,4
ETS-99-100F	3x40 - 3x50	99x87x125	0,34


ENDA ETS-46-100F RAIL MOUNTED HEATSINK

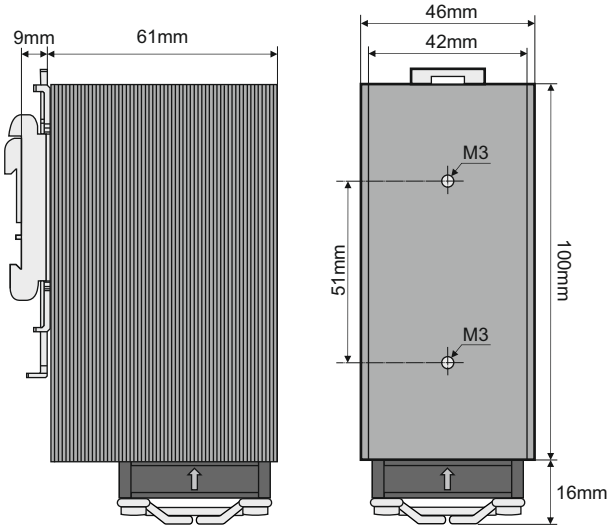





SURAN Industrieelektronik
An der Hanfrötze 6 / D-77731 Willstätt
Tel.: +49 (0)7852 / 4889 962
E-mail : info@suran-elektronik.de
Internet : www.suran-elektronik.de

ENDA ETS-62-100F RAIL AND PANEL MOUNTED HEATSINK

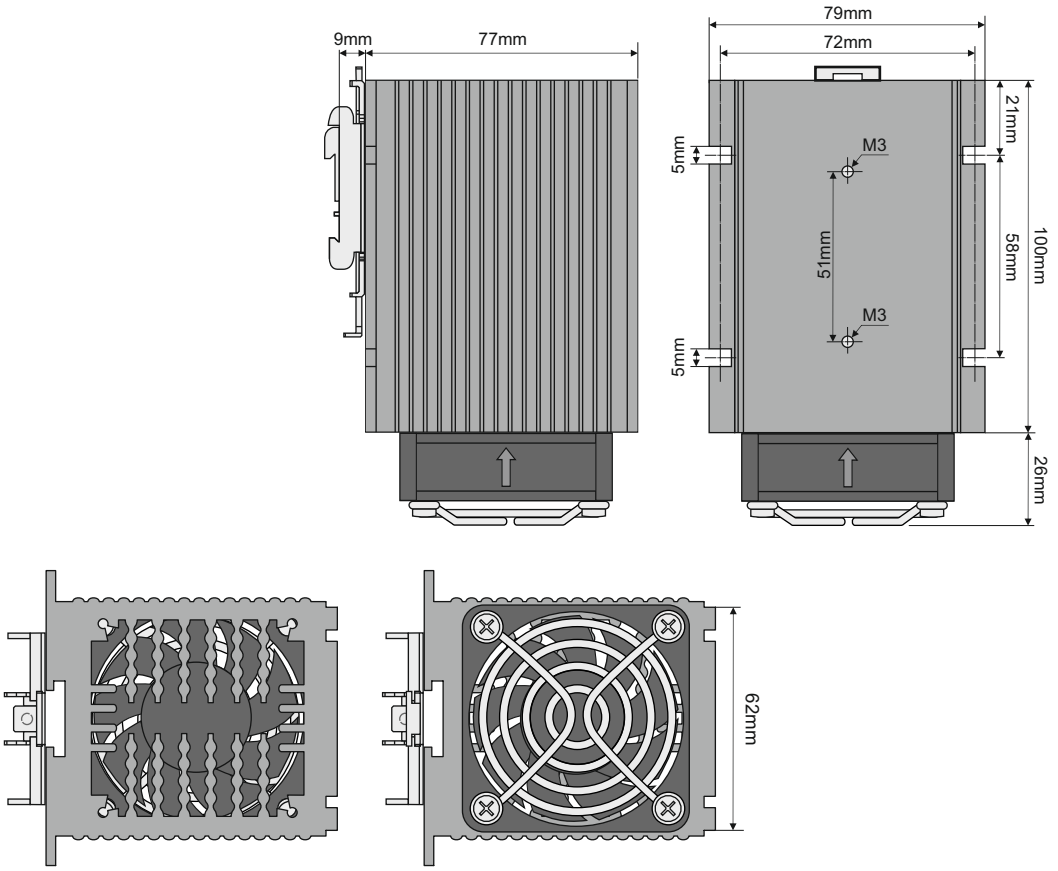


ENDA ETS-99-100F RAIL AND PANEL MOUNTED HEATSINK

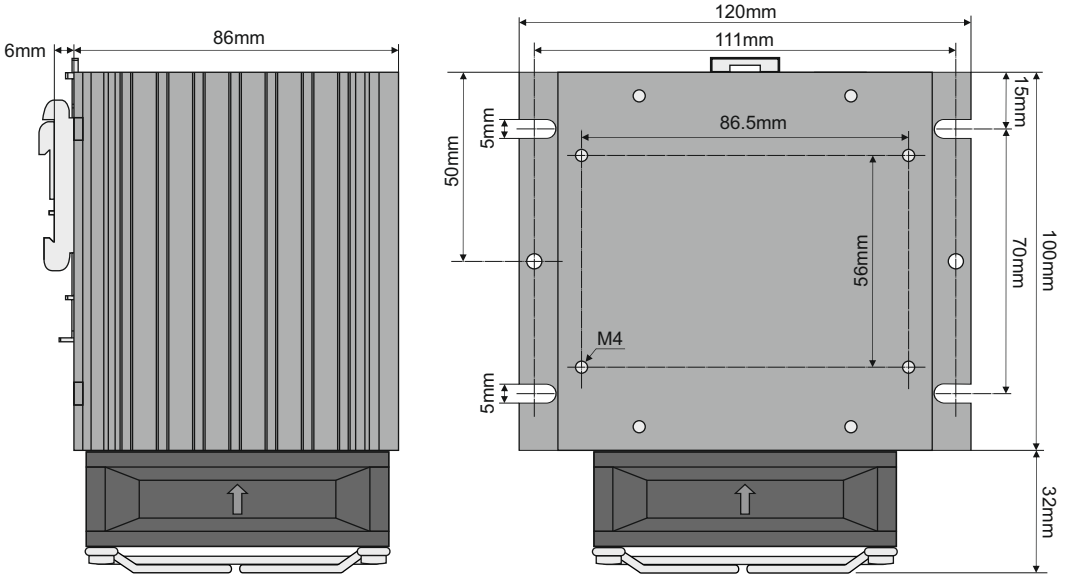

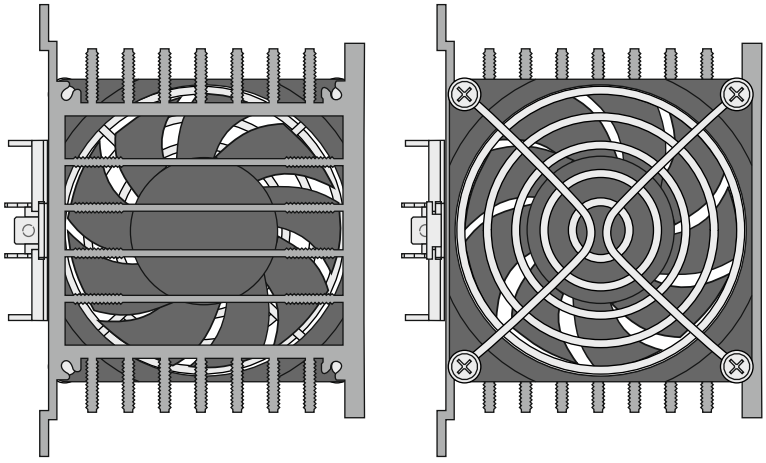

INSTALLATION




To mount the device on the rail :
By using a screwdriver, pull the lockplate in direction **1** to lock it.
Assemble the device on the rail and push it in the direction **2** (sideways).


To remove the device from the rail :
By using a screwdriver, pull the lockplate in direction **1** to lock it.
Remove device from rail.

Heat / Current Curves with ETS Series Heatsinks for ENDA Panel Mounted SSR's


EPxA1-212Z

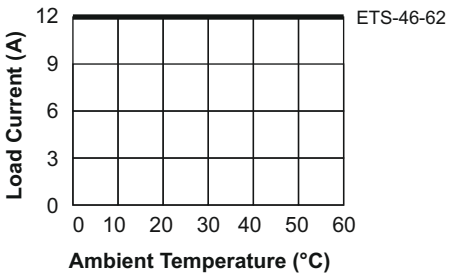


EPxA1-225Z

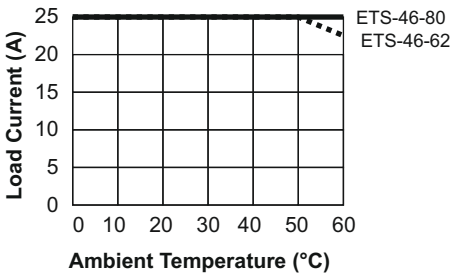


EPxA1-240Z

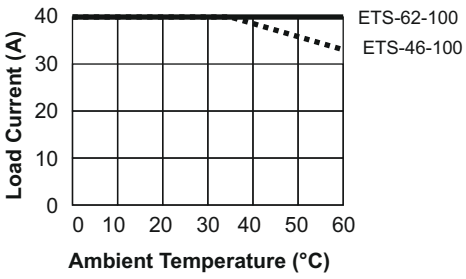


EPxA1-425Z

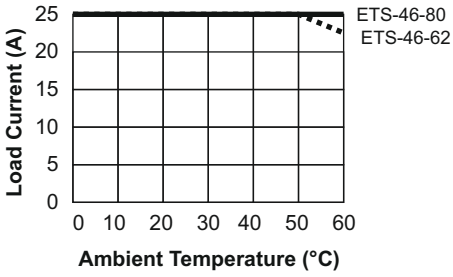


EPxA1-440Z

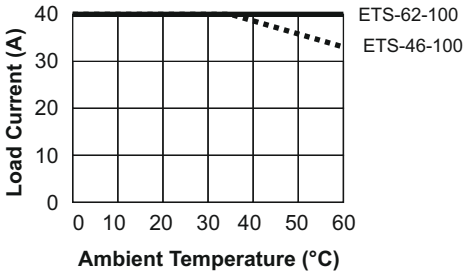


EPxA1-450Z

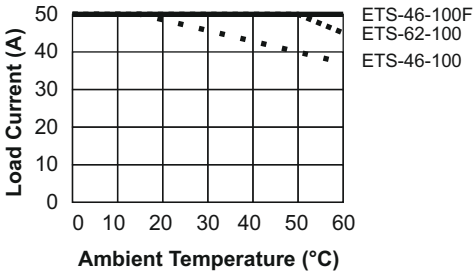


EPxA1-470Z

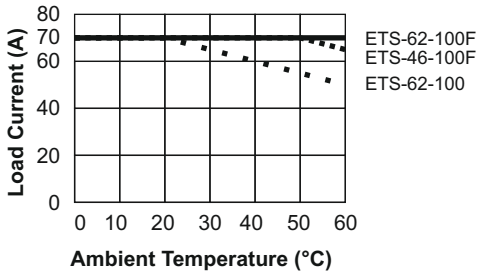


EPxA1-4100Z

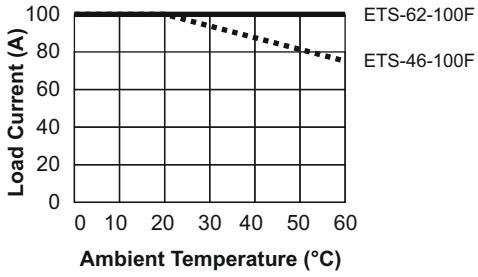


EPxA1-4120Z

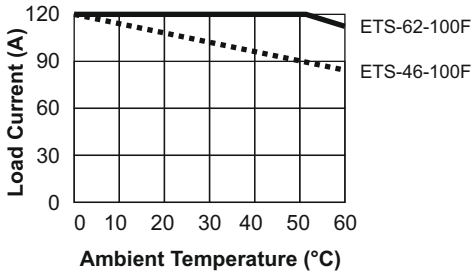


EPxA3-425Z

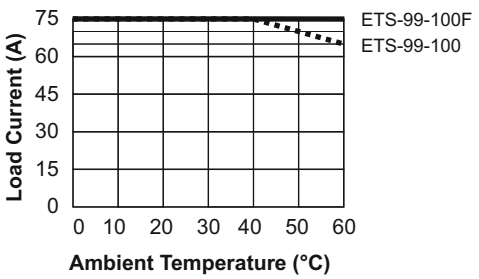

EPxA3-440Z

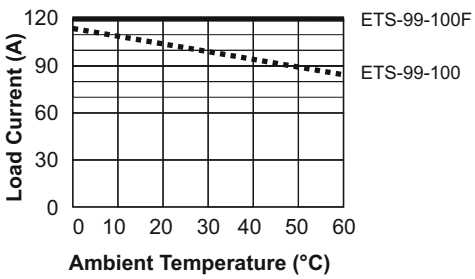

EPxA3-450Z

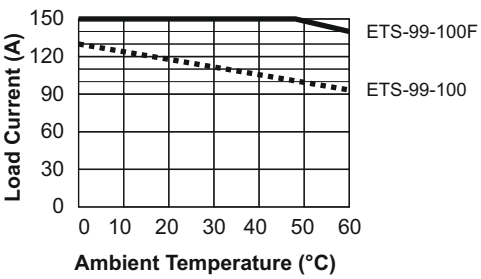

SURAN Industrieelektronik
An der Hanfrötze 6 / D-77731 Willstätt
Tel.: +49 (0)7852 / 4889 962
E-mail : info@suran-elektronik.de
Internet : www.suran-elektronik.de