

6V & 12V | 10A

GENIUS10



CHARGE DEAD BATTERIES. BATTERY CHARGER AND MAINTAINER.

6V &
12V

DO MORE WITH GENIUS.

Designed for 6-volt and 12-volt lead-acid automotive, marine, and deep-cycle batteries, including flooded, gel, AGM, and maintenance-free, plus lithium-ion batteries.

ZERO
VOLTS

CHARGE DOWN TO ZERO VOLTS.

Charge dead batteries as low as 1-volt. Or use the all-new Force Mode that allows you to take control and manually begin charging dead batteries down to zero volts.

115%

MORE POWER.

Similar to our G7200, just better. It's 34% smaller and delivers 65% more power. And it's simpler and easier to use than ever before.

24/7

WORRY-FREE CHARGING.

Provides all-season, all-weather charging for a healthy battery, leave plugged in 24/7 with no worries of overcharging. Automatically returns to its last selected mode.

NOCO


30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN

NOCO genius 10™



CHARGING MODES

LEAD-ACID

Used for 6V & 12V wet cell, gel, enhanced flooded, maintenance-free, & calcium batteries.

6V

12V

AGM

Used for 6V & 12V AGM or maintenance-free batteries.

6V
AGM

12V
AGM

LITHIUM

Used for 12V lithium-ion batteries (including lithium iron phosphate). Only for batteries with Battery Management Systems (BMS).

12V
LITHIUM

REPAIR

Used to repair old, idle, damaged, stratified, or sulfated batteries.

12V
REPAIR

SUPPLY

Converts to a DC power supply with an output of 13.6V, used for powering any 12V DC device, or as a memory retainer when replacing a battery.

12V
SUPPLY

ADVANCED DIAGNOSTICS

HIGH VOLTAGE

The battery voltage is too high for the selected charge mode. Check the battery and charge mode.



BAD BATTERY

There is a possible battery short or the battery will not hold a charge. Consult a professional.



REVERSE POLARITY

Charger is connected to the battery in reverse. Reverse the connections.



STANDBY

The charger is in standby or the battery voltage is too low for the charger to detect.



CHARGE LED

Indicates the charge level of the internal battery.



THERMAL COMPENSATION.

The new integrated thermal sensor automatically monitors and adjusts the charging cycle based on fluctuations of ambient temperature, limiting the chance of under-charging or over-charging, providing a more accurate and fully charged battery.

Battery Size CHARGING TIMES



20Ah	1.5hr	*Approximate charging times at 50% depth of discharge.
40Ah	3hr	
80Ah	6hr	
100Ah	7.5hr	

TECHNICAL SPECIFICATIONS

LINE VOLTAGE AC:	100-240 VAC, 50-60Hz
OUTPUT POWER:	150 Watts Max
CHARGING VOLTAGE:	Various
CHARGING CURRENT:	10A (12V), 10A (6V)
CHEMISTRY:	Lead-Acid and Lithium
OPERATING TEMPERATURE:	-4° to 104° F (-20° to +40° C)
STORAGE TEMPERATURE:	-22° to 140° F (-30° to +60° C)
LOW-VOLTAGE DETECTION:	1V (12V), 1V (6V)
BACK CURRENT DRAIN:	<0.5mA
BATTERY CAPACITY:	Up to 230Ah, Maintains All Battery Sizes
HOUSING PROTECTION:	IP65
COOLING:	Natural Convection
UNIT WEIGHT:	3.33 lbs (1.51 kg)

VOLUMETRICS:	Retail Packaging: Dimensions: 4.41" x 4.48" x 9.10" Weight: 3.99lbs UPC: 0-46221-19005-2	Master Carton: Dimensions: 19.02" x 9.84" x 5.71" Weight: 17.42lbs Quantity: 4 UCC: 10046221190059
	Inner Carton: Dimensions: 4.60" x 4.76" x 9.21" Weight: 4.17lbs	Units Per Pallet: NA - 280 Units International - 224 Units

WHAT'S IN THE BOX

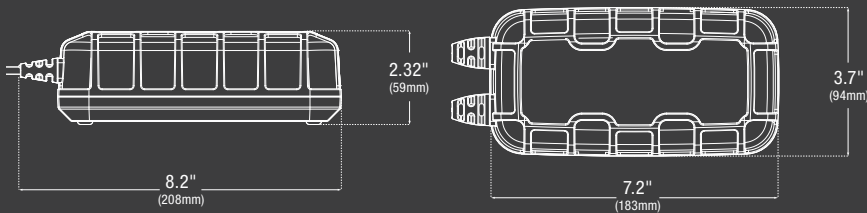

GENIUS10 Battery Charger + Maintainer


Mounting Bracket and Strap



Userguide and warranty



(2) #8x1" Self-tapping screws



Battery Clamps + Integrated Eyelets

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

