



Meaningful Innovation.

WEEE Number: 80133970

INSTRUCTION MANUAL

LED POWER SUPPLY



02 YEAR
WARRANTY*


TECHNICAL DATA

Model	SKU	Watts	Output Voltage	Output Current	Dimension [mm]	Dimmable
VT-13036-S	24254	36	DC:12V	3A	116x35x24	NO
VT-24035-S	24235	36	DC:24V	1.5A	116x35x24	NO
VT-13060-S	24255	60	DC:12V	5A	145x50x24	NO
VT-24062-S	24236	60	DC:24V	2.5A	145x50x24	NO
VT-13075-S	24256	75	DC:12V	6.25A	200x50x24	NO
VT-24075-S	24237	75	DC:24V	3.1A	200x50x24	NO
VT-13120-S	24257	120	DC:12V	10A	200x50x24	NO
VT-24122-S	24238	120	DC:24V	5A	200x50x24	NO
VT-13150-S	24258	150	DC:12V	12.5A	209x63x25	NO
VT-24152-S	24239	150	DC:24V	6.25A	209x63x25	NO
VT-13200-S	24259	200	DC:12V	16.5A	209x63x25	NO
VT-24202-S	24240	200	DC:24V	8.25A	209x63x25	NO
VT-13250-S	24260	250	DC:12V	20.83A	246x63x30	NO
VT-24250-S	24241	250	DC:24V	10.5A	246x63x30	NO
VT-13360-S	24261	360	DC:12V	30A	208x82x32	NO
VT-24361-S	24242	360	DC:24V	15A	208x82x32	NO

- ON/OFF CYCLE >15,000 Times
- BODY TYPE Metal
- LIFE SPAN 20,000 Hours
- IP RATING IP20

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.



MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code
to access the manual in
multiple languages.



FR
Cet appareil,
ses accessoires
et cordons
se recyclent




Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !

IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU
FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS.
V-TAC EUROPE LTD. BULGARIA, PLOVDIV 4000, BUL.L.KARAVELOW 9B



This marking indicates that this product should not be disposed of with other household wastes.





Caution, risk of electric shock.

WARNING

1. Please make sure to turn off the power before starting the installation.
2. Installation should be done by a qualified electrician.
3. Observe the connection diagram provided before connecting to the power supply
4. Disconnect the power supply when wiring or soldering the LED.
5. Please ensure to check the DC output of the power supply matches with the DC Input of the striplight.
6. For indoor use only.

INSTALLATION DIAGRAM

AC POWER

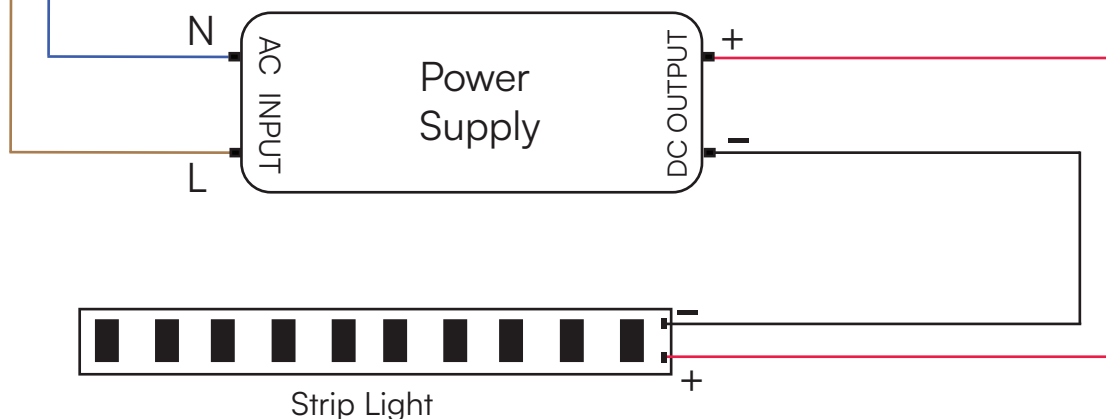

CONNECTION DIAGRAM

INSTALLATION INSTRUCTIONS

1. Ensure the power supply is turned off before beginning the installation.
2. Connect the AC input source to the power supply unit.
3. Attach an appropriate AC plug to the input (AC plug not included).
4. Connect the DC output terminals of the power supply unit to the LED strip light.
5. If the LED strip includes a DC connector:
 - a. Wire the DC output of the power supply to a compatible DC plug (not included).
 - b. Connect the DC plug to the DC connector of the LED strip light.
6. Plug the power adapter into a wall socket to activate the system.



VTAC EUROPE LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU
FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS.
V-TAC EUROPE LTD. BULGARIA, PLOVDIV 4000, BUL.L.KARAVELOW 9B

V-TAC UK LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT PLEASE REACH OUT TO US AT
SUPPORT@VTACEXPORTS.COM V-TAC, 5A TUNGSTEN PARK, DOWNS ROAD, WITNEY, OXFORDSHIRE, OX29 0AX