



Meaningful Innovation.

WEEE Number: 80133970

INSTRUCTION MANUAL LED POWER SUPPLY



02 YEAR
WARRANTY*

IP67
RATING


TECHNICAL DATA

Model	SKU	Watts	Output Voltage	Output Current	Dimension [mm]	Dimmable
VT-13036	24262	36	DC:12V	3A	140x35x21	NO
VT-24035	24243	36	DC:24V	1.5A	140x35x21	NO
VT-13060	24263	60	DC:12V	5A	159x50x25	NO
VT-24062	24244	60	DC:24V	2.5A	159x50x25	NO
VT-13100	24264	100	DC:12V	8.3A	219x50x25	NO
VT-24102	24245	100	DC:24V	4.15A	219x50x25	NO
VT-13150	24265	150	DC:12V	12.5A	224x65x25	NO
VT-24152	24246	150	DC:24V	6.25A	224x65x25	NO
VT-13200	24266	200	DC:12V	16.5A	244x65x25	NO
VT-24202	24247	200	DC:24V	8.25A	244x65x25	NO
VT-13300	24267	300	DC:12V	25A	244x80x29	NO
VT-24302	24248	300	DC:24V	12.5A	244x80x29	NO

- ON/OFF CYCLE >15,000 Times
- BODY TYPE Metal
- LIFE SPAN 20,000 Hours
- IP RATING IP67

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.



MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code
to access the manual in
multiple languages.



FR

Cet appareil,
ses accessoires
et cordons
se recyclent

À DÉPOSER
EN MAGASIN



À DÉPOSER
EN DÉCHÈTERIE




Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !

IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU
FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS.
V-TAC EUROPE LTD. BULGARIA, PLOVDIV 4000, BUL.L.KARAVELOW 9B



This marking indicates that this product should not be disposed of with other household wastes.





Caution, risk of electric shock.

WARNING


1. Please make sure to turn off the power before starting the installation.
2. Installation should be done by a qualified electrician.
3. Observe the connection diagram provided before connecting to the power supply
4. Disconnect the power supply when wiring or soldering the LED.
5. Please ensure to check the DC output of the power supply matches with the DC Input of the striplight.

INSTALLATION DIAGRAM

AC POWER

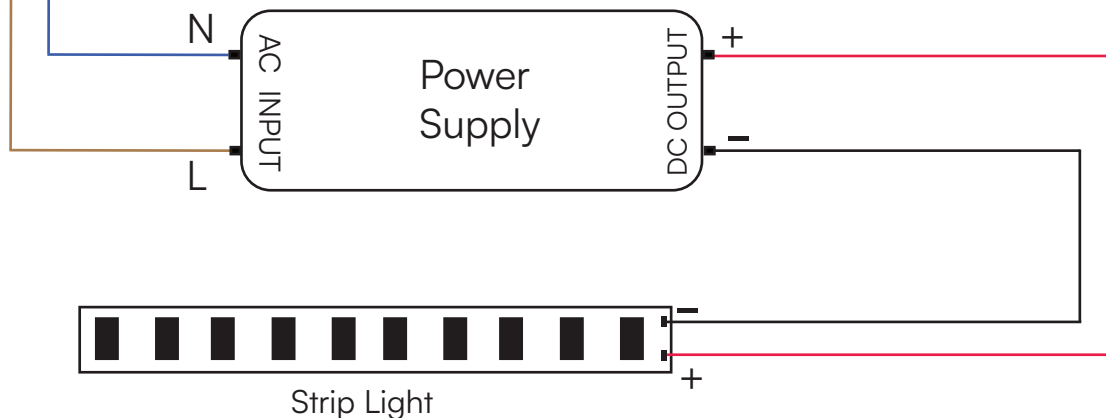

CONNECTION DIAGRAM

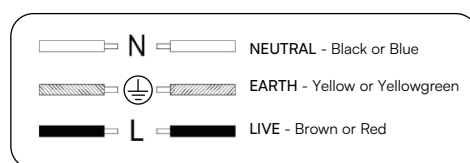

INSTALLATION INSTRUCTIONS

1. Ensure the power supply is turned off before beginning the installation.
2. Connect the AC input source to the power supply unit.
3. Attach an appropriate AC plug to the input (AC plug not included).
4. Connect the DC output terminals of the power supply unit to the LED strip light.
5. If the LED strip includes a DC connector:
 - a. Wire the DC output of the power supply to a compatible DC plug (not included).
 - b. Connect the DC plug to the DC connector of the LED strip light.
6. Plug the power adapter into a wall socket to activate the system.

RoHS



VTAC EUROPE LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU
FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS.
V-TAC EUROPE LTD. BULGARIA, PLOVDIV 4000, BUL.L.KARAVELOW 9B

V-TAC UK LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT PLEASE REACH OUT TO US AT
SUPPORT@VTACEXPORTS.COM V-TAC, 5A TUNGSTEN PARK, DOWNS ROAD, WITNEY, OXFORDSHIRE, OX29 0AX