
MK17 Series Reed Sensors

- **Features: Supplied in Tape & Reel, J-Lead, Excellent for Low Power Operations**
- **Applications: On/Off Control Switch, Position Detection, Switching Element & Others**
- **Markets: Appliance, Telecommunication, Security, Medical & Others**

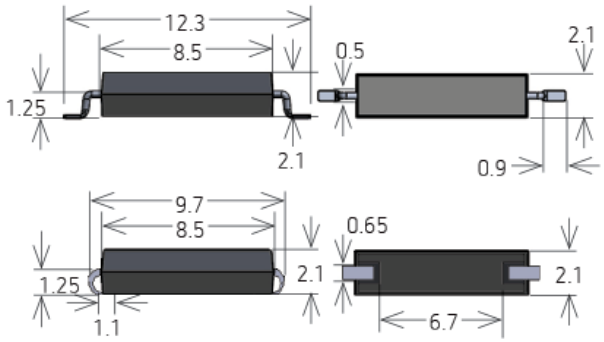

Part Description: MK17-X-0

Magnetic Sensitivity	Lead Design
B, C, D, E	1, 2, 3

Customer Options	Switch Model	Unit
Contact Data	80	
Rated Power (max.) Any DC combination of V&A not to exceed their individual max.'s	10	W
Switching Voltage (max.) DC or peak AC	170	V
Switching Current (max.) DC or peak AC	0.5	A
Carry Current (max.) DC or peak AC	0.5	A
Contact Resistance (max.) @ 0.5V & 50mA	200	mOhm
Breakdown Voltage (min.) According to EN60255-5	0.21	kVDC
Operating Time (max.) Incl. Bounce; Measured with w/ Nominal Voltage	0.6	ms
Release Time (max.) Measured with no Coil Excitation	0.05	ms
Insulation Resistance (typ.) Rh<45%, 100V Test Voltage	10^9	Ohm
Capacitance (typ.) @ 10kHz across open Switch	0.4	pF

USA: +1 866.782.6339 | salesusa@standexmeder.com EMEA: +49 7731/8399-0 | info@standexmeder.com APAC: +86 21/37606000 | salesasia@standexmeder.com

MK17 Series Reed Sensors


Housing and Lead Specifications

Housing Material	Mineral Filled Epoxy
Case Color	Black
Lead Design 1	Flat, straight leads for PCB slot mounting
Lead Design 2	Flat, bent SMD leads
Lead Design 3	J-Lead

Environmental Data		Unit
Shock Resistance (max.) 1/2 sine wave duration 11ms	30	g
Vibration Resistance (max.)	20	g
Operating Temperature	-40 to 130	°C
Storage Temperature	-50 to 130	°C
Soldering Temperature (max.) 5 sec. max.	260	°C

Glossary Contact Form

Form A	NO = Normally Open Contacts SPST = Single Pole Single Throw
Form B	NC = Normally Closed Contacts SPST = Single Pole Single Throw
Form C	Changeover SPDT = Single Pole Double Throw



Layout

Top View



Glossary Magnetic Sensitivity

Sens.	A	B	C	D	E	F	G
AT	05-10	10-15	15-20	20-25	25-30	30-35	35-40

MK17 Reed Sensor




Handling & Assembly Instructions

- Use proper lead clamping or heat sinking techniques to prevent mechanical and/or heat stress during, soldering, and welding
- Mechanical shock as the result of dropping the reed sensor typically from a distance of greater than 12" may change it's magnetic sensitivity and/or destroy the sensor
- Reflow Soldering Conditions according to JEDEC norm J-STD-020D.1

Life Test Data

*Load increase reduces life expectancy of Reed Switches

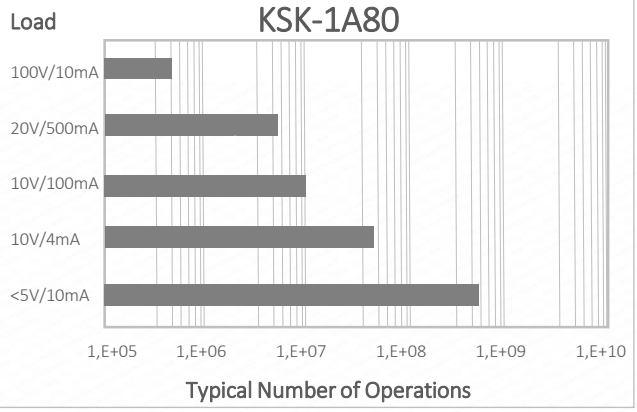

Please note: All technical specifications on this series datasheet refer to the standard product range. Modifications in the sense of technical progress are reserved. For general information only. For more specific information, please consult the product datasheet, available upon request.

This series datasheet could contain technical inaccuracies or typographical errors. Changes are periodically made to the information herein. These change will be incorporated in future revisions.

For deviating values, most current specifications and products please contact your nearest sales office.

USA: +1 866.782.6339 | salesusa@standexmeder.com EMEA: +49 7731/8399-0 | info@standexmeder.com APAC: +86 21/37606000 | salesasia@standexmeder.com