



RoHS

FEATURES

- Universal 85 - 305VAC or 120 - 430VDC Input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating temperature range: -30°C to +70°C
- Built-in active PFC function
- High I/O isolation test voltage up to 4000VAC
- Output short circuit, over-current, over-voltage, over-temperature protection
- Safety according to IEC/EN/UL62368, GB4943
- Compact size with a low 1U profile
- LED indicator for power on
- Built-in DC fan
- Emissions meets CISPR32/EN55032 CLASS B

LMF320-23Bxx series are one of Mornsun's enclosed AC-DC switching power supply. It features universal AC input and at the same time accepts DC input voltage, cost-effective, built-in active PFC function, high efficiency and high reliability. These converters offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, IEC62368, UL62368, EN62368, GB4943 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home etc.

Selection Guide

| Certification | Part No.* | Output Power (W) | Nominal Output Voltage and Current (Vo/Io) | Output Voltage Adjustable Range (V) | Efficiency at 230VAC (%) Typ. | Max. Capacitive Load (μ F) |
|---------------|--------------|------------------|--------------------------------------------|-------------------------------------|-------------------------------|---------------------------------|
| UL/CE/CCC | LMF320-23B05 | 300 | 5V/60A | 4.5 - 5.5 | 84 | 5000 |
| | LMF320-23B12 | 320.4 | 12V/26.7A | 10 - 13.2 | 86.5 | 5000 |
| | LMF320-23B15 | 321 | 15V/21.4A | 13.5 - 18 | 89 | 5000 |
| | LMF320-23B24 | 321.6 | 24V/13.4A | 20 - 26.4 | 88.5 | 5000 |
| | LMF320-23B48 | 321.6 | 48V/6.7A | 41 - 56 | 89 | 5000 |

Note: *Use suffix "C" for terminal with protective cover and suffix "Q" for conformal coating.

Input Specifications

| Item | Operating Conditions | | Min. | Typ. | Max. | Unit |
|-------------------------|----------------------|------------|------|------|------|-------------|
| Input Voltage Range | AC input | | 85 | -- | 305 | VAC |
| | DC input | | 120 | -- | 430 | VDC |
| Input Voltage Frequency | | | 47 | -- | 63 | Hz |
| Input Current | 115VAC | | -- | 4 | 4.2 | A |
| | 230VAC | | -- | 2 | 2.1 | |
| Inrush Current | 115VAC | Cold start | -- | 35 | -- | A |
| | 230VAC | | -- | 65 | -- | |
| Power Factor | 115VAC | Full load | -- | 0.98 | -- | -- |
| | 230VAC | | -- | 0.95 | -- | |
| Hot Plug | | | | | | Unavailable |

Output Specifications

| Item | Operating Conditions | | Min. | Typ. | Max. | Unit |
|-------------------------|----------------------|-----------------|------|-----------|------|------|
| Output Voltage Accuracy | Full load range | 5V | -- | ± 2 | -- | % |
| | | 12V/15V/24V/48V | -- | ± 1 | -- | |
| Line Regulation | Rated load | 5V | -- | ± 0.5 | -- | % |
| | | 12V/15V | -- | ± 0.3 | -- | |
| | | 24V/48V | -- | ± 0.2 | -- | |

| | | | | | | |
|------------------------------|------------------------------------------------------|-----------------|----|---------------------------------------|-----|------|
| Load Regulation | 0% - 100% load | 5V | -- | ±1 | -- | |
| | | 12V/15V/24V/48V | -- | ±0.5 | -- | |
| Output Ripple & Noise* | 20MHz bandwidth (peak-to-peak value) | 5V/12V/15V/24V | -- | 60 | 150 | mV |
| | | 48V | -- | 60 | 200 | |
| Temperature Coefficient | | | -- | ±0.03 | -- | %/°C |
| Minimum Load* | | | 0 | -- | -- | % |
| Hold-up Time | 115VAC | | -- | 12 | -- | ms |
| | 230VAC | | -- | 12 | -- | |
| Short Circuit Protection | Recovery time <5s after the short circuit disappear. | | | Hiccup, continuous, self-recovery | | |
| Over-current Protection* | | | | 105% - 150% Io, hiccup, self-recovery | | |
| Over-voltage Protection | 5V | | | ≤7V (Hiccup, self-recovery) | | |
| | 12V | | | ≤16.2V (Hiccup, self-recovery) | | |
| | 15V | | | ≤21.8V (Hiccup, self-recovery) | | |
| | 24V | | | ≤32.4V (Hiccup, self-recovery) | | |
| | 48V | | | ≤60.0V (Hiccup, self-recovery) | | |
| Over-temperature Protection* | | | | Hiccup, self-recovery | | |

Note: 1.*The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.

2.*Minimum load: When the product is working at a temperature above 50°C, the minimum load is 5% of the rated load, so that the fan could work at high temperature to reduce the temperature rise of the product.

3.*Over-current Protection: Test at rated output voltage, Io is rated output current load.

4.*Over-temperature Protection needs to be tested under rated full load conditions.

General Specifications

| Item | Operating Conditions | | Min. | Typ. | Max. | Unit | |
|-----------------------|--------------------------------|---------------------------------------------------------|----------------------------|------|------|-------|--|
| Isolation Test | Input - | Electric strength test for 1min., leakage current <10mA | 2000 | -- | -- | VAC | |
| | Input - output | | 4000 | -- | -- | | |
| | Output - | | 500 | -- | -- | | |
| Insulation Resistance | Input - | 500VDC, 25±5°C, Humidity < 95%RH, non-condensing | 100 | -- | -- | MΩ | |
| | Input - output | | 100 | -- | -- | | |
| | Output - | | 100 | -- | -- | | |
| Operating Temperature | | | -30 | -- | +70 | °C | |
| Storage Temperature | | | -40 | -- | +85 | | |
| Storage Humidity | Non-condensing | | 10 | -- | 95 | %RH | |
| Operating Humidity | | | 20 | -- | 90 | | |
| Switching Frequency | | | -- | -- | -- | kHz | |
| Power Derating | Operating temperature derating | -30°C to 50°C | 0 | -- | -- | %/°C | |
| | | +50°C to +70°C | 2.5 | -- | -- | | |
| | Input voltage derating | 85VAC - 100VAC@50Hz | 2.0 | -- | -- | %/VAC | |
| | | 85VAC - 100VAC@60Hz | 1.33 | -- | -- | | |
| | | 120VDC - 140VDC | 1.25 | -- | -- | | |
| Safety Standard | | | Meet IEC/EN/UL62368/GB4943 | | | | |
| Safety Certification | | | IEC/EN/UL62368/GB4943 | | | | |
| Safety Class | | | CLASS I | | | | |
| MTBF | MIL-HDBK-217F@25°C | | >250,000 h | | | | |

Mechanical Specifications



| | |
|----------------|----------------------------|
| Case Material | Metal (AL1100, SGCC) |
| Dimensions | 215.00 x 115.00 x 30.00 mm |
| Weight | 750g (Typ.) |
| Cooling Method | Forced air cooling |

Electromagnetic Compatibility (EMC)

| | | | |
|-----------|------------------|-----------------------------------------------------------------|------------------|
| Emissions | CE | CISPR32/EN55032 CLASS B | |
| | RE | CISPR32/EN55032 CLASS B | |
| | Harmonic current | IEC/EN61000-3-2 CLASS A | |
| | Voltage flicker | IEC/EN61000-3-3 | |
| Immunity | ESD | IEC/EN 61000-4-2 Contact $\pm 6\text{KV}$ /Air $\pm 8\text{KV}$ | perf. Criteria A |
| | RS | IEC/EN 61000-4-3 10V/m | perf. Criteria A |
| | EFT | IEC/EN 61000-4-4 $\pm 2\text{KV}$ | perf. Criteria A |
| | Surge | IEC/EN 61000-4-5 $\pm 1\text{KV}/\pm 2\text{KV}$ | perf. Criteria A |
| | CS | IEC/EN 61000-4-6 10 V.r.m.s | perf. Criteria A |
| | DIP | IEC/EN 61000-4-11 0%, 70% | perf. Criteria B |

Note: 1. One magnetic bead (nickel-zinc ferrite) should be coupled with the output load line during CE/RE testing.


2. The power supply is considered a component as part of system, all EMC items are tested on a metal plate (L x W x H, 450mm x 450mm x 3mm). Power supply should be combined with final equipment for EMC confirmation.

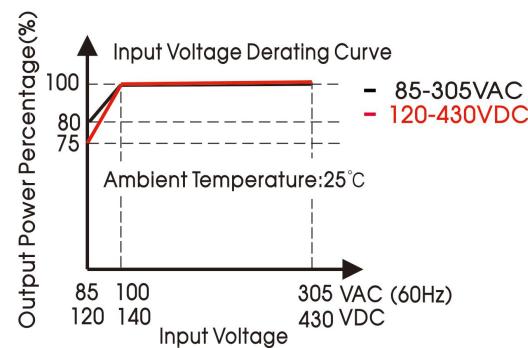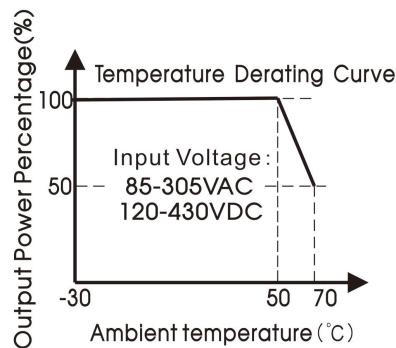Product Characteristic Curve


Note: 1. With an AC input voltage between 85-100VAC and a DC input between 120-140VDC the output power must be derated as per the temperature derating curves;

2. This product is suitable for applications using forced air cooling; for applications in closed environment please consult Mornsun FAE.

Efficiency Vs Input Voltage (Full Load)

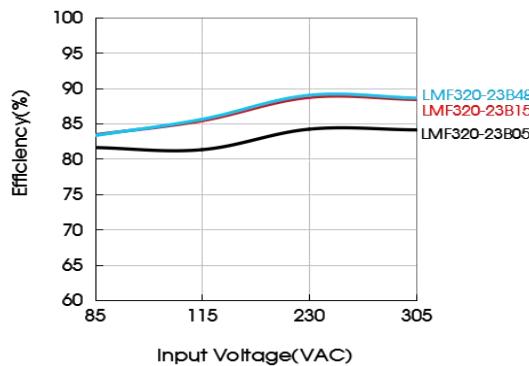

Efficiency Vs Output Load (Vin=230VAC)

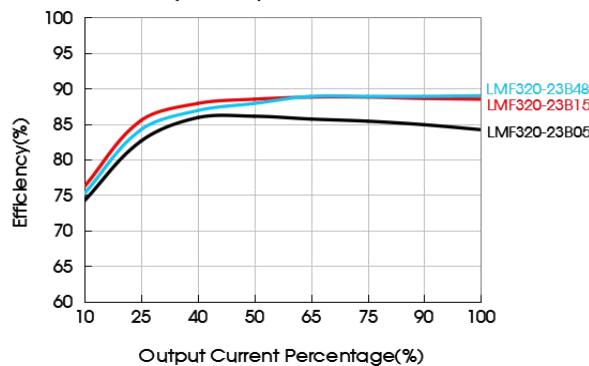


AC/DC 320W Enclosed Switching Power Supply **MORNSUN®**

LMF320-23Bxx, LMF320-23Bxx-C, LMF320-23Bxx-Q Series


Dimensions and Recommended Layout

LMF320-23Bxx, LMF320-23Bxx-Q Series

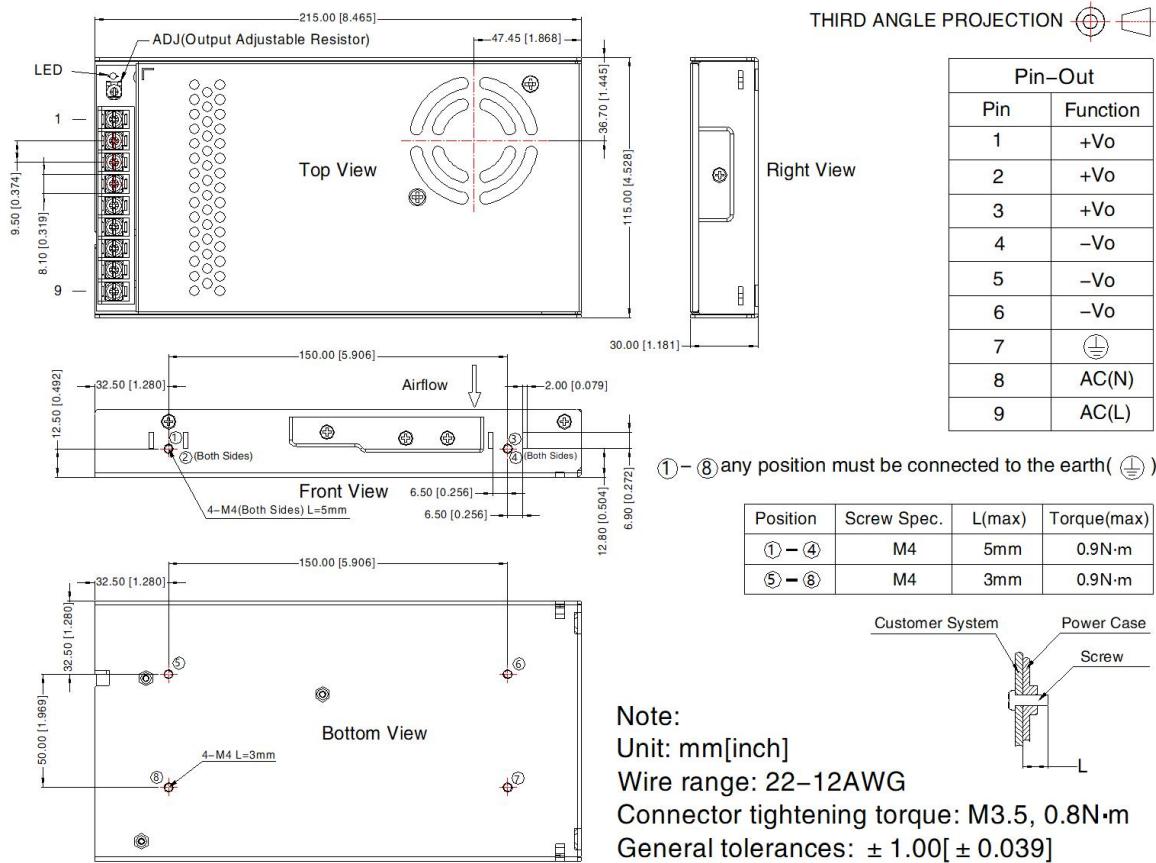

Note:
Unit: mm[inch]
Wire range: 22–12AWG
Connector tightening torque: M3.5, 0.8N·m
General tolerances: ± 1.00 [± 0.039]

LMF320-23Bxx-C Series

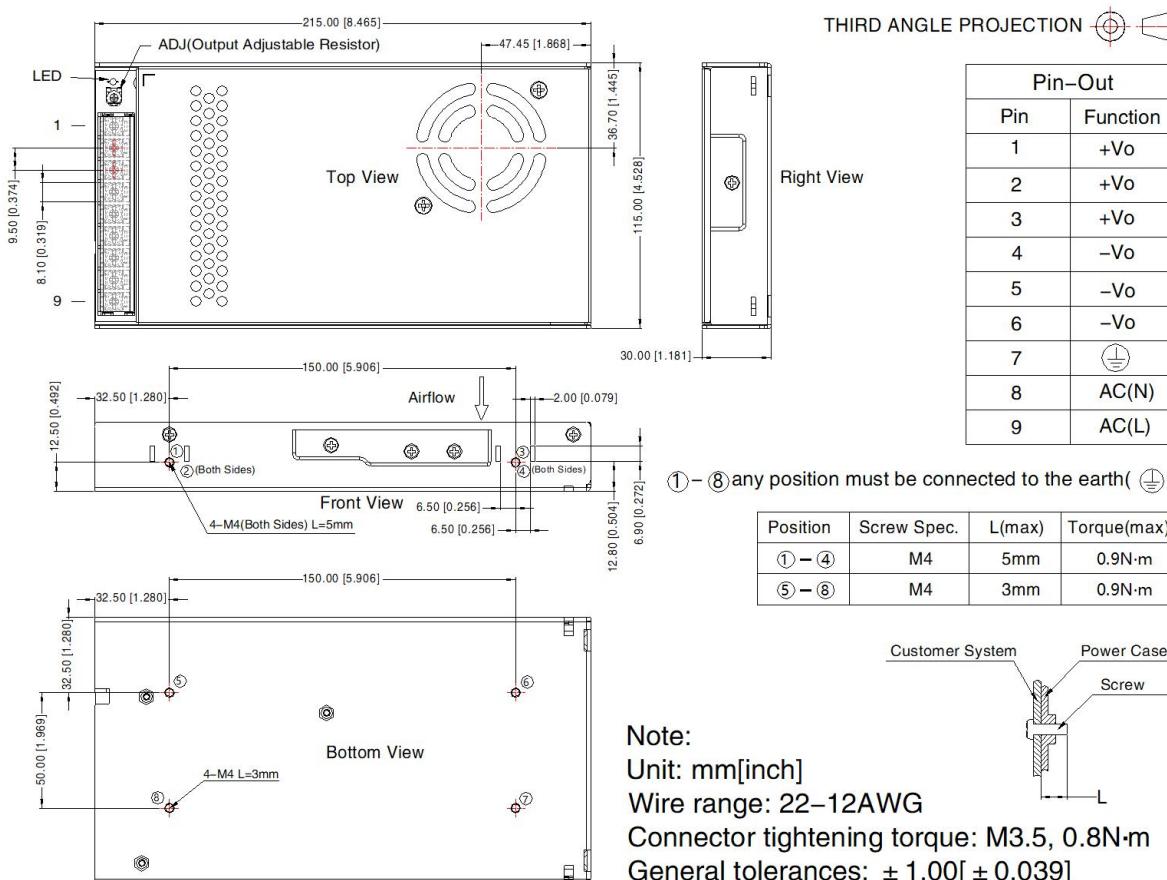

Note:
Unit: mm[inch]
Wire range: 22–12AWG
Connector tightening torque: M3.5, 0.8N·m
General tolerances: ± 1.00 [± 0.039]

Note:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220115;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75% RH with nominal input voltage and rated output load;
3. The ambient temperature derating of 5°C/1000m is needed for operating altitude greater than 2000m;
4. All index testing methods in this datasheet are based on our company corporate standards;
5. In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. The out case needs to be connected to PE (⏚) of system when the terminal equipment in operating;
9. The output voltage can be adjusted by the ADJ, clockwise to decrease;
10. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
11. The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

Betriebsanleitung und Sicherheitsinformationen

Vor Inbetriebnahme lesen!

Alle Modelle dürfen nur von qualifiziertem Fachpersonal (nach einschlägigen Normen, z. B. IEC 60364, VDE0100, VDE0105) installiert werden! Bei Funktionsstörungen oder Beschädigungen ist die Versorgungsspannung sofort zu unterbrechen und das Gerät zur Überprüfung an den Hersteller zu senden. Das Gerät ist wartungsfrei und enthält keine Servicebauteile. Interne Sicherungen (sofern vorhanden) lösen im Fehlerfall irreversibel aus

WARNING

Die Missachtung der in dieser Betriebsanleitung und den Spezifikationen enthaltenen Informationen kann einen elektrischen Schlag, Brände, schwere Unfälle und Schäden an Personen, Haus- und Nutztieren und Gütern zur Folge haben!

- Bei diesem Schaltnetzteil handelt es sich um ein Einbauteil, das in einen Schaltschrank oder ein anderes geeignetes Gehäuse einzubauen ist
- Installations- und Wartungsarbeiten dürfen nur durch eine qualifizierte Fachkraft erfolgen
- Das Berühren von Bauteilen oder freiliegenden Anschlüssen kann einen elektrischen Schlag verursachen! Vor Installations- und Wartungsarbeiten ist die Versorgungsspannung zu unterbrechen, gegen unbeabsichtigtes Wiedereinschalten zu sichern und die Wirksamkeit zu prüfen
- Aufgrund frei zugänglicher Anschlüsse ist dieses Netzteil im Betriebszustand gegen versehentliches Berühren wirkungsvoll zu sichern. Anschlussklemmen sind mit Berührungsenschutz zu versehen. Im Innern herrschen gefährliche Spannungen. Bei Vorhandensein eines Gehäuses darf dieses nicht geöffnet werden
- Die auf dem Typenschild angegebenen Spezifikationen sind einzuhalten. Achten Sie auf die korrekte Spannung und Polarität, sowie die Eignung des Netzteils für die vorgesehene Verwendung. Die angeschlossene Last darf die Nennwerte für Ausgangsstrom und -leistung nicht überschreiten. Einschlägige Normen und Unfallverhütungsvorschriften (UVV) zu Einbau, Anschluss und Betrieb sind zu beachten. Bei Vorhandensein eines Erdanschlusses (FG) muss dieser geerdet sein
- Bei Funktionsstörungen oder Beschädigungen umgehend von der Versorgungsspannung trennen und gegen weitere Verwendung sichern
- Das Netzteil darf nur in trockenen Innenräumen verwendet werden, nicht abgedeckt oder direkter Sonneneinstrahlung ausgesetzt werden. Nicht in der Nähe von Wärmequellen betreiben. Die zulässige Umgebungstemperatur ist dem Datenblatt oder den Spezifikationen zu entnehmen
- Dieses Schaltnetzteil ist nach den gültigen EMV-Richtlinien und -Normen entwickelt worden. Es ist als Komponente bewertet und für den Einbau in ein Endgerät entwickelt. Nach dem Einbau müssen die elektromagnetischen Eigenschaften des Endgeräts erneut überprüft werden

Bestimmungsgemäßer Gebrauch

Dieses Schaltnetzteil ist als Stromversorgung von Niederspannungsverbrauchern entwickelt worden und erfüllt die Anforderungen der entsprechenden europäischen Richtlinien. Das Netzteil ist als Komponente für den Einbau in ein Endgerät oder eine elektrische Anlage bestimmt und ist mit einem geeigneten Gehäuse zu versehen

Hinweis

Durch Kombination oder Zusammenstellung von Betriebsmitteln mit CE-Kennzeichnung entsteht nicht zwangsläufig ein konformes System. Eine erneute Bewertung der Einhaltung der vorgeschriebenen Richtlinien durch den Hersteller des Gesamtsystems ist vorzunehmen



Entsorgung

Dieses Gerät darf nicht im Haushalt entsorgt werden. Entsorgen Sie es über eine Sammelstelle für Elektronik-Altgeräte. Weitere Informationen sowie die nächstgelegene Abgabestelle finden Sie im Internet unter www.ElektrOg.de – WEEE-Reg.-Nr.: DE 26967630

User Manual and Safety Information

Read Before Use!

All models must be installed by a qualified technician only! Adhere to relevant industry standards (e.g. IEC 60364, VDE0100, VDE0105). Disconnect from mains supply in case of malfunction or damage and send the unit to the manufacturer for inspection. The unit is maintenance-free and does not contain serviceable parts. In fault condition internal fuses (if existing) trip off irreversibly

WARNING

Not adhering to the instructions contained in this manual and the product specifications might cause electric shock, fires, severe accidents, injuries, and damages to persons, animals and property!

- This switching power supply is classified as a component and is to be installed into a control cabinet or an appropriate enclosure
- Installation and maintenance is to be performed by a qualified technician only
- Contact with parts or exposed connections can cause an electric shock! Prior to installation or maintenance disconnect from mains power supply and secure effectively against accidental re-powering. Check effectiveness of measure
- In operating condition an effective protection against accidental contact to live parts is required. Connecting terminal must be outfitted with touch protection. Dangerous voltages occur on the inside of the unit. If existing, the housing must not be opened
- Adhere to the specifications on the nameplate. Check for correct voltage and polarity, as well as the suitability of the power supply for the intended use. Load must not exceed nominal values. Relevant industry standards and accident-prevention regulations for installation, connection and operation must be observed. Ground (FG), if any exists, must be connected to earth ground
- Any defective or faulty unit must not be operated and is to be disconnected from mains power immediately and secured against further use
- For dry indoor environments only. Keep dry and out of direct sunlight, do not cover. Do not operate near heat sources. Retrieve information on permissible ambient conditions from specification or datasheet
- This power supply is designed in accordance with valid EMC regulations and standards. Since being classified as a component for integration into a system, the electromagnetic characteristics of the system are to be re-evaluated

Intended Use

This switching power supply is intended for powering low voltage consuming devices and is in conformance with relevant European Directives. The unit is classified as a component for integration into a device or system and is to be installed into a control cabinet or an appropriate enclosure

Notice

Combination or assembly of different units bearing a CE mark does not necessarily form a compliant system. Re-evaluation of conformity to the mandatory directives is to be performed by the manufacturer of the completed system



Disposal

This device must not be disposed of in domestic waste. Always dispose of electronic appliances at the designated collection facilities. For more information refer to www.ElektrOg.de – WEEE-Reg.-Nr.: DE 26967630