

LED Rechargeable Table Luminaire TAVOLA SOLAR 1,5W Instruction Manual


MEGATRON®

TECHNICAL SPECIFICATIONS

Model No.	MT68059
Wattage	1,5W
Color temperature	2700K (Ra80) warmwhite
Solar cell	0,3Wp
Charging time Solar Panel	up to 40 hours depending on solar radiation
Charging time charger	up to 4-5h (100%)
Operating time	up to 8h (100%)
Lumen Light source	250lm
Lumen containing product	150lm
Lifetime (LED-Modul)	20.000h
Input current	AC 100-240V, ~50/60Hz
Output current	DC5V, 1A
IP Rating	IP54
Material	Die-cast Aluminum/PC
Dimension (mm)	Ø110mm x H: 380mm
Rechargeable Lithium-Ion-Battery	18650 3,7V 2.200mAh

Rechargeable Battery

Type	18650 Lithium-Ion
Capacity	2200mAh (7,4Wh)
Voltage	DC3,7V

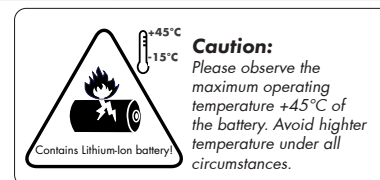

Please read the entire instruction manual carefully before installation and operation.

CAUTIONS:

- Ideal for restaurants and private households as well as for indoor and outdoor use (garden, inhouse, camping).
- Bright warm white LED chips for up to 250lm luminous flux.
- Dimmable from 100% - 5% - by long press on the touch switch.
- Rechargeable Lithium-Ion battery for up to 8 hours of light duration.
- The battery is delivered partially charged. Please charge the LED table luminaire before first usage.
- Includes USB-C charging cable (1.5m) and 100-240V USB-C charger.
- Use a clean and dry cloth for cleaning.
- Do not use chemicals to clean the luminaire.
- Avoid use in extreme heat: Observe the ambient temperature range of -15°C to +45°C.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person. ⚠


CHARGING:




- To charge the light, place the light in sunlight and charge the light via the solar panel. Alternatively, first insert the USB-C magnetic adapter (see Figure A) into the USB-C socket of the light, then make sure it is firmly seated. During charging, the charging indicator on the bottom of the light head will glow red. When the battery is full, the charging indicator will turn green.
- Charging time via USB-C: 4-5 hours.
- Use the included charger only together with the LED table luminaire TAVOLA SOLAR.
- The charger must not be used outdoor and is not allowed to come into contact with moisture (rain, splash water, liquids).
- Do not leave the charger in the socket after charging is complete or when the charger is not in use.
- Never attempt to open the charger. Risk of electric shock!
- Keep the charger out of the reach of children.

OPERATION:

- Press the touch switch to turn on and off.
- Press the touch switch longer to dim up or down.

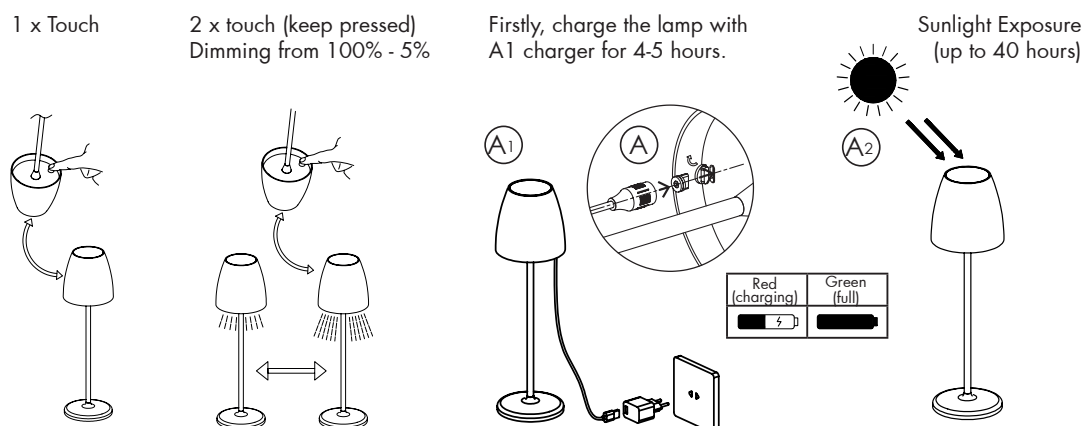

Battery & Lamp Disposal

 This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device or the used rechargeable battery, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling. Batteries containing hazardous substance are marked by a recycling symbol and chemical symbols (Cd, Hg or Pb) of the hazardous substances involved.

