


C1 User Manual

English

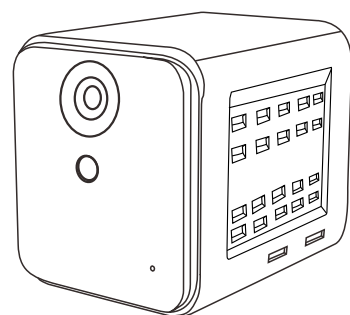

✉ service@javis-cam.com

Thank you for choosing our product.

Customer service email:
service@javis-cam.com

Notice

1. Most importantly: only use this camera where your phone has a good signal. Don't need WiFi.
2. The radar used for detecting motions can work through window and glass. It will capture motions happened in 15 meters (50 ft).
3. More detected motions cost more power and data.
4. Please don't place the camera too close to the window unless you don't need good night vision. Minimum distance from window: 1 meter (3 ft).
5. No waterproof. Strong ultraviolet light from the daylight might cause the dark color become purple.
6. Adhesive for the auxiliary role of limited time use, long-term use is recommended to screw fixed

- 1 -

APP Download


Please scan the QR code below to download UBox APP for this camera.
Or search **UBox** in App Store or Google Play.



Download App(IOS&android)

After APP installed, please register and login into your own UBox account.

Buttons and card slots

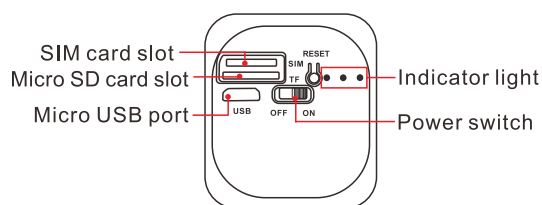

- 2 -

Indicator Light

Blue & red light both on	Booting up
Blue light solid on	Ready for QR code scan, or in live view
Blue light flashing	Searching for signal
Red light flashing	Recording
Green light on	Charging
Green light off	Not charging, or fully charged

SIM card & data

The SIM card provided with this camera has 100M data for free.

You can recharge the card in the APP after Internet connection. Or you can use your own SIM card that already have data inside.

Storage method

Using memory card:

1. Please format it before first-time use. Plug in the memory card when the camera is turned OFF.
2. After a 4G Network connection & setup through APP, the camera can still work automatically even if disconnected from the 4G Network. it will keep recording and save videos on the card.


Using cloud storage:

Only motion-detection videos will be saved on cloud storage.

- 3 -

4G Network connection

Instruction videos, see the last page.

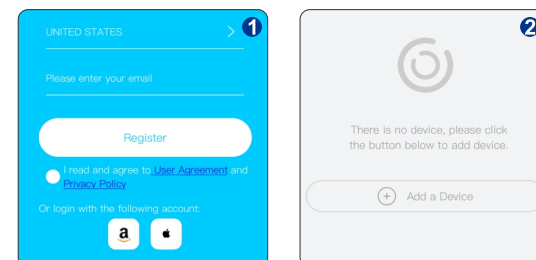

1. Open the UBox APP. Register for your own account.
2. Click "Add a device". Then select "Set up 4G Device".



3. Turn on your camera and wait for a minute. If the blue light keeps flashing, please move your camera to another place where your phone has better signal. Click "Next" when the blue light is solid on.

- 4 -

4. After scanning the code, if the APP says the camera need to be reset after, please reset it by pressing on the reset button for 5 seconds. And try the above process again.



5. Use your mobile phone to scan the QR code on the back of your camera.
6. The system will handle the connection. Please wait for the response in APP. Set a name for the camera and it's all done!

Installation

The 3M tape on the back of the holder is not strong enough to keep the camera from failing on rough walls, wooden surface and windows.


If you already found a good spot for your camera, please use the screws in the box to mount your camera tightly.

You can take the camera out of the holder when it needs a charge.

- 5 -

Device list interface

In this page, you can see all the devices you own.

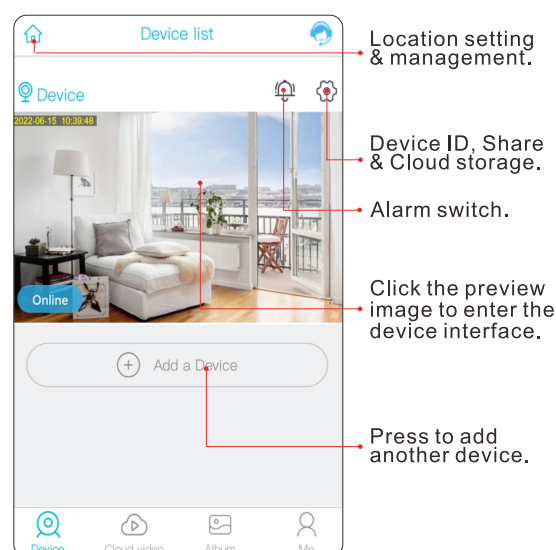


- Location setting & management.
- Device ID, Share & Cloud storage.
- Alarm switch.
- Click the preview image to enter the device interface.
- Press to add another device.

- 6 -

Device interface

You can see the live view of your camera, watch playback of the recorded motion detection videos and make important settings.

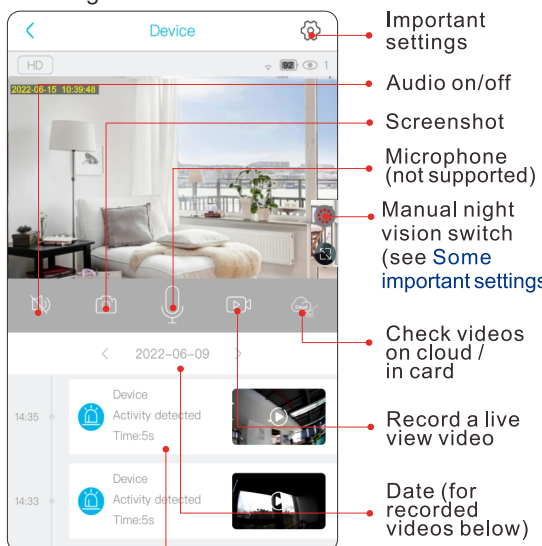

- Important settings
- Audio on/off
- Screenshot
- Microphone (not supported)
- Manual night vision switch (see Some important settings)
- Check videos on cloud / in card
- Record a live view video
- Date (for recorded videos below)
- Recorded motion detection videos

- 7 -

Some important settings

Motion detection: In "**Detection sensitivity**". If turned on, camera will record when detecting any motion.

Video length: In "**Recording time**". Add extra video length for every motion detection video. Set to "**Fulltime record**" for continuous video recording.

Night vision: In "**Scene mode**". "**Normal**" for automatic night vision. "**Night vision mode**" for manual control in the live view interface. (see [Device interface](#))

Automatic reconnection: If the camera lost the signal, it will try to reconnect with the internet automatically. In "**Retry time**", you can set the time gap between each retry attempt if the camera has no signal.

Path to top up data

In the "**Device list**" interface, select your 4G camera, click the gear icon on the top right. Then, select "**4G data service**". You can check the packages and recharge the data here.

- 8 -

🌐 www.javis-cam.com
✉ service@javis-cam.com

User guide videos
www.youtube.com/@JAVISCAM



EC	REP	eVatmaster Consulting GmbH Bettinastr.30 60325 Frankfurt am Main, Germany
UK	REP	EVATOST CONSULTING LTD Suite 11 First Floor, Moy Road Business Centre, Taffs Well, Cardiff, Wales, CF15 7QR


Manufacturer: Shenzhen Huang Wei Technology Co., Ltd
Address: 401, 2105 Longgang Avenue, Henggang Street,
Longgang District, Shenzhen city, Guangdong
Province, China



FCC ID: 2A5FR-H5 Made in China

C1 Benutzerhandbuch

Deutsch

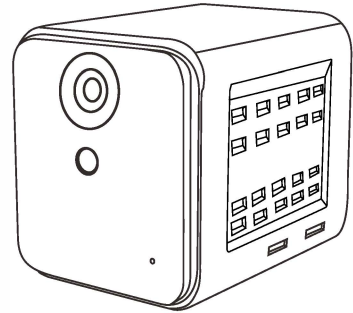

service@javis-cam.com

Vielen Dank, dass Sie sich für unser Produkt entschieden haben.
Kundenservice E-Mail:

service@javis-cam.com

Notice

1. Das Wichtigste: Verwenden Sie diese Kamera nur dort, wo Ihr Telefon ein gutes Signal hat. **Sie brauchen kein WiFi.**
2. Das Radar, das zur Bewegungserkennung verwendet wird, kann durch Fenster und Glas hindurch arbeiten. Es erfasst Bewegungen, die in einem Umkreis von 15 Metern (50 ft) geschehen.
3. Mehr erkannte Bewegungen kosten mehr Energie und Daten.
4. Bitte platzieren Sie die Kamera nicht zu nahe am Fenster, es sei denn, Sie benötigen keine gute Nachtsicht. Minimaler Abstand zum Fenster: 1 Meter (3 ft).
5. Nicht wasserdicht. Starkes ultraviolettes Licht vom Tageslicht kann die dunkle Farbe lila werden lassen.

- 1 -


Kostenlose APP herunterladen

Bitte scannen Sie den QR-Code unten, um die UBox APP für diese Kamera herunterzuladen.
Oder suchen Sie "UBox" im App Store oder bei Google Play.

App herunterladen
(iOS & Android)

Nachdem Sie die APP installiert haben, registrieren Sie sich bitte und melden Sie sich bei Ihrem eigenen UBox-Konto an.

Tasten und Kartenfächer

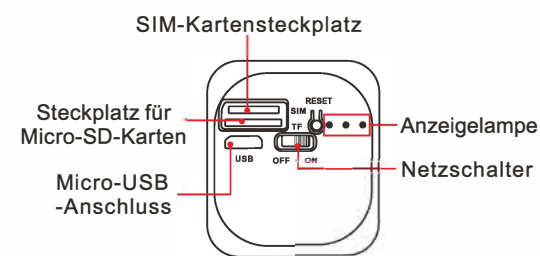

- 2 -

Kontrollleuchte

Blaues und rotes Licht leuchten beide	Hochfahren
Blaues Licht leuchtet dauerhaft	Bereit zum Scannen von QR-Codes oder in der Live-Ansicht
Blaues Licht blinkt	Suche nach dem Signal
Rotes Licht blinkt	Aufnahme
Grünes Licht an	Aufladen der Batterie
Grünes Licht aus	Nicht geladen oder voll geladen

SIM-Karte und Daten

Die mit der Kamera gelieferte SIM-Karte hat 100M Daten gratis.

Sie können die Karte in der APP nach der Internetverbindung wieder aufladen. Oder Sie können Ihre eigene SIM-Karte verwenden, die bereits Daten enthält.

Speicherverfahren

Verwendung der Speicherkarte:


1. Bitte formatieren Sie sie vor dem ersten Gebrauch. Stecken Sie die Speicherkarte ein, wenn die Kamera ausgeschaltet ist.
2. Nach einer 4G-Netzwerkverbindung und der Einrichtung über die APP kann die Kamera automatisch weiterarbeiten, auch wenn die Verbindung zum 4G-Netzwerk unterbrochen wird.

Cloud-Speicher verwenden:
Nur Bewegungserkennungsvideos werden im Cloud-Speicher gespeichert.

- 3 -

Internetverbindung

Anleitungsvideos, siehe die letzte Seite.

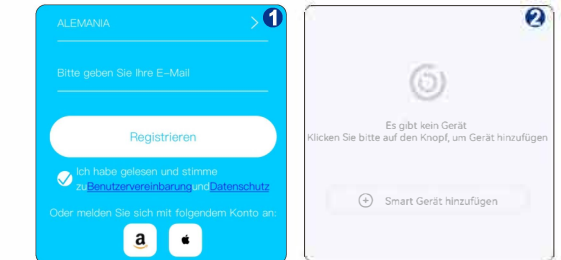

1. Öffnen Sie die UBox APP. Registrieren Sie sich für Ihr eigenes Konto.
2. Klicken Sie auf "Gerät hinzufügen" und wählen Sie dann "4G-Gerät installieren".



3. Schalten Sie Ihre Kamera ein und warten Sie eine Minute lang. Wenn das blaue Licht immer wieder blinkt, bringen Sie die Kamera an einen anderen Ort, an dem Ihr Telefon einen besseren Empfang hat. Klicken Sie auf "nächster Schritt", wenn das blaue Licht dauerhaft leuchtet.

- 4 -

4. Wenn die APP nach dem Scannen des Codes sagt, dass die Kamera zurückgesetzt werden muss, setzen Sie sie bitte zurück, indem Sie 5 Sekunden lang auf die Reset-Taste drücken. Und versuchen Sie den oben genannten Prozess erneut.



5. Scannen Sie mit Ihrem Mobiltelefon den QR-Code auf der Rückseite Ihrer Kamera.

6. Das System wird die Verbindung herstellen. Bitte warten Sie auf die Antwort in der APP. Legen Sie einen Namen für die Kamera fest, und das war's schon!

Installation

Das 3M-Klebeband auf der Rückseite der Halterung ist nicht stark genug, um zu verhindern, dass die Kamera an rauen Wänden, Holzoberflächen und Fenstern scheitert.


Wenn Sie bereits einen guten Platz für Ihre Kamera gefunden haben, verwenden Sie bitte die Schrauben in der Box, um Ihre Kamera fest zu befestigen.

Sie können die Kamera aus der Halterung nehmen, wenn sie aufgeladen werden muss.

- 5 -

Schnittstelle zur Geräteliste


Auf dieser Seite können Sie alle Geräte sehen, die Sie besitzen.

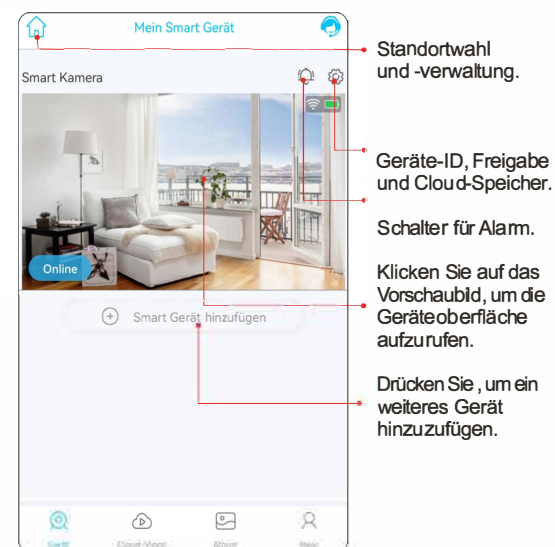

- 6 -

Schnittstelle zum Gerät

Sie können die Live-Ansicht Ihrer Kamera sehen, die Wiedergabe der aufgezeichneten Bewegungserkennungsvideos ansehen und wichtige Einstellungen vornehmen.

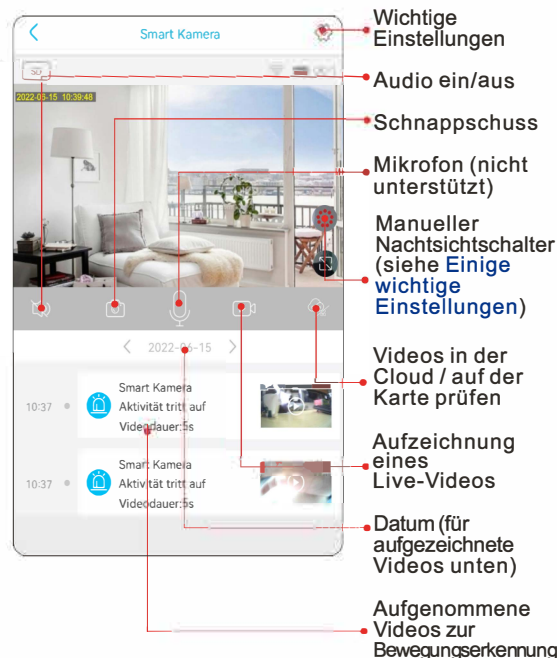

- 7 -

Einige wichtige Einstellungen

Bewegungserkennung: Unter "Erkennungsempfindlichkeit". Wenn diese Option aktiviert ist, nimmt die Kamera auf, wenn eine Bewegung erkannt wird.

Videolänge: Unter "Zeit der Aufzeichnung". Fügen Sie für jedes Bewegungserkennungsvideo eine zusätzliche Videolänge hinzu. Stellen Sie "Vollzeitaufnahme" für eine kontinuierliche Videoaufnahme ein.

Nachtsicht: Nachtsicht: Im "Szenenmodus". "Normaler Modus" für automatische Nachtsicht. "Nachtsichtmodus" für die manuelle Steuerung in der Live-View-Schnittstelle. (siehe Schnittstelle zum Gerät)

Automatische Wiederherstellung der Verbindung: Wenn die Kamera das Signal verloren hat, wird sie automatisch versuchen, die Verbindung zum Internet wiederherzustellen. Unter "Wiederherstellen der Verbindung" können Sie die Zeitspanne zwischen den einzelnen Wiederholungsversuchen einstellen, wenn die Kamera kein Signal hat.

Pfad zum Aufladen der Daten

Wählen Sie auf der Oberfläche "Mein Smart Gerät" Ihre 4G-Kamera aus und klicken Sie auf das Zahnradsymbol oben rechts. Wählen Sie dann "4G-Verkehrsdienst". Hier können Sie die Pakete prüfen und die Daten aufladen.

- 8 -

www.javis-cam.com
service@javis-cam.com

Videos zum Benutzerhandbuch
www.youtube.com/@JAVISCAM



EC	REP	eVatmaster Consulting GmbH Bettinastr.30 60325 Frankfurt am Main, Germany
UK	REP	EVATOST CONSULTING LTD Suite 11 First Floor, Moy Road Business Centre, Taffs Well, Cardiff, Wales, CF15 7QR

Manufacturer: Shenzhen Huang Wei Technology Co., Ltd
Address: 401,2105 Longgang Avenue, Henggang Street,
Longgang District, Shenzhen city, Guangdong
Province, China



FCC ID: 2A5FR-H5 Made in China