

SAI M23 CRIMPING TOOL 2**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



Weidmüller har ett brett utbud av verktyg och tillbehör för givar-/ställdonsledningar.

Allmänna beställningsdata

Typ	SAI M23 CRIMPING TOOL 2
Art.nr.	1203960000
Artikelbeteckning	Sensor/Aktuator-Stickanslutning
GTIN (EAN)	4050118000764
Frp	1 Stück

SAI M23 CRIMPING TOOL 2

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Tekniska data

Mått och vikter

Nettovikt 478 g

Temperaturer

Driftstemperatur, max 125 °C Driftstemperatur, min. -40 °C

Allmänna data

Ledarytterdiameter -

Klassificeringar

ETIM 5.0	EC002223	ETIM 6.0	EC000168
eClass 6.2	21-04-38-90	eClass 7.1	21-04-38-90
eClass 8.1	21-04-38-90	eClass 9.0	21-04-38-11
eClass 9.1	21-04-38-11		

Godkännanden

Godkännanden



Downloads

Broschyr/Katalog [CAT 8 SAI 15/16 EN](#)
[FL FIELDWIRING EN](#)

Adjustment mechanism to set the crimping and locator position

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com


Adjusting the crimping dimensions

The adjustment mechanism is used to set the crimping depth of the crimping mandrel as described below.

The adjusting dial is used to prepare the feed; the dial can be turned clockwise (for decreasing the dimension) or counter-clockwise (for increasing the dimension).

Adjustment precision

- 1 division mark on the dial v 1/100 mm adjustment
- 1 complete revolution of the dial v 0.2 mm adjustment read from scale
- 5 revolutions of the dial v 1 mm adjustment read from scale

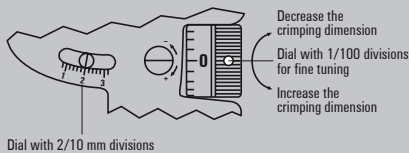

Verifying the crimping dimension

The four-mandrel crimping tool is pre-set at the factory. The actual crimping size should still be checked periodically. It should be checked using the plug gauge (Ø 1.0 mm) that is included with the crimping tool as described below. Use the dial on the stationary tool shank to set the size to 1.0 mm on the scale. Set to the zero-point tick mark on the dial and close the tool. (Refer to the diagram showing the crimping size adjustment.) At this setting, it should be possible to move the 1.00-mm-Ø plug gauge without any play or extra room. If this is not possible, then the size deviation (+/-) can be determined using the dial's fine-adjustment mechanism. If this size check reveals that the tool is not within the tolerance range specified by the manufacturer of the contacts, then you should contact the manufacture of the tool for further inspection.

Servicing and maintenance

Before you start to use the hand crimping tool, it must be clean and in proper working condition. Crimp residue or fragments must be removed from the crimping jaws and locator. The joints should be regularly lubricated using machine oil to protect them from dirt. Make sure that all bolts are secured with locking rings.

Technical data

Crimp contact	Wire cross-section (mm ²)	Crimping mandrel adjustment	Locator position	Order No.			
Crimp male 1 mm	0.14	0.86	1	1170150000			
	0.25	0.90					
	0.34	0.95					
	0.56	0.98					
	0.75	1.03					
	1.00	1.08					
Crimp female 1 mm (0.08-0.56 mm ²)	0.08	0.75	2	1995860000			
	0.14	0.78					
	0.25	0.82					
	0.34	0.86					
	0.56	0.90					
	Crimp female 1 mm (0.34-1.00 mm ²)	0.34			0.77	2	1170180000
0.56		0.82					
0.75		0.88					
1.00		0.95					
Crimp male 1.5 mm		0.14	0.65	3	1170220000		
		0.25	0.68				
	0.34	0.72					
	0.56	0.81					
	0.75	0.95					
	1.00	1.07					
Crimp female 1.5 mm (0.14-0.75 mm ²)	0.14	0.70		1170230000			
	0.25	0.73					
	0.34	0.77					
	0.56	0.85					
	0.75	1.05					
	Crimp female 1.5 mm (0.34-1.00 mm ²)	0.34			0.88		1170240000
0.56		0.95					
0.75		1.05					
1.00		1.13					
Crimp male 2.0 mm		0.75	1.20		1170250000		
		1.00	1.35				
	1.50	1.45					
	2.50	1.60					
	Crimp female 2.0 mm	0.75	1.25				1170260000
		1.00	1.35				
1.50		1.45					
2.50		1.60					

Ordering data

Type	Order No.
SAI M23 CRIMPING TOOL 2	1203960000