


Total solder points: 274

Difficulty level: *beginner* 1  2  3  4  5  *advanced*

## PIC<sup>®</sup> programmer and experiment board

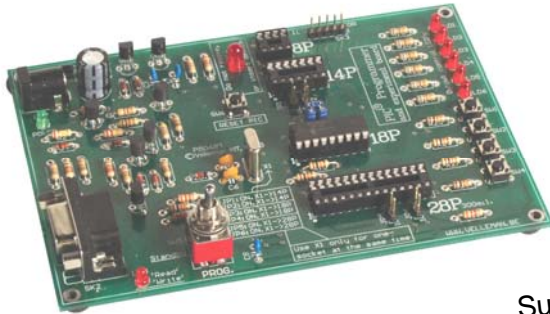

# *K8048*

Suitable for programming Microchip<sup>®</sup>  
Flash PIC<sup>™</sup> microcontrollers.

👉 **Basic programming knowledge  
is required**

This device complies with Part 15 of the FCC Rules provided the enclosed instructions are followed to the letter. Use of the device is subject to the following conditions: (1) this device must not cause harmful interference and (2) the operation of this device should not be influenced by unwanted interference.

More information about FCC can be look at <http://www.fcc.gov>



- FR** Vous trouverez la traduction de cette notice sur le CD, avec d'autres informations
- NL** Vertaling van deze handleiding, als ook meer gegevens kan men terugvinden op de CD.
- UK** The translation of this manual and all other information can be found on the CD.
- D** Dieübersetzung dieser anleitung und alle anderen Informationen finden Sie auf der CD.
- S** Svensk Bruksanvisning och annan information finns på medföljande CD.
- SF** Tämän käyttöohjeen sekä muun informaation suomenkielinen käännös on oheisella CD:llä.
- I** La traduzione di questo manuale e tutte le informazioni concernenti l'unità possono essere trovate sul CD.
- DK** Oversættelsen af denne manual, samt alle øvrige informationer vedrørende enhederne, kan findes på CD'en.
- SP** La traducción de este manual de instrucciones y toda otra información sobre los dispositivos se encuentran en el CD
- P** A tradução deste Manual e toda a informação referente às unidades pode ser encontrada no CD

**Features:**

- ☑ Suitable for programming Microchip® FLASH PIC(tm) microcontrollers
- ☑ Supports 4 different 300 mil. PICs: 8p, 14p, 18p and 28p
- ☑ Test buttons and LED indicators to carry out educational experiments, such as the enclosed programming examples
- ☑ Easy connection to a PC through the serial port
- ☑ Enclosed is a Flash Microcontroller (PIC16F627) that can be reprogrammed up to 1000 times for experimenting at will
- ☑ Software to compile and program your source code is included

**Specifications:**

- Power supply: 12 or 15V DC, min. 300mA, non-regulated adapter (PS1205/PS1208/PS1508 5230Vac); PS1208USA (115Vac))
- Supports these FLASH microcontrollers:  
PIC12F629, PIC12F675, PIC16F83, PIC16F84(A), PIC16F871, PIC16F872, PIC16F873, PIC16F874, PIC16F876, PIC16F627(A), PIC16F628(A), PICF630, ...
- Dimensions: 145 x 100mm (5.75" x 4")

**Minimum system requirements:**


- ✔ IBM Compatible PC, Pentium or better
- ✔ Windows™ 95/98/ME/NT/2000/XP
- ✔ CDROM
- ✔ free serial RS232 port

**1. Assembly (Skipping this can lead to troubles !)**

Ok, so we have your attention. These hints will help you to make this project successful. Read them carefully.

**1.1 Make sure you have the right tools:**

- A good quality soldering iron (25-40W) with a small tip.
- Wipe it often on a wet sponge or cloth, to keep it clean; then apply solder to the tip, to give it a wet look. This is called 'thinning' and will protect the tip, and enables you to make good connections. When solder rolls off the tip, it needs cleaning.
- Thin raisin-core solder. Do not use any flux or grease.
- A diagonal cutter to trim excess wires. To avoid injury when cutting excess leads, hold the lead so they cannot fly towards the eyes.
- Needle nose pliers, for bending leads, or to hold components in place.
- Small blade and Phillips screwdrivers. A basic range is fine.

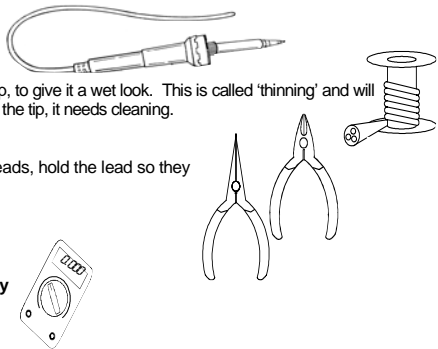

**For some projects, a basic multi-meter is required, or might be handy**


**1.2 Assembly Hints :**

- ⇒ Make sure the skill level matches your experience, to avoid disappointments.
- ⇒ Follow the instructions carefully. Read and understand the entire step before you perform each operation.
- ⇒ Perform the assembly in the correct order as stated in this manual
- ⇒ Position all parts on the PCB (Printed Circuit Board) as shown on the drawings.
- ⇒ Values on the circuit diagram are subject to changes.
- ⇒ Values in this assembly guide are correct\*
- ⇒ Use the check-boxes to mark your progress.
- ⇒ Please read the included information on safety and customer service



\* Typographical inaccuracies excluded. Always look for possible last minute manual updates, indicated as 'NOTE' on a separate leaflet.

**1.3 Soldering Hints :**


1- Mount the component against the PCB surface and carefully solder the leads



2- Make sure the solder joints are cone-shaped and shiny




3- Trim excess leads as close as possible to the solder joint




**REMOVE THEM FROM THE TAPE ONE AT A TIME !**

**AXIAL COMPONENTS ARE TAPED IN THE CORRECT MOUNTING SEQUENCE !**




## 1. Diodes. Watch the polarity!

- D1 : 1N4007
- D2 : 1N4148
- D3 : 1N4148
- D4 : 1N4148
- D5 : 1N4148
- D6 : 1N4148
- D7 : 1N4148




## 2. Zenerdiodes. Watch the polarity!



- ZD1 : 8V2


## 3. Resistors



- R1 : 15K (1 - 5 - 3 - B)
- R2 : 220K (2 - 2 - 4 - B)
- R3 : 4K7 (4 - 7 - 2 - B)
- R4 : 1K (1 - 0 - 2 - B)
- R5 : 15K (1 - 5 - 3 - B)
- R6 : 220K (2 - 2 - 4 - B)
- R7 : 4K7 (4 - 7 - 2 - B)
- R8 : 1K (1 - 0 - 2 - B)
- R9 : 4K7 (4 - 7 - 2 - B)
- R10 : 3K3 (3 - 3 - 2 - B)
- R11 : 4K7 (4 - 7 - 2 - B)
- R12 : 330 (3 - 3 - 1 - B)
- R13 : 15K (1 - 5 - 3 - B)
- R14 : 3K3 (3 - 3 - 2 - B)
- R15 : 3K3 (3 - 3 - 2 - B)
- R16 : 1K (1 - 0 - 2 - B)
- R17 : 10K (1 - 0 - 3 - B)
- R18 : 10K (1 - 0 - 3 - B)
- R19 : 680 (6 - 8 - 1 - B)
- R20 : 680 (6 - 8 - 1 - B)


- R21 : 680 (6 - 8 - 1 - B)
- R22 : 680 (6 - 8 - 1 - B)
- R23 : 680 (6 - 8 - 1 - B)
- R24 : 680 (6 - 8 - 1 - B)
- R25 : 10K (1 - 0 - 3 - B)
- R26 : 10K (1 - 0 - 3 - B)
- R27 : 10K (1 - 0 - 3 - B)
- R28 : 10K (1 - 0 - 3 - B)
- R29 : 1K (1 - 0 - 2 - B)
- R30 : 10K (1 - 0 - 3 - B)
- R31 : 3K3 (3 - 3 - 2 - B)

## 4. Capacitors



- C2 : 100nF (104, u1)
- C3 : 100nF (104, u1)
- C4 : 100nF (104, u1)
- C6 : 18pF (18)
- C7 : 18pF (18)
- C8 : 100nF (104, u1)

### 5. Push buttons




SW1  
 SW2  
 SW3  
 SW4  
 SW6

KRS0611

### 6. IC sockets, Watch the position of the notch!


IC1 : 8P  
 IC2 : 14P  
 IC3 : 18P  
 IC4 : 28P




### 7. LEDs. Watch the polarity !

LD1 : 3mm  
 LD2 : 3mm  
 LD3 : 3mm  
 LD4 : 3mm  
 LD5 : 3mm  
 LD6 : 3mm  
 LD8 : 3mm

RED




LD7 : 3mm GREEN



### 8. Transistors.

T1 : BC547  
 T2 : BC547  
 T3 : **BC557**  
 T4 : BC547  
 T5 : BC547




### 9. Voltage regulator

VR1 : UA78L12  
 VR2 : UA78L05




### 10. Header

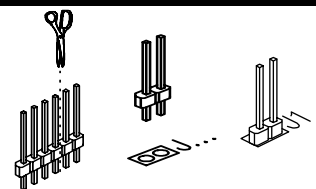


JP1 : 2P  
 JP2 : 2P  
 JP3 : 2P  
 JP4 : 2P  
 JP5 : 2P  
 JP6 : 2P

□ SK3 : 5P




12. DC - Jack



□ SK1 : 15VDC (Power)


13. Sub D - connector




□ SK2 : RS232 (9p female)

14. Quartz crystal

□ X1 : 4MHz




15. Electrolytic Capacitor.  
Watch the polarity !




□ C1 : 220 $\mu$ F

11. Blinking LED. Watch the  
polarity!



□ LD9 : Blinking red (5mm)

16. Switch



□ SW5 : 3 pos. / 2 pole

ON - OFF - ON  
Run / Standby / Prog)



## 17. Rubber feet

Mount the rubber feet on the solder side of the PCB, see fig 1.0.


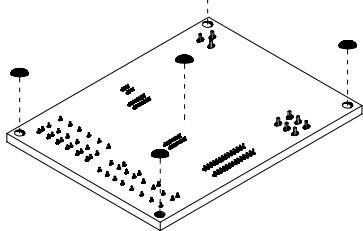



FIG 1.0

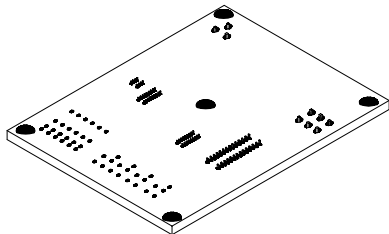


## 18. Software installation

- Place the Velleman® software CD in your CD-ROM player.
- Select 'Browse through this CD for other Velleman software' (this message will not be displayed on your screen if 'AUTORUN' is not activated).
- Select the right folder on the CD with Windows Explorer).
- Select the 'Velleman Kits' folder. Select the 'K8048' folder.
- Run the 'INSTALL\_K8048.EXE' program in the '\Velleman kits\K8048\' folder.
- Follow the indications on the screen until all files are installed.

## 19. Schematic diagram.

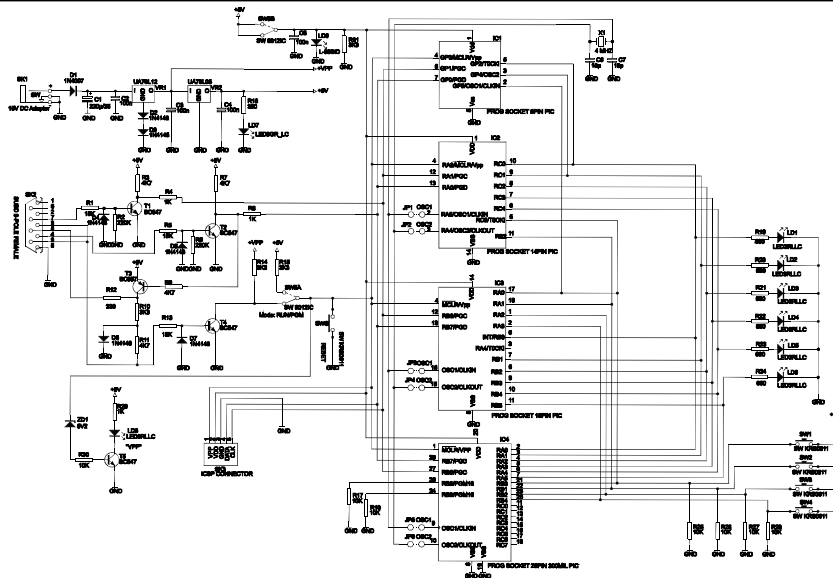

20. PCB

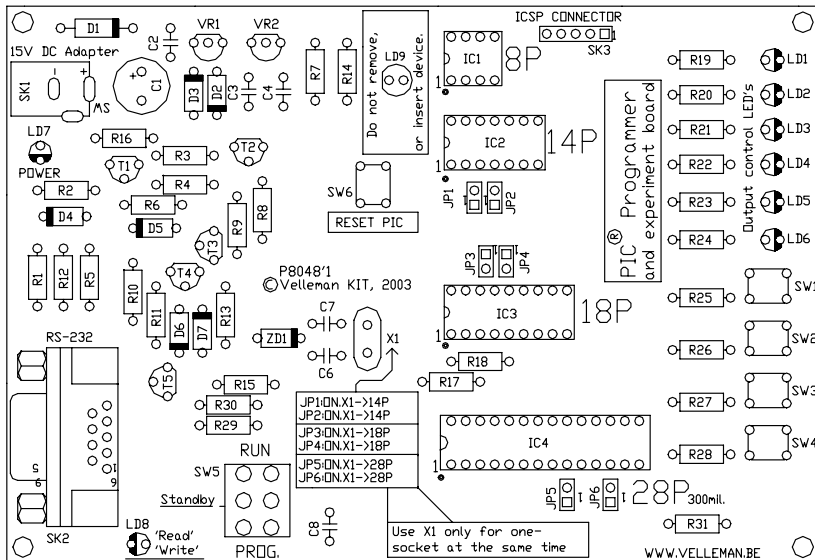



Modifications and typographical errors reserved  
© Velleman Components nv.  
H8048IP - 2004 - ED1

