Field Side Connection Module

DC 24 V

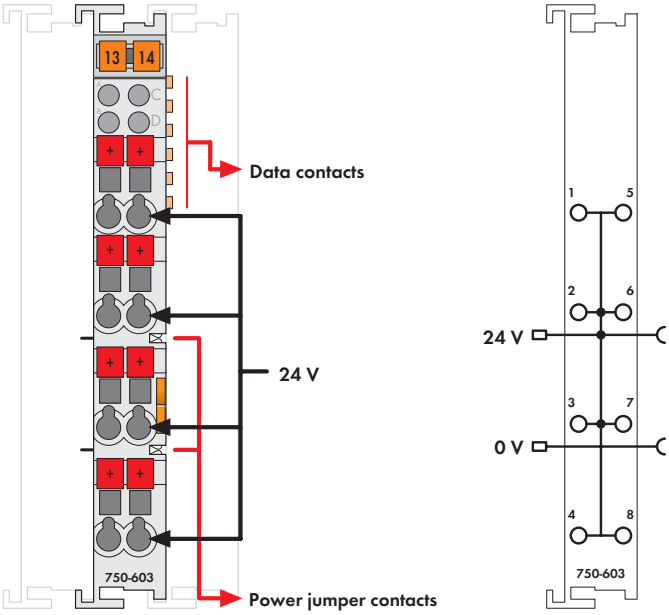

Fig. Series 750 / Technical data see page 41 / Delivery without Mini WSB marker
Series 750 / 753 marking see pages 32 ... 33 / 34 ... 35

The field side connection module provides 24 V power for the inputs of the 8-channel input module 750-430/-431,

eliminating external terminal blocks.

The 24 V supply and 0 V potential are derived from the internal power jumper contacts of an adjacent upstream I/O module. A connection of the potentials to the downstream I/O modules is made automatically via the power jumper contacts when snapping the I/O modules together. The 24 V power is available to all eight field side CAGE CLAMP® connections and the 0 V potential is passed through without being used by the module.

Description	Item no.	Pack. unit
Field Side Connection	**750-603**	1
Field Side Connection (without connector)	**753-603**	1

Accessories		Item no.	Pack. unit
	Connectors Series	**753-110**	25
	Coding elements	**753-150**	100
	Miniature WSB Quick marking system		
	plain	**248-501**	5
	with marking	see pages 224 ... 225	

Approvals

Series 750 and 753	
Conformity marking	CE

Technical Data	
Voltage via power jumper contacts (max)	DC 24 V
Current via power jumper contacts (max.)	DC 10 A
Wire connection	CAGE CLAMP®
Cross sections	0.08 mm² ... 2.5 mm² / AWG 28 ... 14
Stripped length series 750 / 753	8 ... 9 mm / 0.33 in
	9 ... 10 mm / 0.37 in
Width	12 mm
Weight	approx. 40 g
EMC CE -Immunity to interference	acc. to EN 50082-2 (1996)
EMC CE -Emission of interference	acc. to EN 50081-1 (1993)

WAGO Kontakttechnik GmbH & Co. KG
Postfach 2880 • D-32385 Minden Tel.: +49(0)571 /887-0 E-Mail: info@wago.com
Hansastr. 27 • D-32423 Minden Fax.: +49(0)571 /887-169 www.wago.com