End Module

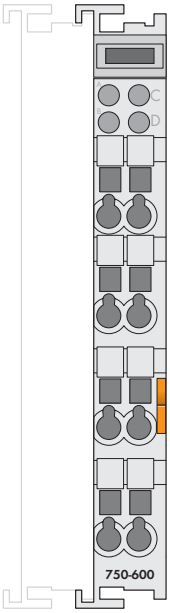

After the fieldbus node is assembled with the correct buscoupler and selected I/O modules, the end module is snapped onto the assembly.

It completes the internal data circuit and ensures correct data flow.

Description	Item no.	Pack. unit
End Module	**750-600**	10 [1]
End Module/T	**750-600/025-000**	1
(Operating temperature -20 °C ... +60 °C)		

[1] Also available individually

Accessories		Item no.	Pack. unit
Miniature WSB Quick marking system			
	plain	**248-501**	5
	with marking	see pages 224 ... 225	

Approvals

Series 750	
UL 508	
Marine applications	see pages 36 ... 39
EN 50021	II 3 GD EEx nA II T4
UL 1604	Class I Div2 ABCD T4A
Conformity marking	CE

Technical Data	
Width	12 mm
Weight	approx. 35 g
EMC CE -Immunity to interference	acc. to EN 50082-2 (1996)
EMC CE -Emission of interference	acc. to EN 50081-1 (1993)
EMC marine applications - Immunity to interference	acc. to Germanischer Lloyd (2001)
EMC marine applications - Emission of interference	acc. to Germanischer Lloyd (2001)

WAGO Kontakttechnik GmbH & Co. KG
Postfach 2880 • D-32385 Minden Tel.: +49(0)571 /887-0 E-Mail: info@wago.com
Hansastr. 27 • D-32423 Minden Fax.: +49(0)571 /887-169 www.wago.com