


**RS VERT
RS VERT 6P 12X6 Z**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

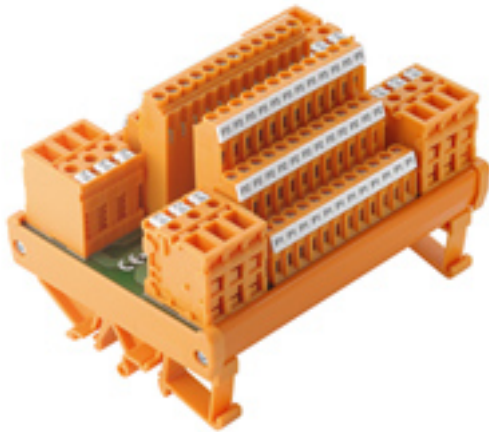

Distributor module with 6 voltage potentials
(P1,P2,P3,P4,P5,P6) in 12P1,12P2,12P3 ,12P4,12P5
and 12P6 for tension-clamp or screw connection.

General ordering data

Type	RS VERT 6P 12X6 Z
Order No.	1128130000
Version	Interface, RS VERT, 6 P, Tension clamp connection
GTIN (EAN)	4032248909667
Qty.	1 pc(s).

RS VERT RS VERT 6P 12X6 Z

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technische Daten

Dimensions and weights

Length	122 mm	Width	87 mm
Height	75 mm	Net weight	300 g

Temperatures

Operating temperature	-25...+50°C	Storage temperature	-40...+60 °C
-----------------------	-------------	---------------------	--------------

Connection data

Number of potentials	6	Distribution PCB connectors	LM3NZF 5.08mm
Supply plug-in connectors	TOP 1.5GS2/180		

Rating data

Rated voltage (text)	250 V AC	Maximum current per potential connection	20 A
Maximum current per distributor connection	15 A	Total operating current	120 A

Insulation coordination (EN50178)

According to	DIN EN 50178	Rated insulation voltage	< 300 V AC
Surge voltage category	III	Pollution severity level	2
Pulse voltage test (1,2/50µs)	4 kV	Insulation test voltage	1.2 kVAC

Connection field

Type of connection	Tension clamp connection	Clamping range, min.	0.13 mm ²
Clamping range, max.	2.5 mm ²	Solid, min. H05(07) V-U	0.2 mm ²
Solid, max. H05(07) V-U	2.5 mm ²	Flexible, min. H05(07) V-K	0.2 mm ²
Flexible, max. H05(07) V-K	1.5 mm ²	Flexible with sleeve, max.	1.5 mm ²
Flexible with sleeve, min.	0.25 mm ²	Sleeve with plastic collar, max.	1.5 mm ²
Min. wire cross-section, AWG [field]	AWG 24	Max. wire cross-section, AWG [field]	AWG 14
Stripping length	7.5 mm		

Supply connection

Type of connection	Screw connection	Clamping range, min.	0.13 mm ²
Clamping range, max.	6 mm ²	Solid, min. H05(07) V-U	0.5 mm ²
Solid, max. H05(07) V-U	6 mm ²	Flexible, min. H05(07) V-K	0.5 mm ²
Flexible, max. H05(07) V-K	4 mm ²	Flexible with sleeve, max.	4 mm ²
Flexible with sleeve, min.	0.5 mm ²	Ferrule with plastic collar, max.	4 mm ²
Wire cross-section, min. AWG	AWG 26	Wire cross-section, max. AWG	AWG 10
Tightening torque, min.	0.5 Nm	Tightening torque, max.	0.6 Nm
Stripping length	13 mm		

Classifications

eClass 6.2	27-24-22-04	eClass 7.1	27-24-22-04
------------	-------------	------------	-------------

Datenblatt

RS VERT
RS VERT 6P 12X6 Z

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technische Daten

Approvals

Approvals



ROHS

Conform

**RS VERT
RS VERT 6P 12X6 Z**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Zeichnungen

