


## Terminal markers DEK 6,5 FWZ 11-20

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

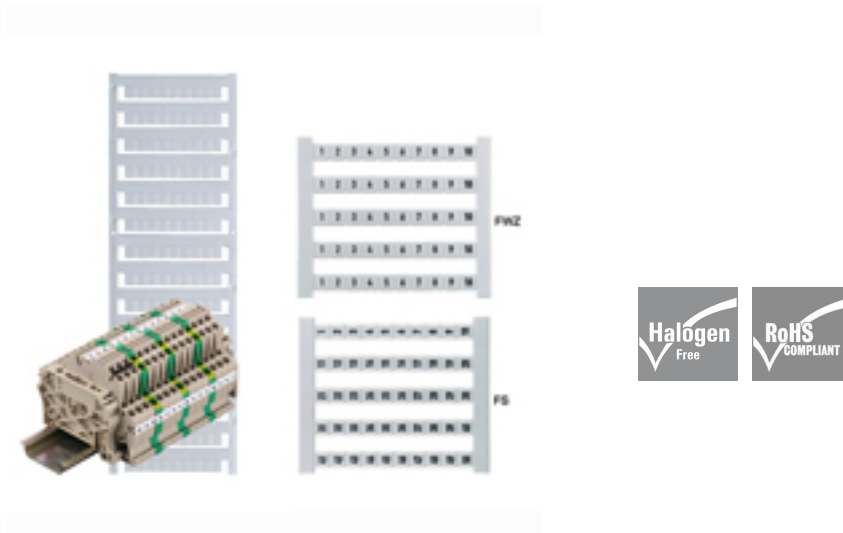

The dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a large range of ready-printed markers. Strips for fast installation in one work step. The printing is easy to read, rich in contrast, and is available in five widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Connector markers, suitable for all Weidmüller cable connectors
- Available as blank cards, MultiCard or as cards with standard printing

### General ordering data

|            |                                                                 |
|------------|-----------------------------------------------------------------|
| Type       | DEK 6,5 FWZ 11-20                                               |
| Order No.  | <a href="#">0519060011</a>                                      |
| Version    | Terminal markers, Card, 5 x 6.5 mm, Polyamide 66, Colour: White |
| GTIN (EAN) | 4008190051747                                                   |
| Qty.       | 500 pc(s).                                                      |

## Terminal markers DEK 6,5 FWZ 11-20

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

## Technische Daten

### Dimensions and weights

|            |        |       |        |
|------------|--------|-------|--------|
| Length     | 5 mm   | Width | 6.5 mm |
| Net weight | 0.05 g |       |        |

### General data

|                                   |              |                                              |         |
|-----------------------------------|--------------|----------------------------------------------|---------|
| Colour                            | White        | Colour of printing                           | Black   |
| Material                          | Polyamide 66 | Material colour according to resistance code | 9       |
| Operating temperature range, max. | 100 °C       | Operating temperature range, min.            | -40 °C  |
| Orientation of print              | horizontal   | Printed characters                           | Numbers |
| Printing method                   | MC Laser     | UL 94 flammability rating                    | V-2     |

### Connector markers

|                 |        |
|-----------------|--------|
| Pitch in mm (P) | 6.5 mm |
|-----------------|--------|

### Classifications

|            |             |            |             |
|------------|-------------|------------|-------------|
| ETIM 3.0   | EC000761    | UNSPSC     | 30-21-18-07 |
| eClass 5.1 | 27-14-11-37 | eClass 6.2 | 27-14-11-37 |
| eClass 7.1 | 27-14-11-37 |            |             |

### Approvals

Approvals



|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|