


OMNIMATE Power - series LX LX 15.00/01/90 4.5SN BK BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

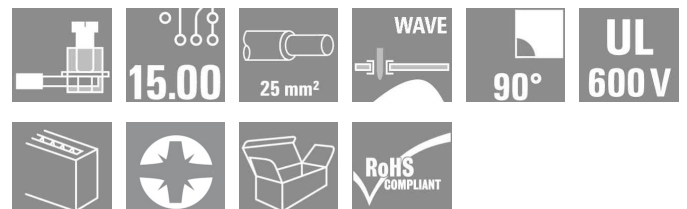

High-performance PCB terminal with proven clamping yoke connection at 15.00 mm pitch, conductor outlet direction in 90° design. Version and test point

- 1.50 - 25 mm² (IEC) / 16 - 4 AWG (UL)
- 1000 V (IEC) / 600 V (UL)
- 101 A (IEC) / 85 A (UL)

General ordering data

Type	LX 15.00/01/90 4.5SN BK BX
Order No.	1226460000
Version	PCB terminal, 15.00 mm, No. of poles: 1, 90°, Solder pin length (l): 4.5 mm, tinned, Black, Clamping yoke connection, Clamping range, rated connection, max.: 25 mm ² , Box
GTIN (EAN)	4050118011098
Qty.	20 pc(s).
Product data	IEC: 1000 V / 101 A / 1.5 - 25 mm ² UL: 600 V / 85 A / AWG 16 - AWG 4
Packaging	Box

Erstellungs-Datum December 17, 2013 1:25:37 PM CET

**OMNIMATE Power - series LX
LX 15.00/01/90 4.5SN BK BX**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technische Daten**Dimensions and weights**

Net weight	17.5 g
------------	--------

System characteristics

Product family	OMNIMATE Power - series LX	Wire connection method	Clamping yoke connection
Mounting onto the PCB	Solder connection	Conductor outlet direction	90°
Pitch in mm (P)	15 mm	Pitch in inches (P)	0.591 inch
No. of poles	1	Fitted by customer	No
Max. adjacent poles per row	10	Solder pin length (l)	4.5 mm
Solder eyelet hole diameter (D)	1.6 mm	Solder eyelet hole diameter tolerance (D)+	0,1 mm
Number of solder pins per pole	2	Screwdriver blade	1.0 x 5.5
Screwdriver blade standard	DIN 5264	Tightening torque, min.	2.4 Nm
Tightening torque, max.	4 Nm	Clamping screw	M 5
Stripping length	16 mm	L1 in mm	0 mm
L1 in inches	0 inch	Touch-safe protection acc. to DIN VDE 0470	IP 10
Touch-safe protection acc. to DIN VDE 57 106	Safe from finger touch		

Material data

Insulating material	Wemid (PA)	Colour	Black
UL 94 flammability rating	V-0	CTI	≥ 600
Temperature of glow-wire test	960 °C	Duration of glow-wire test	30 s
Contact material	E-Cu	Contact surface	tinned
Contact base material	E-Cu		

Connectable conductors

Clamping range, rated connection, min.	1.31 mm ²	Clamping range, rated connection, max.	25 mm ²
Wire connection cross section AWG, min.	AWG 16	Wire connection cross section AWG, max.	AWG 4
Solid, min. H05(07) V-U	1.5 mm ²	Solid, max. H05(07) V-U	16 mm ²
Stranded, max. H07V-R	25 mm ²	Stranded, min. H07V-R	6 mm ²
Stranded, min. H07V-R	6 mm ²	Flexible, min. H05(07) V-K	1.5 mm ²
Flexible, max. H05(07) V-K	25 mm ²	w. wire end ferrule, DIN 46228 pt 1, min	1.5 mm ²
w. wire end ferrule, DIN 46228 pt 1, max.	16 mm ²	w. plastic collar ferrule, DIN 46228 pt 4, min.	1.5 mm ²
w. plastic collar ferrule, DIN 46228 pt 4, max.	16 mm ²	Plug gauge acc. to EN 60999 a x b; Ø	6.9 mm x 6.9 mm

DIN IEC rating data

Rated current, min. no. of poles (Tu=20°C)	101 A	Rated current, max. no. of poles (Tu=20°C)	101 A
Rated current, number of poles (Tu=40°C), min	101 A	Rated current, number of poles (Tu=40°C), max.	101 A
Rated voltage for surge voltage class pollution degree II/2	1,000 V	Rated voltage for surge voltage class pollution degree III/2	1,000 V
Rated voltage for surge voltage class pollution degree III/3	1,000 V	Rated impulse voltage for surge voltage class pollution degree II/2	6 kV
Rated impulse voltage for surge voltage class pollution degree III/2	8 kV	Rated impulse voltage for surge voltage class contamination degree III/3	8 kV
Short-time withstand current resistance	3 x 1s mit 1000 A		

OMNIMATE Power - series LX
LX 15.00/01/90 4.5SN BK BX

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technische Daten
CSA rating data

Rated voltage (Use group B)	600 V	Rated current (use group B)	85 A
Rated voltage (Use group C)	600 V	Rated current (use group C)	85 A
Rated voltage (use group D)	600 V	Rated current (use group D)	5 A
Wire cross-section, AWG, min.	AWG 16	Wire cross-section, AWG, max.	AWG 4

UL 1059 rating data

Rated voltage (use group B)	600 V	Rated current (use group B)	85 A
Rated voltage (use group C)	600 V	Rated current (use group C)	85 A
Rated voltage (use group D)	600 V	Rated current (use group D)	5 A
Wire cross-section, AWG, min.	AWG 16	Wire cross-section, AWG, max.	AWG 4

Classifications

ETIM 3.0	EC001284	eClass 6.2	27-26-11-01
eClass 7.1	27-44-04-01		

Notes

Notes	• Additional colours on request • Rated current related to rated cross-section & min. No. of poles. • Wire end ferrule without plastic collar to DIN 46228/1 • Wire end ferrule with plastic collar to DIN 46228/4 • P on drawing = pitch • Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.
-------	--

Approvals

Approvals




ROHS

Conform


OMNIMATE Power - series LX LX 15.00/01/90 4.5SN BK BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Zeichnungen



LX 15.00/./90

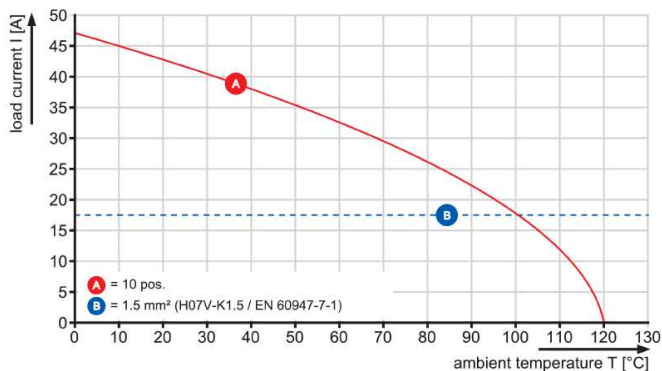

LX 15.00/./90

