


**SAK Series
DK 4Q/TC TYP K**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

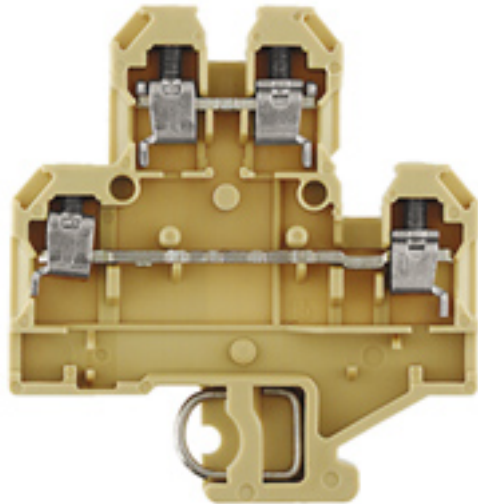

Weidmüller thermocouple terminals of the SAK Series are specially designed to transmit the smallest voltages in temperature measuring circuits. Special current bars ensure that no erroneous signals can be generated in the terminal in the case of temperature differences between the plus and minus paths. Such highly precise measurements are required in aircraft engine test rigs, complicated chemical processes, controls, etc.

- The material of the current bar is identical to that of the thermocouple and equalising lines.
- Clear labelling of the thermocouple
- 2-pole blocks per thermocouple
- 10 mm mounting width

General ordering data

Type	DK 4Q/TC TYP K
Order No.	1338260000
GTIN (EAN)	4008190109561
Qty.	100 pc(s).

SAK Series DK 4Q/TC TYP K

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technische Daten

Dimensions and weights

Length	54 mm	Width	6 mm
Height	59.5 mm	Height of lowest version	59.5 mm
Net weight	13.3 g		

Temperatures

Operating temperature		Storage temperature	
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	100 °C

Additional technical data

Explosion-tested version	No	Installation advice	Direct mounting
Number of similar terminals	1	Open sides	right
Type of mounting	Snap-on	Version	Screw connection, Thermocouple, One end without connector

Clampable wires (additional connection)

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, min.	0.5 mm ²	Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max.	2.5 mm ²
---	---------------------	---	---------------------

Clampable wires (rated connection)

Type of connection	Screw connection	Stripping length	9 mm
Blade size	0.6 x 3.5 mm	Connection direction	on side
Number of connections	4	Clamping range, rated connection, max.	4 mm ²
Clamping screw	M 3	Tightening torque, min.	0.5 Nm
Tightening torque, max.	1 Nm	Torque level with DMS electric screwdriver	2
Gauge to IEC 60947-1	A3	Wire connection cross section, solid core, max. rated connection	0.5 mm ²
Wire connection cross section, solid core max. rated connection	4 mm ²	Wire connection cross section, stranded, rated connection, min.	1.5 mm ²
Wire connection cross section, stranded, rated connection, max.	4 mm ²	Wire connection cross section, finely stranded, max.	4 mm ²
Wire connection cross-section, finely stranded, min.	0.5 mm ²	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	0.5 mm ²
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	2.5 mm ²	Cross-section for connected conductor, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, min.	0.5 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, max.	2.5 mm ²		

Rated data

Rated cross-section	4 mm ²	Standards	IEC 60584, IEC 60947-1
---------------------	-------------------	-----------	------------------------

Material data

Material	PA 66	Colour	Beige
UL 94 flammability rating	V-2		

Erstellungs-Datum December 20, 2013 8:35:07 AM CET

SAK Series DK 4Q/TC TYP K

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technische Daten

System specifications

Product family	SAK Series	Type of connection	Screw connection
Connection direction	on side	Number of levels	2
Number of connections	4	No. of clamping points per level	2
Levels cross-connected internally	No	Mounting rail	TS 32
End cover plate required	Yes		

Classifications

ETIM 3.0	EC000904	UNSPSC	30-21-18-11
eClass 5.1	27-14-11-31	eClass 6.2	27-14-11-90
eClass 7.1	27-14-11-20		

Approvals

Approvals



ROHS

Conform