

Customer: ALGE GERMAN DISTRIBUTER

No. IX-2004-2926

Date: Jul. 21, 2004

Attention: _____

Your ref. No: _____

Your Part. No: ALBS 402149

SPECIFICATIONS

ALPS';

MODEL RK09L1220
(10k B X2)

Spec. No. : _____

Sample No. : F1689823M

RECEIPT STATUS
 RECEIVED
 By Date _____
 Signature _____
 Name _____
 Title _____

ALPS ELECTRIC CO., LTD.

HEAD OFFICE
 1-7, YUKIGAYA-OHTSUKA-CHO,
 OHTA-KU, TOKYO 145-8501 JAPAN

DSG'D M. Sato

APP'D S. Sato

Sales _____

SPECIFICATIONS

1. THIS SPECIFICATIONS APPLY TO RK09L1220 POTENTIOMETER.

2. CONTENTS OF THIS SPECIFICATIONS.

F1689823M
K092G000C

3. MARKING

· MARKING ON ALL UNITS
DATE CODE, RESIST. VALUE, TAPER

4. REMARKS

· FURNISH PACKAGE
NUT: 1, WASHER: 1

· CAUTION

Regardless of the suggested applications of these products being introduced in the specifications, when using them for equipment and devices requiring a high degree of safety, respective manufacturers will please preserve safety of the planned equipment and devices by providing necessary protective circuits and redundancy circuits and reconfirm if safety is being duly preserved.

Products being introduced in the specifications have been designed and manufactured for applications to ordinary electronic equipment and devices such as the AV equipment, electric home appliances, office machines and communications equipment. Consequently, when employing these products for applications requiring a high degree of safety and reliability such as the medical equipment, aviation and aircraft equipment, space equipment and burglar alarm equipment, the using manufacturers will please thoroughly study the proprieties of these products for the planned applications.


Although we are exerting our best efforts to maintain the quality of these products, we cannot guarantee that they will never cause short circuiting and open circuitry. Therefore, when designing an equipment or device with which the priority is given to the safety, you will please carefully study the influences to the whole equipment of a single function failure of Potentiometers and Encoders in advance to make out a fail-safe design providing.

SPECIFICATIONS

ELECTRICAL

1. Total resistance : $10k \Omega \pm 20\%$
2. Rated power : $0.05 W$
3. Rated voltage :
 The rated voltage shall be the voltage of D.C. or A.C. (commercial frequency, effective value) corresponding to the rated power (dissipation), and be obtained from the following formula. When the obtained rated voltage exceeds the maximum working voltage given in the following, however, the maximum working voltage of the following shall be the rated voltage.

$$E = \sqrt{P \cdot R} \text{ (V)}$$
 Where
 E : Rated voltage (V)
 P : Rated power (dissipation) (W)
 R : Nominal total resistance (Ω)
 Maximum working voltage : $50 V \text{ A.C. } , 10 V \text{ D.C.}$
4. Resistance taper : B
5. Residual resistance between terminals 1&2, 2&3 : $20\Omega \text{ max.}$
6. Sliding noise : Less than $100mV$. (Measured by JIS C 6443)
7. Insulation resistance : More than $100 M\Omega$ at $250V \text{ D.C.}$
8. Withstand voltage: $300V \text{ A.C.}$ for 1 minute.
9. Gang error : $3 \text{ dB max. at } 150^\circ$



MECHANICAL

1. Total rotational angle : $300^\circ \pm 5^\circ$
 2. Rotational torque : $2 \sim 25mN \cdot m$ (Rotational speed $60^\circ/\text{sec.}$)
 3. Stopper strength : No damage with an application of $0.5N \cdot m$.
 4. Resistance to soldering heat : Please refer to the attached
 5. Bushing nut tightening strength : Tightening torque to be no greater than $1N \cdot m$.
 *Pay attention otherwise the strength may not be assured.
-
6. Push/pull strength :
 After installing the potentiometer, no damages with an application of push or pull force $80N$ for 10 seconds.
 7. Shaft wobble :
 The resistor shall be mounted by soldering the mounting legs on the panel and a side thrust of $50mN \cdot m$ at the end of the shaft shall be applied, then the total play of the shaft shall not exceed $0.6 \times L / 20 \text{ mm-p.}$
 (L is the length between mounting surface and measuring point.)

ENDURANCE

1. Rotational life : $15,000 \text{ cycles min.}$


NOTE

1. Operating temperature range : $-10 \sim +70^\circ C$
2. Storage temperature range : $-20 \sim +80^\circ C$
3. The items except above mentioned items shall meet or exceed JIS C 6443.
4. The use for HomeAudio.
5. This type is protected against sulfides.

ALPS ELECTRIC CO., LTD.					
					APPD. CHKD. DSGD. TITLE <i>Aug. 19, '93</i> <i>Aug. 19, '93</i> <i>Aug. 19, '93</i> F 1689823M
					DOCUMENT NO.
					L X
SYMB	DATE	APPD	CHKD	DSGD	





ALPS ELECTRIC CO., LTD
1-7 YUKIGAYA OTSUKA-CHO OTA-KU TOKYO JAPAN

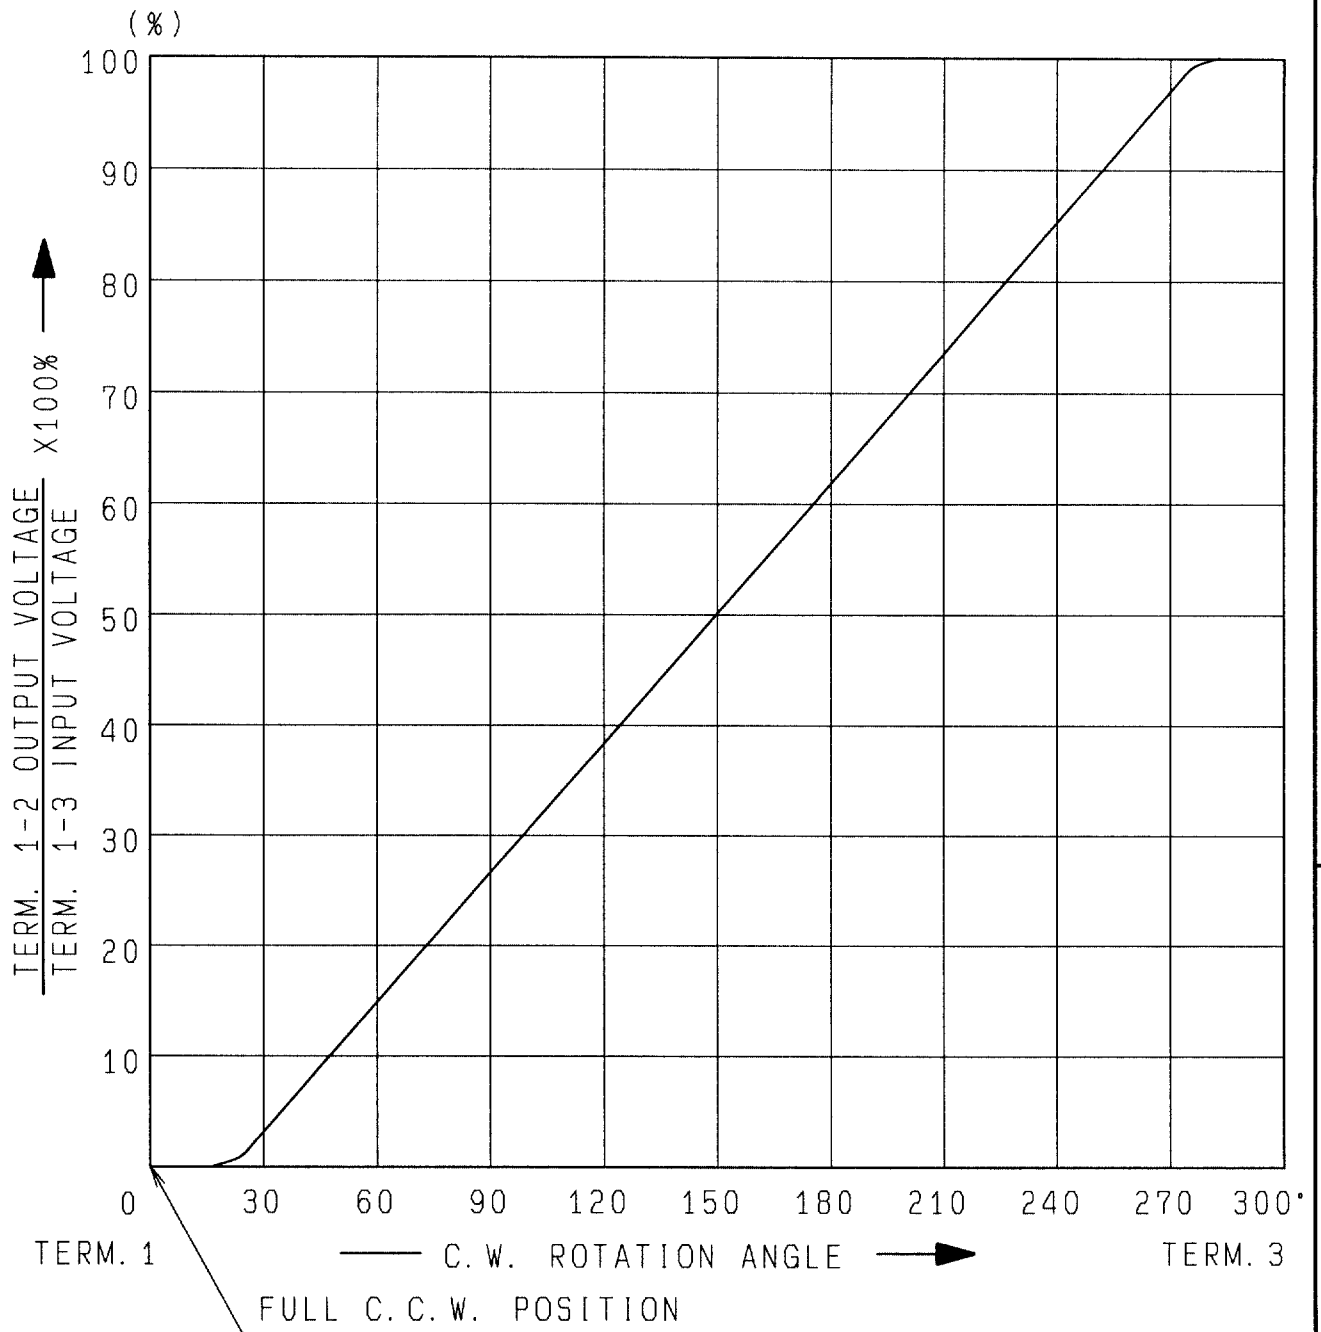



AT 150° C.W. SHAFT ROTATION FROM FULL C.C.W. POSITION VOLTAGE PERCENT SHALL FALL WITHIN THE LIMITS OF 40~60 PERCENT.

					APPD.	CHKD.	DSGD.	NAME
					Sep. 07. '93	Sep. 07. '93	Sep. 07. '93	RESISTANCE TAPER (B)
					K. Magami	K. Sasaki	K. Suzuki	DOCUMENT NO.
SYMB	DATE	APPD	CHKD	DSGD				F1689823M

LX

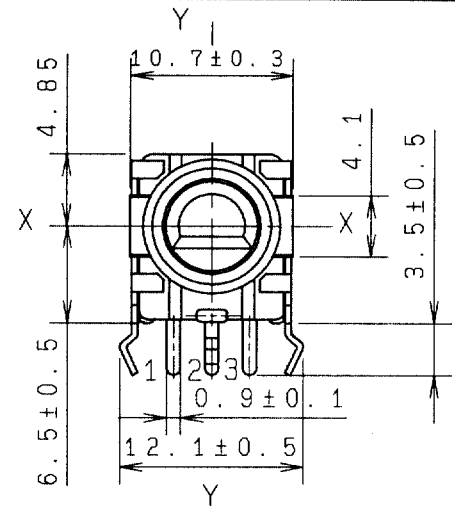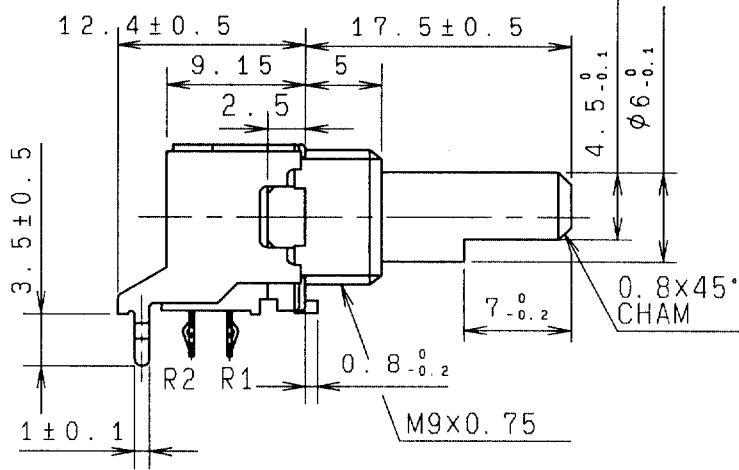


端子取付穴寸法図 (挿入側より見た図)
 (許容差±0.1)
 MOUNTING HOLE DETAIL
 (TOLERANCE±0.1)
 VIEWED FROM MOUNTING SIDE

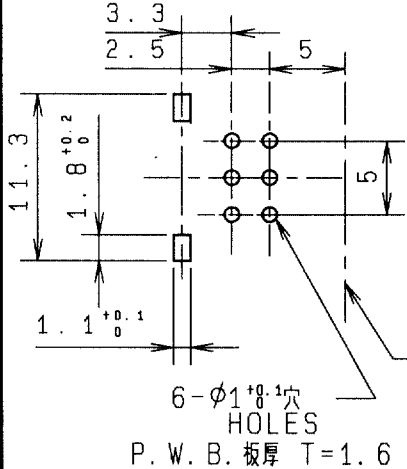


軸受取付面
 BUSHING
 MOUNTING
 SURFACE
 シャーシ止め 詳細図
 LOCATING LUG
 DETAIL

軸はセンター位置を示す
 SHAFT SHOWN IN
 CENTER POSITION



軸は、反時計方向に
 回し切った状態を示す
 SHAFT SHOWN
 IN FULL C.C.W
 POSITION.



指定なき部分の許容差 TOLERANCES UNLESS OTHERWISE SPEC	
$L \leq 10$	±0.3
$10 < L < 100$	±0.5
$100 \leq L$	±0.8
角度 ANGULAR DIMENSION	±5°

PART NO.	NAME	MATERIAL NAME / CODE	FINISH
ALPS ELECTRIC CO., LTD.			
		DSGN. 1-設計1課 Y. Saitoh 93-10-01	SCALE 2/1
		CHKD. SEC M. Satoh 93-10-01	NO. F1689823M
		APPD. SEC S. Aizawa 93-10-01	TITLE 9形1軸2連VR組立図 FIGURE
SYMB	DATE	APPD	DOCUMENT NO. G01
		CHKD	DSGD
			K092G000C