

INDEX

ALUMINUM ELECTROLYTIC CAPACITORS

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

19	ST [For Super Miniature]-5mm L	1,000hrs. at 85°C
21	S7 [For Super Miniature]-7mm L	1,000hrs. at 85°C
23	S5 [For Super Miniature]-5mm L	1,000hrs. at 105°C
25	SS [For Super Miniature]-7mm L	1,000hrs. at 105°C
27	SK [For General]	2,000hrs. at 85°C
30	SE-K [For General]	1,000hrs. at 105°C
33	SH [For General]	2,000hrs. at 105°C
36	SG [For Electronic Ballast]	5,000hrs. at 105°C
39	SA [For High Temperature and Load Life]	8,000hrs. at 105°C
43	SP [High Ripple and Long Life]	10,000hrs. at 105°C
46	SB [For Low Leakage Current]	1,000hrs. at 105°C
49	SR [For Horizontal Deflection]	1,000hrs. at 85°C
51	SN [For Non Polar]	1,000hrs. at 105°C
53	SC [For Low Impedance and Low E.S.R Suitable for Output of Mother Board]	2,000~3,000hrs. at 105°C
56	SM [For very Low Impedance and very Low E.S.R Suitable for Output of Mother Board]	2,000~3,000hrs. at 105°C
59	SX [For Low Impedance & Low E.S.R]	2,000~5,000hrs. at 105°C
63	SY [For Low Impedance and Low E.S.R Suitable for Output of Mother Board]	3,000~6,000hrs. at 105°C
66	SZ [For Ultra Low ESR]	2,000hrs. at 105°C
68	SQ [High Temperature for +125°C]	1,000hrs. at 125°C
70	SV [For adapter and power supply applications Series]	2,000hrs. at 105°C
72	SF [For Photo Flash Application]	5,000hrs. at 55°C

LARGE CAN ALUMINUM ELECTROLYTIC CAPACITORS

74	LH Series	2,000 hrs. at 85°C
79	LG Series	2,000 hrs. at 105°C
84	LV Series	3,000 hrs. at 105°C

SURFACE MOUNT ALUMINUM ELECTROLYTIC CAPACITORS

88	CA Series	2,000 hrs. at 85°C
90	CB Series	1,000 hrs. at 105°C



1-1 Precautions in Using Aluminum Electrolytic Capacitors

Please note the following recommendations when use capacitors:

1. Electrolytic capacitors for DC applications require polarization .

Confirm the polarity before use . The circuit life may be shortened or the capacitor may be damaged if insert in reversed polarity . For use on circuits whose polarity is occasionally reversed , or whose polarity is unknown , use non-polar capacitors . Also note that the electrolytic capacitors cannot be used for AC applications .

2. Do not apply a voltage exceeding the capacitor's voltage rating.

If a voltage exceeding the capacitor's voltage rating is applied , the capacitor may be damaged by increased leakage current . When using the capacitor with AC voltage do not exceed the rated voltage .

3. Do not allow excessive ripple current passing.

Use the electrolytic capacitor at current value within the permissible ripple range . If the ripple exceeds the specified value , request capacitors for high ripple current applications .

4. Ascertain the operation temperature range .

Use the electrolytic capacitors according to the specified operation temperature range . Use at room temperature will ensure a longer life .

5. The electrolytic capacitor is not suitable for circuits which are charged and discharged repeatedly .

If used in circuits which are charged and discharged repeatedly , the capacitance value may drop or the capacitor may be damaged .

Please consult our engineering department for assistance in these applications .

6. When capacitors have been left unused for long time , use them only after due voltage treatments . Long storage of capacitors tends to rise their leakage current levels . In such cases , be sure to provide the necessary voltage treatment before use .

7. Be careful of temperature and time when soldering .

When soldering a printed circuit board with various components , care must be taken that the soldering temperature is not too high and that the dipping time is not too long .

Otherwise , there will be adverse effect on the electrical characteristics and insulation sleeve of electrolytic capacitors . In the case of small -size electrolytic capacitors , nothing abnormal will be occurred if dipping is performed at less than 260°C for less than 10 seconds .


8. Cleaning circuit boards after soldering .

Halogenated hydrocarbon cleaning solvents are not recommended for use in cleaning capacitors supplied with exposed end seals . Where cleaning with a halogenated solvent is desired , capacitors should be ordered with an Epoxy-coated end seal .

9. Do not apply excessive force to the lead wires or terminals .

If excessive force is applied to the lead wires and terminals , they may be broken or their connections on the internal elements may be affected . (For strength of terminals , please refer to JIS C5102 and C5141 .)

10. Keep the following clearance between the vent of the capacitor and the case of the appliance . Do not block the operation of the vent , unless otherwise described on the catalogues or product specifications . The narrower clearance may adversely affect the vent operation and result in an explosion of the capacitor .

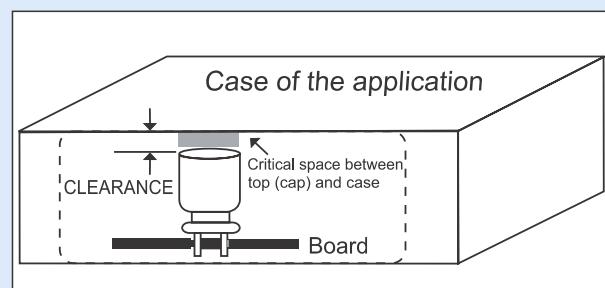

Case diameter	Clearance
ø 6.3 to ø 16 mm	2 mm minimum
ø 18 to ø 35 mm	3 mm minimum
ø 40 mm & up	5 mm minimum

Fig.I-1

Attention

- The description in this catalogue is subject to change without prior notice for product improvement . Therefore , please confirm the specification before ordering products .
- The general characteristics , reliability data , etc ., described in this catalogue should not be construed as guaranteed values , they are merely standard values .
- Before using the products , please read the notes in this catalogue carefully for proper use .



1-2 Technical Concepts

1. The material and structure of Electrolytic Capacitors

Electrolytic Capacitor is a simple module . It simply contains an insulator between relative conductors in an electrode. The major internal raw material contains an element constructed by an separator paper wrap around the anode foil and cathode foil , which is then impregnated with the electrolyte , inserted into an aluminum case and sealed.

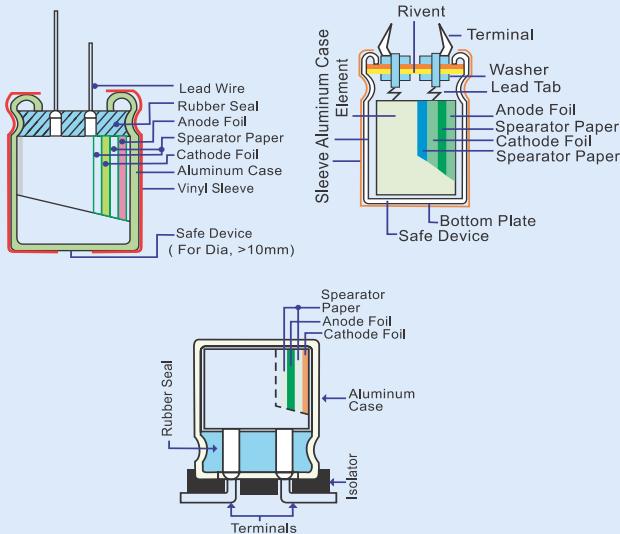


Fig.1-2

2. Production Processes

1. Etching : The process to increase surface area of aluminum foil by using chemical erosion or chemical corrosion method is called Etching . Normally chemical corrosion method uses the ripple current of electrolyte , combination of the liquid and temperature to determine the size, shape , and quantity of the dense network of microscopic channels on the aluminum foil surface .
2. Forming : The production process of the anode aluminum foil of electrolytic capacitors is by anodic oxidation of the etched aluminum foil . The production of the cathode aluminum foil sometimes involves oxidation in special purposes . This anodic oxidation process is called Forming . Boric acid or organic acid is used for high voltage forming and phosphoric acid or ammonium adipate is used for low voltage forming in order to obtain stable natural oxide layer of Al_2O_3 .
3. Slitting : The cutting of the aluminum foil and separator paper according to the required length .
4. Winding : The stitching or cold welding of cut anode and cathode foils and tab terminal , and wrap the electrolytic paper in between the anode and cathode , then fix the end with glue or sticky tape , and attached leads is called the capacitor "element".
5. Impregnation : The process of eliminating the water from the elements by pressurizes or vacuum in order to soak the element with the electrolyte is called Impregnation . The elements fully filled with electrolyte is then centrifuged to remove excess electrolyte .
6. Assembly : The elements seal with rubber to stop the leakage of electrolyte then slip into a sleeve to form the final product .
7. Aging : The purpose of Aging is to repair the oxide film damage by recharging and electrolyte .

1-3 The Function of Electrolytic Capacitors

The electrolytic capacitors could be widely used in appliance (ie. TV , radio , audio equipment , watching machine and air conditioner.....etc .), computer equipment (mother board, image device & the peripherals such as the printer , drawing device, scanner etc) , communication equipment , estate equipment , measure instrument and also the industrial instrument , air plane , firebomb , satellite... etc. as a piloting equipment.

*According to the inflict electric wave & using purpose , it basically with some classified purposes as below :

1. DC Voltage :

- a. For Momentary High Voltage : For using to the impulse generator such as the shock wave resistance test of the heavy electric machine .
- b. For High Electric Current : For using to the welding machine , X- Ray facility , copy machine and discharge processing device .
- c. For DC High Voltage : The electrolytic capacitor and rectifier composing , a special DC high voltage been happened after charged , for using to the power of electronic microscope and accelerator .
- d. For Integration & Memory : For either memory circuit or compare circuit inside the calculator .

2. The DC voltage that with alternate ingredient :

- a. For Wave Filter : Combination with the chip resistor & inductor as a internet , to be past by DC current or some frequency to closure or decline some other frequency .
- b. For Bypass : A parallel track that outside from the circuit element , the IC (integrated circuit) has been rapidly developing in this years and thus a miniaturization or chip of electrolytic capacitors for bypass was conducted .
- c. For Coupling : Combination of the electrolytic capacitor , chip resistor and inductor and thus coupling together .
- d. For Arising of Toothing Wave : Composing of RC charge/discharge circuit through the electrolytic capacitor as well as the resistor and a toothed wave to be created by the RC charge/discharge circuit .
- e. For Reverse (Change) of Circuit : The equipment for change the AC voltage to DC voltage .

3. For AC voltage :

- a. For Power Improving : Connect the end loading of layout transporting & electrolytic capacitor for power improving .
- b. For Wave Filter : Prevention of external interference in SCR circuit , use the LC wave filter circuit to inhibit or erase the interference .
- c. For Phase Across : Phase change of the inductive electromotor(motor) with single phase .



1-4 Basic Electrical Characteristics

1. Capacitance (E.S.C.)



C : Capacitance(F)
R : Equivalent series resistance (Ω)
L : Equivalent aeries inductance(H)

Fig.1-3 Simplified equivalent circuit diagram of an electrolytic capacitor

The capacitive component of the equivalent series circuit (equivalent series capacitance ESC) is determined by applying an alternate voltage of 0.5V at a frequency of 120 Hz .

Temperature dependence of the capacitance

The capacitance of an electrolytic capacitor depends on the temperature : with decreasing temperature , the viscosity of the electrolyte increases reducing its conductivity . The capacitance will decrease if the temperature decreases . Furthermore temperature drifts cause armature dilatation and therefore capacitance changes (up to 20% , depending on the series considered, from 0 to 80°C) . This phenomenon is more evident for electrolytic capacitors than for other types .

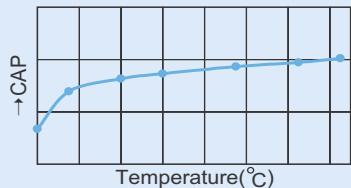


Fig 1-4 Capacitance change vs. temperature

Frequency dependence of the capacitance

The effective capacitance value is derived from the impedance curve , as long as the impedance is still in the range where the capacitance component is dominant .

$$C = \frac{1}{2\pi f Z}$$

C = Capacitance(F)
f = Frequency(Hz)
Z = Impedance(Ω)


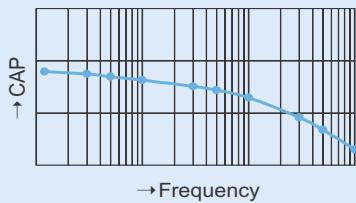


Fig 1-5 Capacitance change vs. frequency

2. Dissipation factor (tan δ)

The dissipation factor is the ratio between the active and the reactive power for a sinusoidal waveform voltage . It can be thought as a measurement of the gap between an actual and an ideal capacitor .



$$\text{D.F.} = \tan\delta \times 100 (\%) = \omega CR \times 100 (\%) = 2\pi f CR \times 100 (\%)$$

where: R = Equivalent Series Resistance
C = Equivalent Series Capacitance
 $\omega = 2\pi f$

The tan δ is measured with the same set up as for the series capacitance ESC .

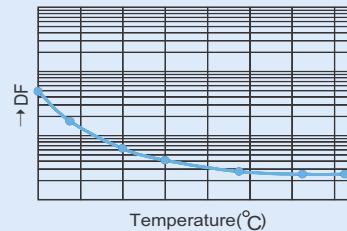


Fig 1-7 Dissipation factor vs. temperature

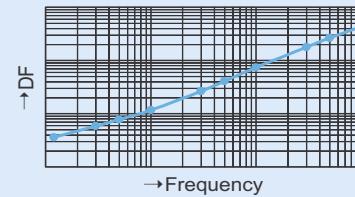


Fig 1-8 Dissipation factor vs. frequency

3. Equivalent series resistance (E.S.R.)

The equivalent series resistance is the resistive component of the equivalent series circuit . The ESR value depends on frequency and temperature and is related to the tan δ by the following equation :

$$\text{ESR} = \frac{\tan\delta}{2\pi f \text{ESC}} \quad \begin{aligned} \text{ESR} &= \text{Equivalent Series Resistance } (\Omega) \\ \tan\delta &= \text{Dissipation Factor} \\ \text{ESC} &= \text{Equivalent Series Capacitance } (\text{F}) \\ f &= \text{Frequency } (\text{Hz}) \end{aligned}$$

The tolerance limits of the rated capacitance must be taken into account when calculating this value .

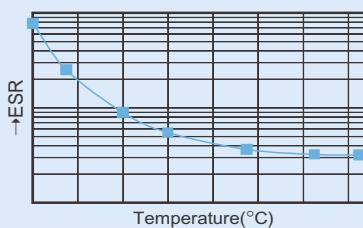


Fig 1-9 ESR change vs. temperature

The resistance of the electrolyte decreases strongly with increasing temperature.

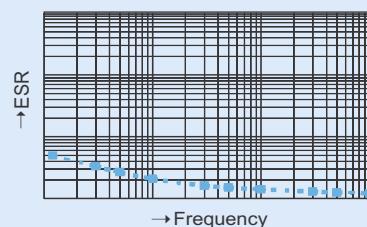


Fig 1-10 ESR change vs. frequency



4. Impedance (Z)

The impedance of an electrolytic capacitor results from here below circuit formed by the following individual equivalent series components :

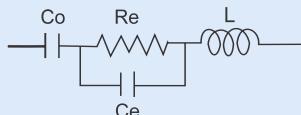


Fig 1-11

Co = Aluminum oxide capacitance (surface and thickness of the dielectric).
 Re = Resistance of electrolyte and paper mixture (other resistances not depending on the frequency are not considered : tabs , plates ,and so on).
 Ce = Electrolyte soaked paper capacitance.
 L = Inductive reactance of the capacitor winding and terminals.

The impedance of an electrolytic capacitor is not a constant quantity that retains its value under all the conditions : it changes depending on the frequency and the temperature .

The impedance as a function of frequency (sinusoidal waveform) for a certain temperature can be represented as follows :

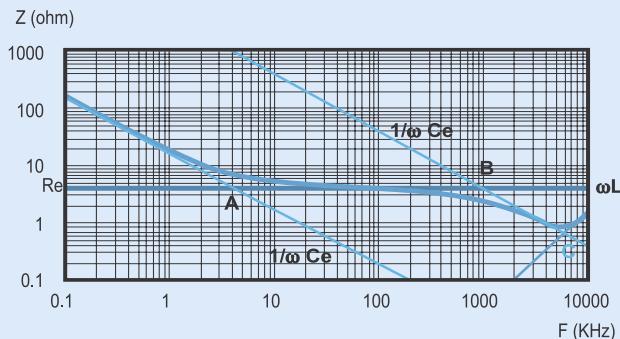


Fig 1-12

- Capacitive reactance predominates at low frequencies
 - With increasing frequency , the Capacitive reactance $X_C=1/\omega$ decreases until it reaches the order of magnitude of the electrolyte resistance R_e (A)
 - At even higher frequencies , the resistance of the electrolyte predominates : $Z= R_e$ (A - B)
 - When the capacitor's resonance frequency is reached (ω_0) , capacitive and cancel each other $1/\omega$ Inductive reactance mutually cancel each other $1/\omega C_e = \omega L$, $\omega_0 = \sqrt{1/LC_e}$
 - Above this frequency , the inductive reactance of the winding and its terminals $(XL=Z=\omega L)$ becomes effective and leads to an increase in impedance .
- Generally speaking it can be estimated that $C_e \approx 0.01 C_o$.

The impedance as a function of frequency (sinusoidal waveform) for different temperature values can be represented as follows (typical values) :

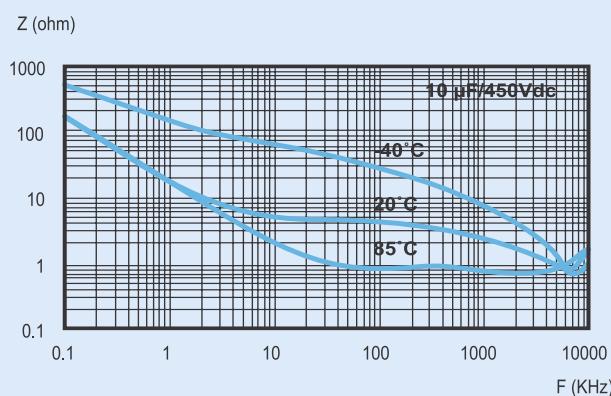


Fig 1-13

R_e is the most temperature dependant component of electrolytic capacitor equivalent circuit . The electrolyte resistivity will decrease if the temperature rises . In order to obtain a low impedance value all over the temperature range , R_e must be as little as possible , but too low R_e values means a very aggressive electrolyte and then a shorter life of the electrolytic capacitor at the high temperatures . A compromise must be reached .

5. Leakage current (L.C.)

Due to the aluminum oxide layer that serves as adielectric , a small current will continueto flow even after a DC voltage has been applied for long periods . This current is called leakage current . A high leakagecurrent flows after applying a voltage to the capacitor and then decreases in few minutes (e.g. after a prolonged storage without any applied voltage) . In the course of the continuous operation ,the leakage current will decrease and reach an almost constant value . After avoltage free storage the oxide layer may deteriorate , especially at high temperature . Since there are no leakage current to transport oxygen ions to the anode , the oxide layer is not regenerated . The result is that ahiger thannormal leakagecurrent will flow whenavoltageis appliedafter prolongedstorage . As the oxide layer is regenerated in use , the leakage current will gradually decrease to its normal level .

The relationship between the leakage current and the voltage applied at constant temperature can be shown schematically as follows :

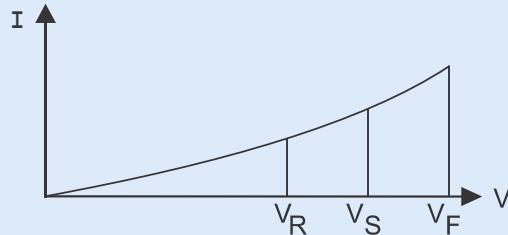


Fig 1-14

Where :

V_F = Forming voltage

If this level is exceeded a large quantity of heat and gas will be generated and the capacitor could be damaged .

V_R = Rated Voltage

This level represents the top of the linear part of the curve .

V_S = Surge voltage

It lies between V_R and V_F : the capacitor can be subjected to V_S for short periods only .



1-5 Reliability

(1) The bathtub curve:

Aluminum electrolytic capacitors feature failure rates shown by the following bathtub curve.

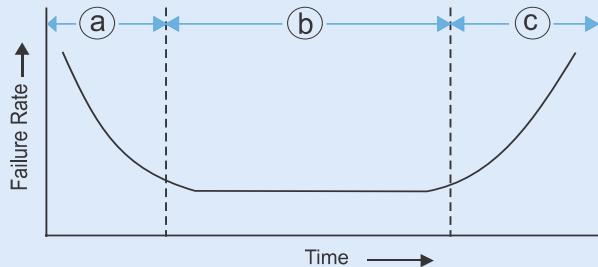


Fig.1-15 Bathtub curve

a. Initial failure period

Deficient Capacitors include any products before dispatch that may have some deficiency caused by the design, production process or used in inappropriate environments.

b. Random failure period

The capacitors have a low defect ratio in the period after it has been stabilized.

c. Wear out failure period

The performance of capacitors will decrease with an increase in usage period. The malfunction rate may vary due to the structural design.

(2) Failure types: (See Table-1)

a). Completely malfunction:

Capacitor is completely disabled to all functions, e.g.: short circuit, open circuit.

b). Malfunction cause by wear and tear gradual malfunctioning of the capacitor, the cause of the malfunction would depend on the environmental conditions.

1-6 Life of the Electrolytic Capacitors

A effects by using condition for the life of electrolytic capacitors which environmental condition & electrical condition .

Environmental condition include temperature , humidity , atmospheric

pressure & vibration...etc. and mostly affected by temperature factor . Electrical condition include voltage , ripple current and charge / discharge condition...etc.

1. Temperature & Life

The reduce capacitance & increase DF will be created by the influence from temperature on the life, such condition mostly caused by a slow evaporation from the electrolyte to seal position; the electric specificity that is affected by timing and surrounding temperature as following formula below and similar to the chemical kinetics of Arrhenius' rule and to be reputed as the connection rule of life in electrolytic capacitors.

$$L_x = L_0 \times B^{\frac{T_0 - T_x}{10}} \quad \text{Eq.1}$$

L_x : Expected Life at Operating Temperature T_x °C (hour)

L_0 : Load Life at Maximum Operating Temperature T_0 °C (hour)

To: Maximum Operating Temperature (°C)

T_x : Actual Operating Temperature. (°C)

B: Accelerate Coefficient of Temperature (≈ 2)

From the Eq.1 , it means about double acceleration for temperature raising at 10 C . Therefore , it comes a longer working life once a temperature setting lower than T_x while products design .

2. Rated Voltage and Life

While working , the voltage under the input of rated voltage and for the reducing of voltage, although with little or more influence to electrolytic capacitors but, no necessary for special concern after compare with the influence by temperature.

Table-1 Failure modes and causes

Failure Modes	Internal Causes	Primary Factors		
		Mismanaged Production	Mishandled Application	Unavoidable Factors in Normal Service
Short Circuit	Short Circuit Between Electrodes Dielectrical Break of Oxide Layer Dielectrical Break of Separator	Burried Foil/Metal Particle Local Deficiency in Oxide Layer		Mechanical Stress
Open Circuit	Disconnection of Terminal Construction Poor Terminal Connection Less Electrolyte Electrolyte Vaporization		Mechanical Stress Poor Connection	
Capacitance Drop $\tan\delta$ (ESR) Increase	Anode Foil Capacitance Drop Cathode Foil Capacitance Drop Deterioration of Oxide Layer Electrolyte Vaporization			Deterioration With Time
Leakage Current Increase	Corrosion Deterioration of Oxide Layer		Excessive Thermal Stress Excessive Operating Voltage Reverse Voltage Excessive Ripple Current Excessive Charge-Discharge Duty	
Open Vent	Internal Pressure Rise	Contamination By Chloride		
Electrolyte Leakage	Poor Sealing	Poor Sealing		Chloride Contamination By Assembly Board Cleaning



1-7 Cleaning Agings

3. Influence of Input Ripple Current Against Working life

Passing of some ripple current when the electrolytic capacitor has a wave filter smoothing function, the internal temperature of electrolytic capacitor will bring some more influence to working life as well. Hence, a maximum ripple current will be listed caused by such ripple current and directly specified by each manufacturer; it has been considered as overlapping by DC voltage & AC voltage when incorporate electrolytic capacitors with a power that ripple current included. The losing electronic power caused by the alternate resistance & direct leakage current inside the electrolytic capacitors will be come to heat. Kindly refer to following for relation between in rated ripple current and temperature raising:

$$W = (I_{\text{Ripple}})^2 \cdot R_{\text{ESR}} + V \cdot I_{\text{Leakage}} \quad \text{Eq.3}$$

where W: Internal power loss

I Ripple : Ripple current

R ESR: Equivalent Series Resistance

V : Applied voltage

I Leakage : Leakage current

Normally the losing voltage power of DC leakage current that caused by the DC voltage which to be inflicted in the electrolytic capacitor will be lower than a losing voltage power caused by ripple current, therefore:

$$W \approx (I_{\text{RIPPLE}})^2 \cdot R_{\text{ESR}} \quad \text{Eq.4}$$

The formula for reaching of temperature balance on the internal temperature raising as well as the hot dissipation as below:

$$W \approx (I_{\text{RIPPLE}})^2 \cdot R_{\text{ESR}} = \beta \cdot A \cdot \Delta T \quad \text{Eq.5}$$

β : Heat radiation constant

A= Surface area of container (cm)²

A= $\pi/4 \cdot D \cdot (D + 4L)$

D: case diameter (cm)

L: case length (cm)

ΔT : Temperature raising created by internal heating (°C).

Through the formula above can see the temperature raising caused by the ripple current and:

$$\Delta T = \frac{(I_{\text{RIPPLE}})^2 \cdot R_{\text{ESR}}}{\beta A} = \frac{(I_{\text{RIPPLE}})^2 \cdot \tan \delta}{\beta A \omega C} \quad \text{Eq.6}$$

Due to : $R_{\text{ESR}} = \frac{\tan \delta}{\omega C}$

$\tan \delta$: DF at 120Hz

w : $2\pi f$ (f = 120Hz)

C : The static capacity (F) at 120Hz

In general, the allowed ripple current value would be specifically listed by the manufacturer - A revised coefficient of allowed ripple current & working frequency to the electrolytic capacitor.

Table-2 Snap-in terminal type capacitors (for input smoothing circuit)

Frequency (Hz)	50	60	120	1K	10K~100K
Frequency	6.3~100V	0.88	0.90	1.00	1.15
Coefficient	160~250V	0.85	0.88	1.00	1.15
Kf	315~450V	0.88	0.90	1.00	1.10

Table-3 Lead type capacitors (for output smoothing circuit)

Frequency (Hz)	50	120	300	1K	10K	100K
~47μF	0.30	0.40	0.50	0.70	0.80	1.00
5.6~33 μF	0.40	0.50	0.60	0.80	0.90	1.00
34~330 μF	0.60	0.70	0.80	0.90	0.95	1.00
331~1000 μF	0.65	0.90	0.90	0.98	1.00	1.00
1200μF~Higher	0.85	0.90	0.95	0.98	1.00	1.00

Table-4 The coefficient between allowed ripple current & working temperature to the electrolytic capacitors.

Type	Surrounding Temp[°C]					Revised coefficient of Temperature				
	60	65	70	85	105	60	65	70	85	105
Snap-in terminal type	2.37		2.17	1.67	1.00					
Lead type capacitors		1.80		1.50	1.00					


Circuit Board Cleaning

1. Foreword

When a halide substance seeps into the aluminum electrolytic capacitor The halide dissolves and frees halogen ions.



Also the following reaction can occur



When this reaction is repeated. The leakage current increases and the safety vent will be activated and may lead to open vent. Because of this halogen type cleaning agents or adhesive material and coating material is not recommended for usage. The following explains the recommended condition for cleaning. When a halogen type cleaning agent will be used due to cleaning capabilities.

2. Recommended Cleaning Condition

Applicable : Any type.any ratings

Cleaning Agents : Pine Alpha ST-100S

Clean Through 750H,750L,710M

Sanelek B-12

Aquaq Cleaner 210 SEP

Techno Care FRw 14~17

Isopropyl Alcohol

Cleaning Conditions : Total cleaning time shall be no greater than 5 minutes by immersion , ultrasonic or other method .

After cleaning , capacitors should be dried using hot air for minimum of 10 minutes along with the PC board .

Hot air temperature should be below the maximum operating temperature of the capacitor .

Insufficient dries after water runse may cause appearance problems , such as sleeve shrinking , bottom-plate bulging .

It is recommended to monitor conductivity , pH , and concentration of the agent . Please do not keep a product after cleaning in condition that cleaning agents exists as steam, or in non ventilated containers .

3. CFC substitute

The anti-solvent capacitor listed in the catalogue can be cleaned using AK-255AES. If used within the following condition.

Please monitor contamination of solution by measuring conductivity, pH , specific gravity , water content and such .

Furthermore , do not store capacitors in a cleaning agent atmosphere or sealed container after cleaning .

Also avoid using ozone depleting substances for cleaning agents in difference to our global environments.

Applicable : Anti-solvent capacitors

Cleaning Agents : AK-255AES

Cleaning Conditions : Within 5 minutes, total cleaning time by immersion , vapor spray , or ultrasonic and such . For SMD and ultra-miniature type 2 minutes maximum of total cleaning time .

4. Fixing Material and Coating Material

· DO not use any affixing or coating materials, which contain halide substance.

· Remove flux and any contamination, which remains in the gap between the end seal and PC board.

· Remove flux and any contamination, which remains in the gap between the end seal and PC board.


· Please dry the cleaning agent on the PC board before using affixing or coating material.

· Please do not apply any material all around the end seal when using affixing or coating material.

There are variations of cleaning agents, fixing and coating material, so please contact those manufacture or our sales office to make sure that the material would not cause any problems.




RADIAL TYPE ORDERING CODE

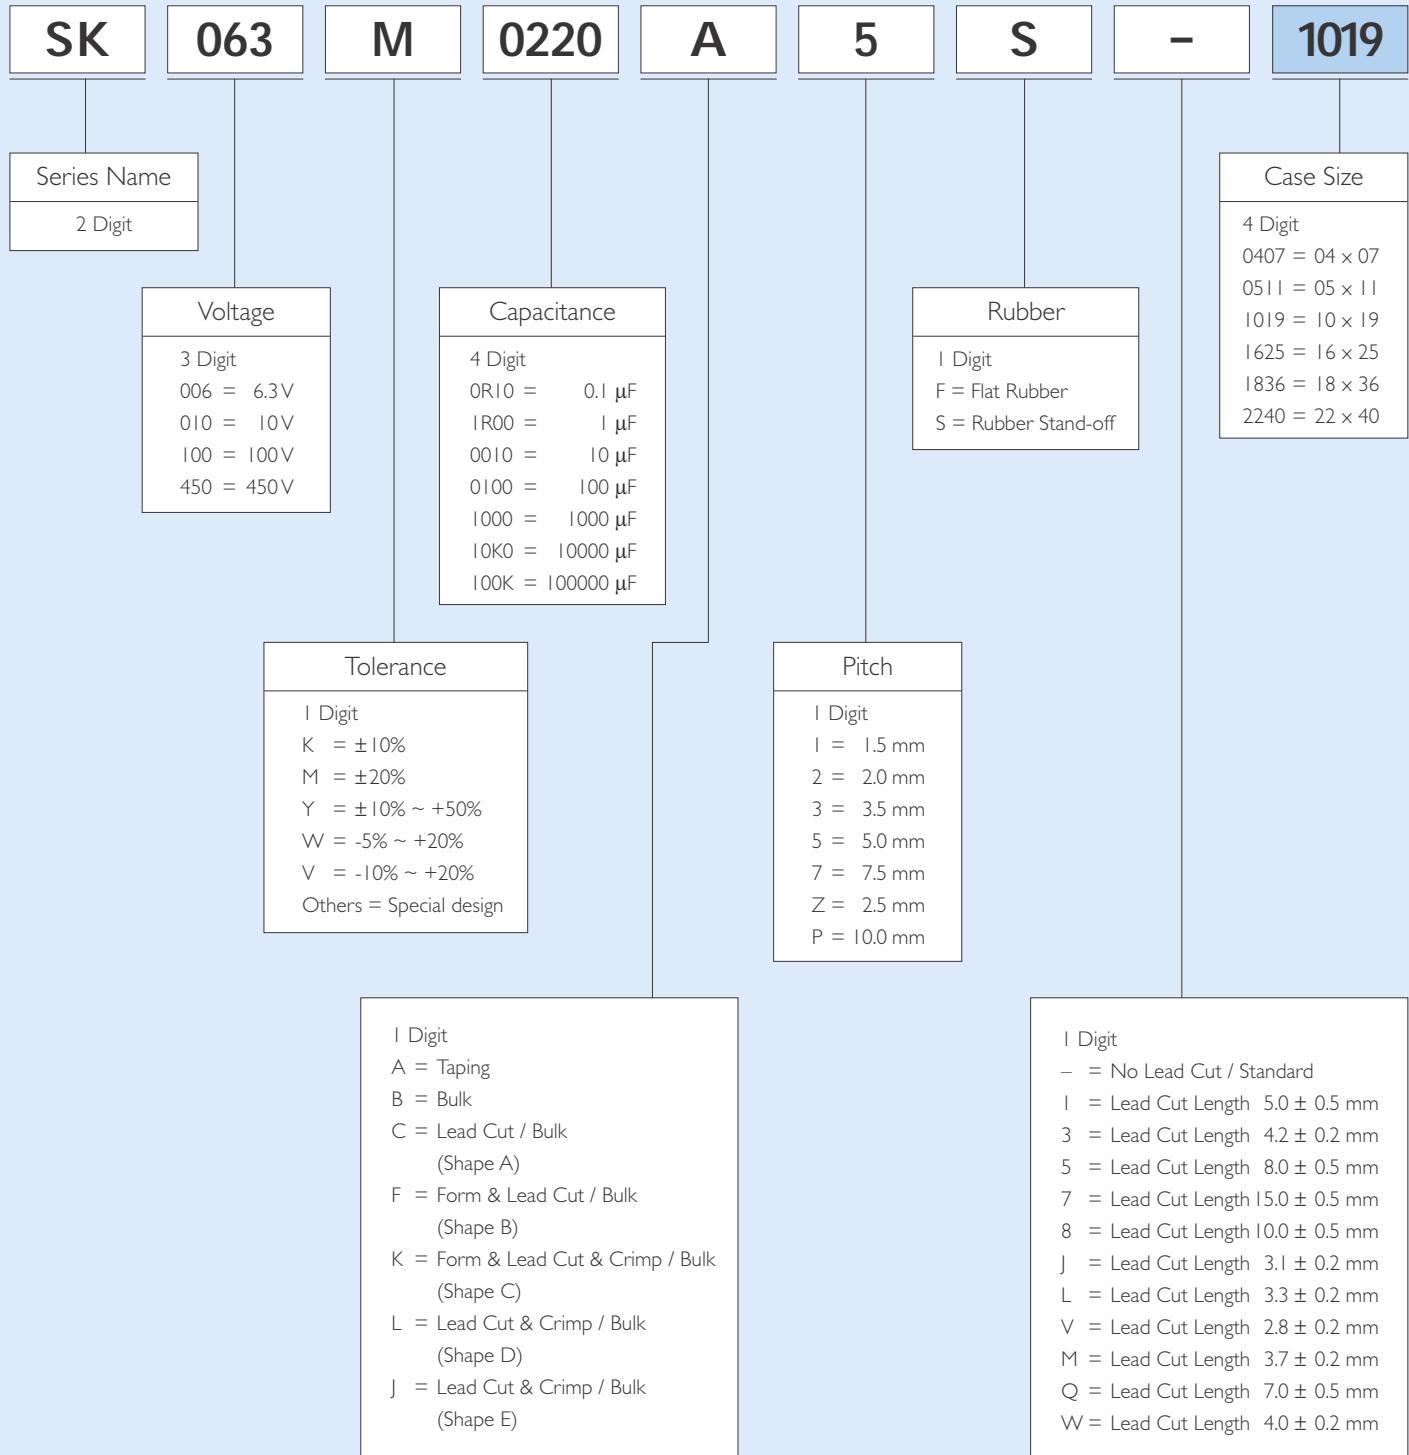



SNAP IN TYPE ORDERING CODE

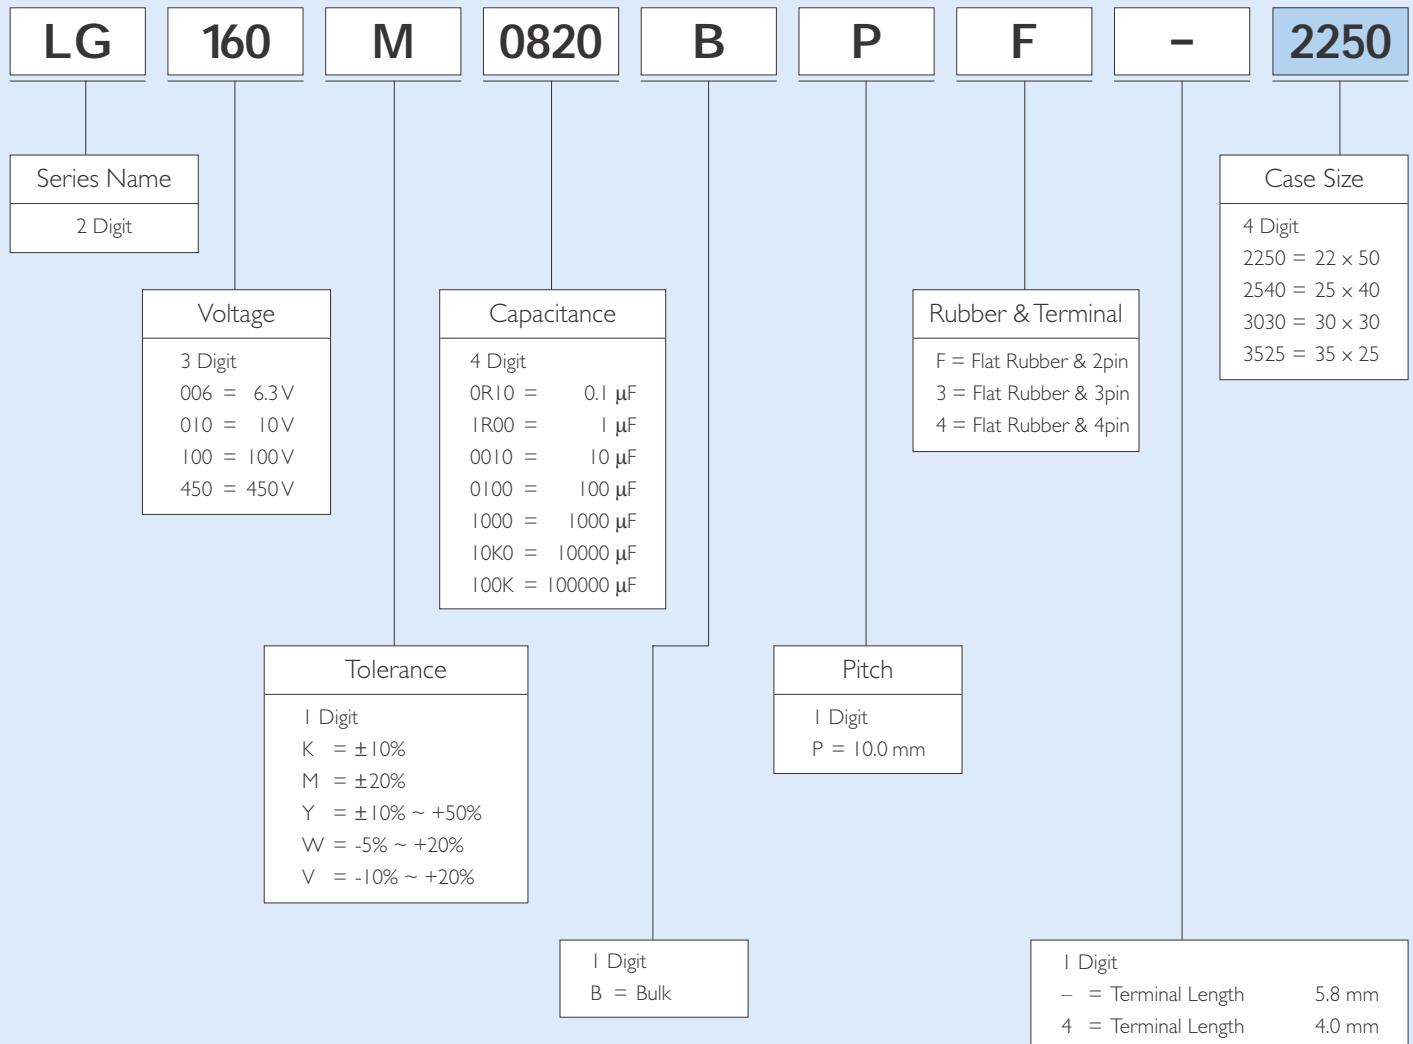



SMD TYPE ORDERING CODE

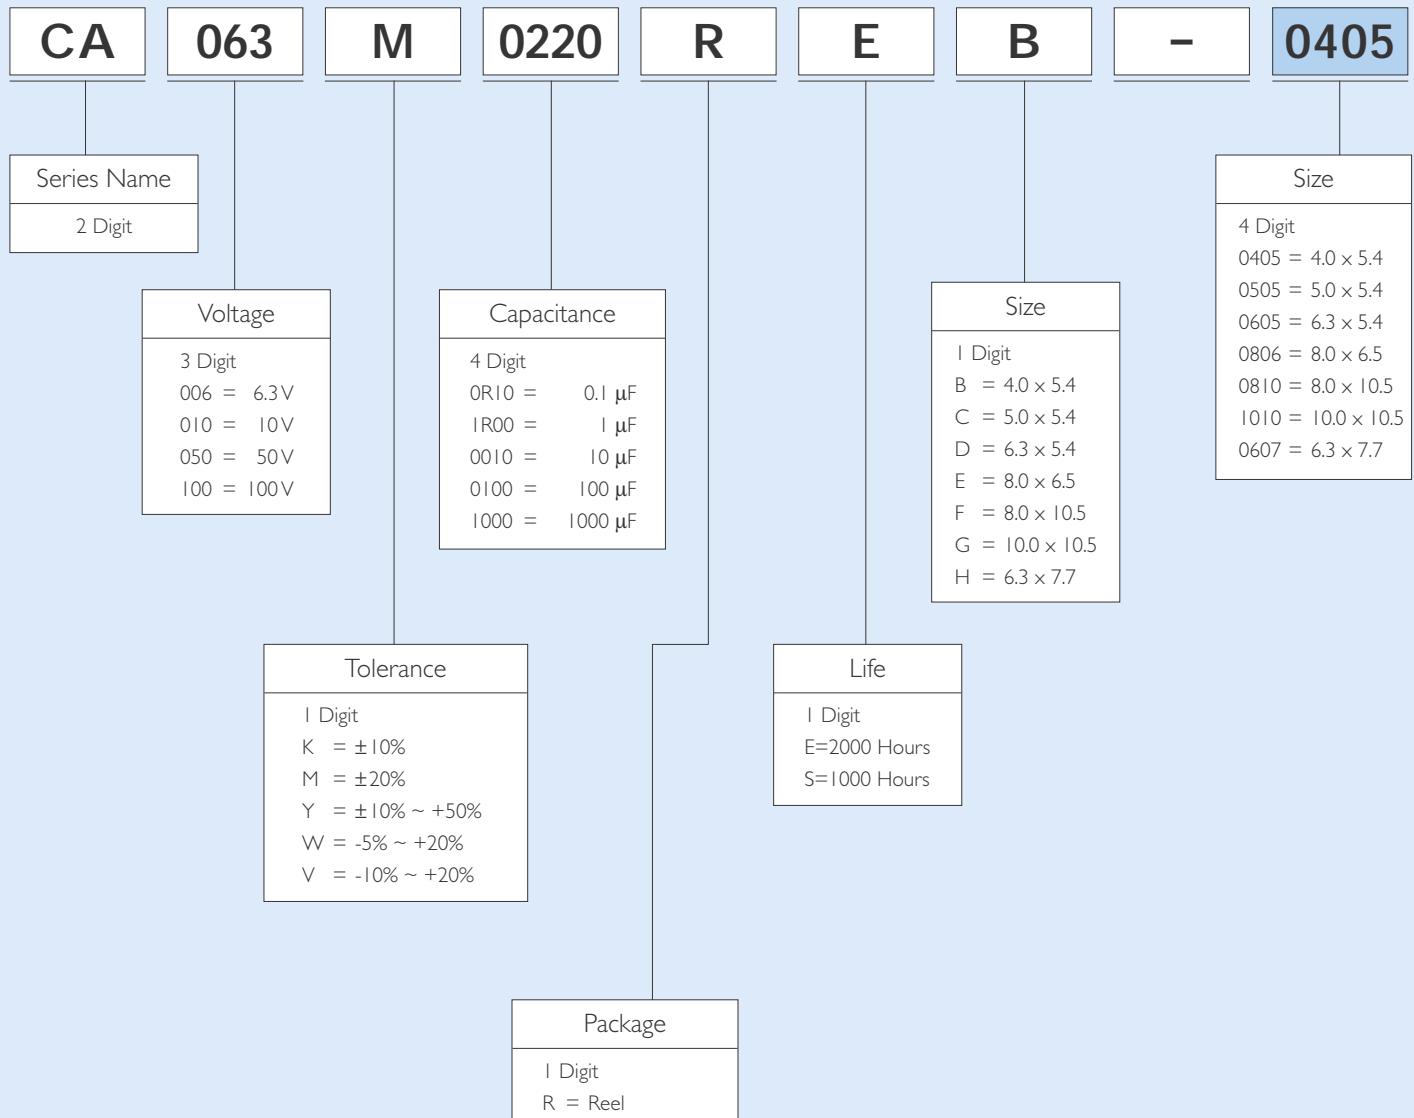




DIAGRAM OF TAPING DIMENSIONS

Unit : mm

Fig. 1

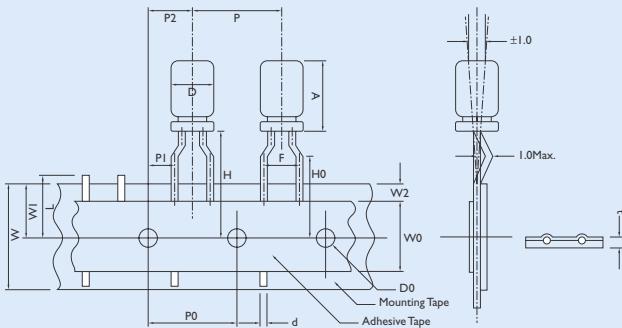


Fig. 4

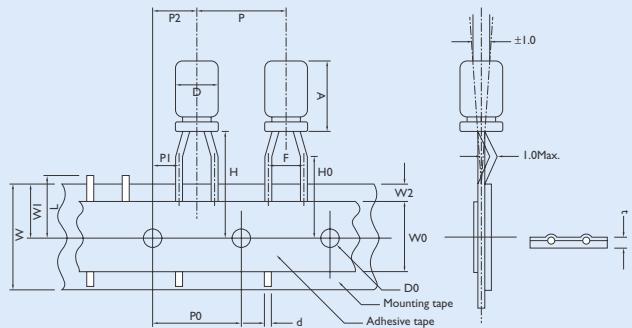


Fig. 2

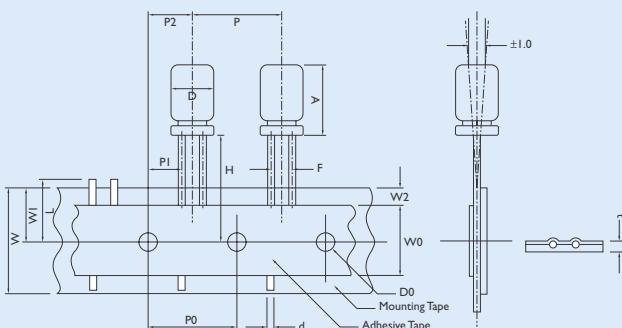


Fig. 5

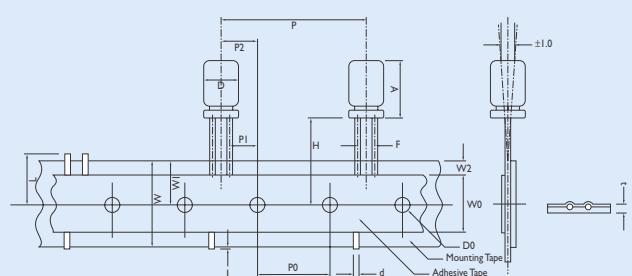


Fig. 3


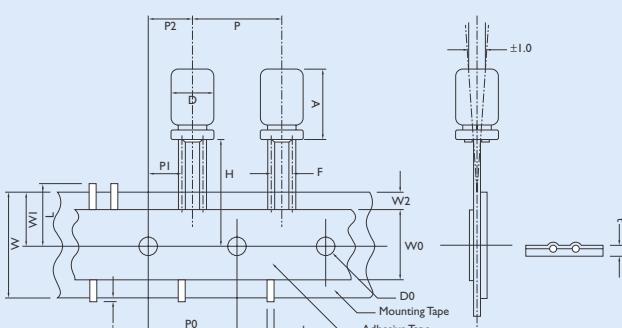


Fig. 6



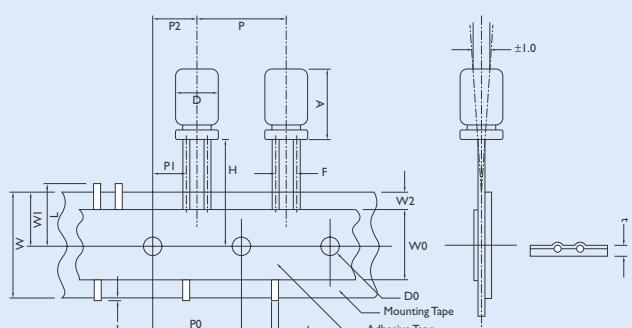

SPECIFICATIONS INFORMATION

Unit : mm


ITEM	TOLERANCE	PH = 2.5	FORMED LEAD TYPE						STRAIGHT LEAD TYPE									
			L			L			L									
			5~7	≤7	>7	5~7	≤7	>7	≤7	>7	≤7	>7	≤7	>7	12~25	15~25	15~25	
D	+0.5 -0	4ø 5ø	4ø	5ø		6ø		8ø		4ø	5ø	6ø		8ø	10ø	12ø	12.5ø 13ø	16ø 18ø
A	Max.	8.0	13	8.0		13	8.0	13	8.0	22.0	8.0	13	8.0	13	8.0	22.0	27.0	
d	±0.05	0.45	0.5	0.45	0.5	0.5	0.5	0.5	0.5	0.45	0.5	0.5	0.5	0.5	0.5	0.6		0.8
P	±1.0	12.7		12.7						12.7					15.0		30.0	
P0	±0.3	12.7		12.7						12.7					15.0			
P1	±0.7	5.1		3.85						5.6	5.35	5.1		4.6	3.85		3.75	
P2	±1.3	6.35		6.35						6.35					7.5			
F	+0.8, -0.2	2.5		5.0						1.5	2.0	2.5		3.5	5.0		7.5 ± 0.8	
W	+1.0, -0.5	18.0		18.0						18.0								
W0	±0.5	12.0		12.0						12.0								
WI	±0.5	9.0		9.0						9.0								
W2	Max.	3.0		3.0						3.0								
H	±0.75	18.5		18.5						18.5								
H0	±0.5	16.0		16.0						—								
I	Max.	—		—						—				1.0				
D0	±0.2	4.0		4.0						4.0								
t	±0.2	0.7		0.7						0.7								
L	Max.	11.0		11.0						11.0								
Fig.		4		1						2				3, 6		5		




DIAGRAM OF LEAD CUTTING AND FORMING

Unit : mm


Shape (A)

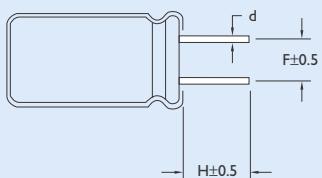


Shape (C)

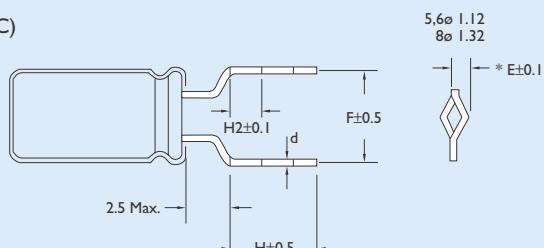


Shape (B)

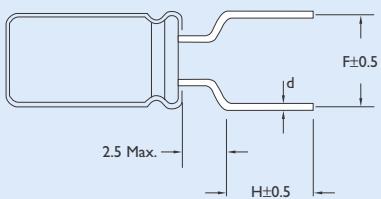

Shape (D)

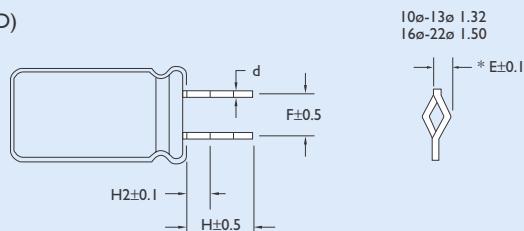

Shape (E)

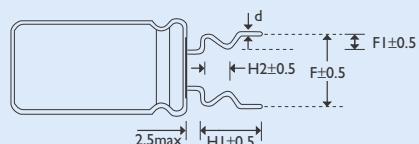

SPECIFICATIONS INFORMATION

Unit : mm

NO.CUTTING &

FORMING METHODS		Ø 4	5	6	8	10	12	13	16	18	22
A Lead Cut Only	F	1.5	2.0	2.5	3.5	5.0	5.0	5.0	7.5	7.5	10
	H	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
	d	0.45	0.5	0.5	0.5	0.6	0.6	0.6	0.8	0.8	0.8
B Lead Cut and Form	F	5.0	5.0	5.0	5.0						
	H	5.0	5.0	5.0	5.0						
	d	0.45	0.5	0.5	0.5						
C Lead Cut, Crimp and Form	F	5.0	5.0	5.0	5.0	5.0					
	H1	5.0	4.2	5.0	4.2	4.0	5.0	4.2	4.0		
	H2	2.5	2.0	2.5	2.0	2.0	2.5	2.0	2.0		
	d	0.45	0.5	0.5	0.5	0.5	0.5	0.5	0.5		
D Lead Cut and Crimp	F					5.0	5.0	5.0	7.5	7.5	10
	H1					5.0	4.2	4.0	5.0	4.2	4.0
	H2					2.5	2.0	2.0	2.5	2.0	2.0
	d					0.6	0.6	0.6	0.8	0.8	0.8
E Lead Cut Form and Crimp	F	5.0	5.0	5.0	5.0						
	F1	1.2	1.2	1.2	1.2						
	H1	4.0	4.0	4.0	4.0						
	H2	1.8	1.8	1.8	1.8						
	d	0.45	0.5	0.5	0.5						




PACKAGE INFORMATION

TYPE	D x L	BULK		TAPING		LEAD CUTTING			
		I BAG/PCS	I INNER BOX	I CARTON	I INNER BOX	I CARTON	I BAG/PCS	I INNER BOX	I CARTON
RADIL	(mm)								
	04 x 05	1000	10,000	20,000	2,500	25,000	1000	15,000	30,000
	05 x 05	1000	10,000	20,000	2,000	20,000	1000	15,000	30,000
	06 x 05	1000	10,000	20,000	2,000	20,000	1000	15,000	30,000
	04 x 07	1000	10,000	20,000	2,500	25,000	1000	15,000	30,000
	05 x 07	1000	10,000	20,000	2,000	20,000	1000	15,000	30,000
	06 x 07	1000	10,000	20,000	2,000	20,000	1000	15,000	30,000
	05 x 11	500	10,000	20,000	2,000	20,000	500	15,000	30,000
	06 x 11	500	10,000	20,000	2,000	20,000	500	15,000	30,000
	08 x 11	500	6,000	12,000	1,000	10,000	500	8,000	16,000
	08 x 15	500	5,000	10,000	1,000	10,000	500	5,000	10,000
	08 x 20	200	4,000	8,000	1,000	10,000	200	4,000	8,000
	10 x 12	200	4,000	8,000	700	7,000	200	4,000	8,000
	10 x 15	200	3,000	6,000	700	7,000	200	4,000	8,000
	10 x 16	200	3,000	6,000	700	7,000	200	4,000	8,000
	10 x 19	200	2,400	4,800	700	7,000	200	3,000	6,000
	10 x 25	200	2,400	4,800	700	7,000	200	2,400	4,800
	10 x 27	200	2,000	4,000			200	2,000	4,000
	10 x 30	200	2,000	4,000			200	2,000	4,000
	12 x 20	200	2,000	4,000	500	5,000	200	2,000	4,000
	12 x 25	200	1,800	3,600	500	5,000	200	1,800	3,600
	12 x 30	200	1,600	3,200	500	5,000	200	1,600	3,200
	12 x 35	200	1,000	2,000	500	5,000		500	3,000
	12 x 40	200	1,000	2,000	500	5,000		500	3,000
	13 x 20	200	1,800	3,600	500	5,000	200	1,800	3,600
	13 x 25	200	1,400	2,800	500	5,000	200	1,400	2,800
	13 x 30	200	1,200	2,400	500	5,000		500	3,000
	13 x 40	200	1,000	2,000	500	5,000		500	3,000
	16 x 25	200	1,000	2,000	300	3,000		500	4,000
	16 x 32	200	800	1,600				500	3,000
	16 x 36	200	600	1,200				500	3,000
	16 x 40	200	600	1,200				500	3,000
	18 x 20	200	800	1,600			200	1,000	2,000
	18 x 25	200	800	1,600				500	2,000
	18 x 32	100	500	1,000				500	2,000
	18 x 36	100	500	1,000				500	2,000
	18 x 40	100	500	1,000				500	2,000
	22 x 40	100	300	600				400	800

TYPE	D x L	BULK			
		SNAP-IN (mm)	I BAG/PCS	I INNER BOX	I CARTON
	22 x 25 ~ 45		400	800	
	25 x 25 ~ 50		200	400	
	30 x 25 ~ 35		200	400	
	30 x 40 ~ 50		200	400	
	35 x 30 ~ 50		200	400	




1. Carrier Tape Dimension

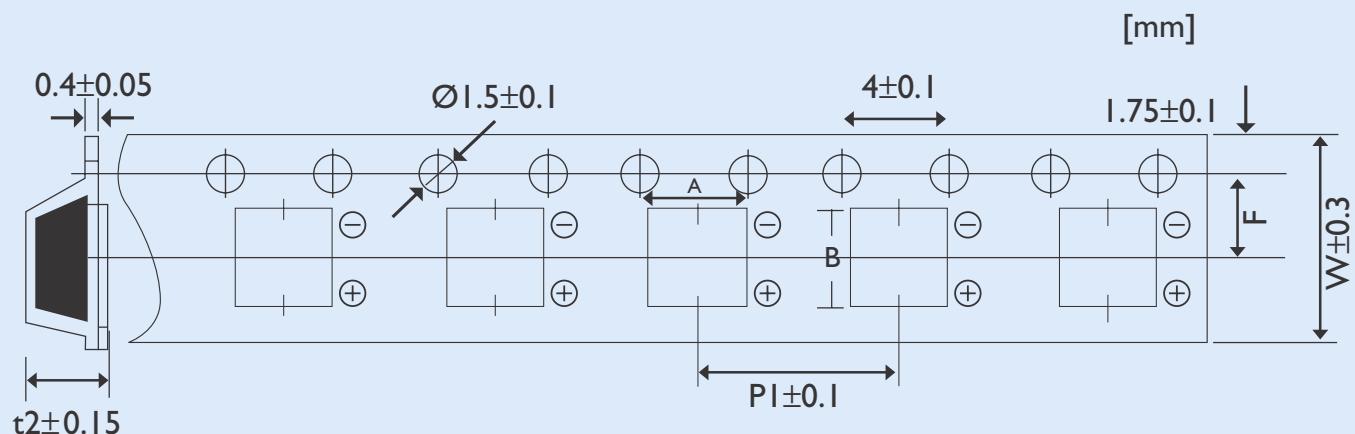

CASE SIZE	(ØD mm)	W	A	B	P1	F	t2
B	$\varnothing 4$	12.0	4.7	4.7	8.0	5.5	5.75
C	$\varnothing 5$	12.0	5.7	5.7	12.0	5.5	5.8
D	$\varnothing 6.3 \times 5.4$	16.0	7.0	7.0	12.0	7.5	5.75
E	$\varnothing 8 \times 6.2$	16.0	8.7	8.7	12.0	7.5	6.8
F	$\varnothing 8 \times 10.2$	24.0	8.7	8.7	16.0	11.5	11.0
G	$\varnothing 10 \times 10.2$	24.0	10.7	10.7	16.0	11.5	11.0
H	$\varnothing 6.3 \times 7.7$	16.0	7.0	7.0	12.0	7.5	8.0


2. Reel Dimension

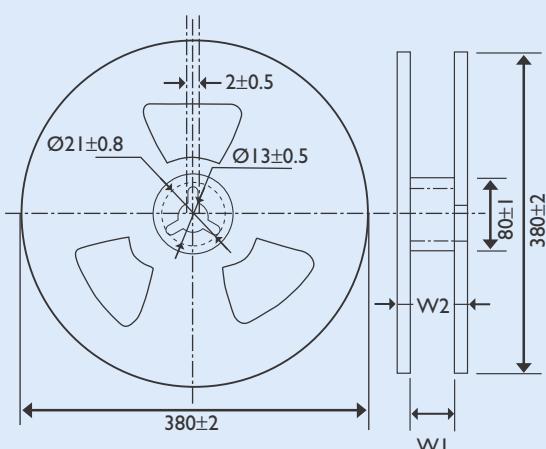

SIZE CODE	B	C	D	E	F	G
W1	14	14	18	18	26	26
W2	18	18	22	22	30	30



3. Details of Carrier Tape

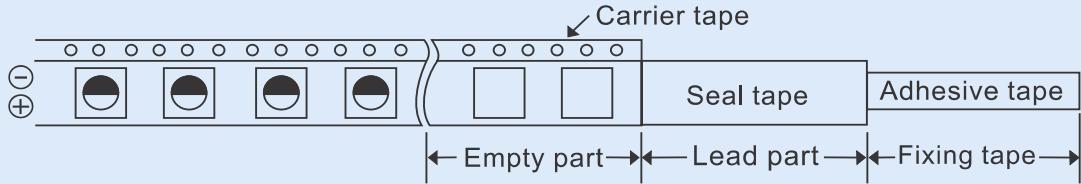


(1)


- a. Last reeling empty part of carrier tape shall be more than .10 cm
- b. Leader part of seal tape shall be more than 20 cm.
- c. First reeling Empty part of carrier tape shall be more than 10 cm
- d. Adhesive tape fixing the end of the leader part shall be approx.10 cm

(2) Deviation between carrier tape and seal tape

- a. Deviation between carrier tape and seal tape shall be less than 0.5 mm.

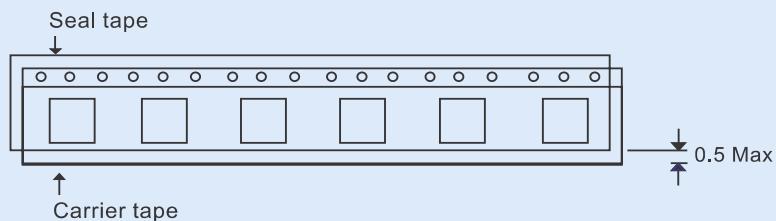


- b. Seal tape shall not cover on the feeding holes more than 0.75 mm.

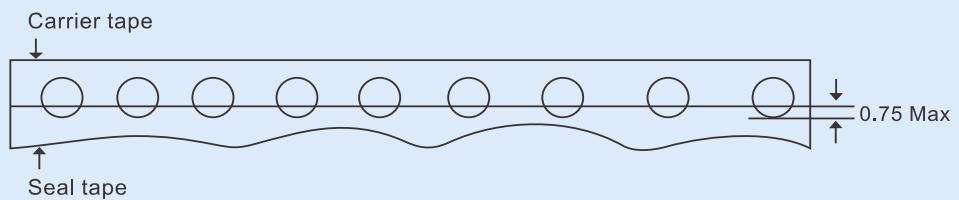

4. Adhesion Test

Reasonable pulling strength: 0.1~0.7N
Pulling speed: 300mm / min

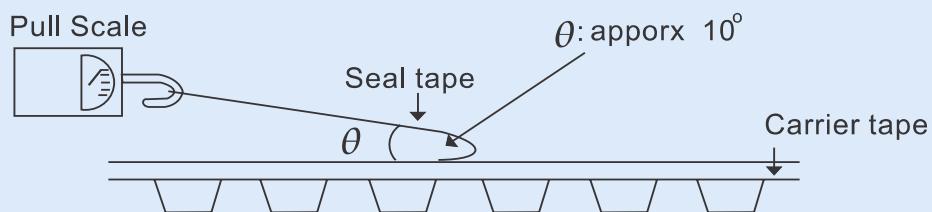




5. Packing Style

(1) Carrier tape shall be reeled inside.(seal tape shall be outside)

(2) End of the tape shall be inside to the reel physically as shown in the below figure and leader part of seal tape shall not be attached.

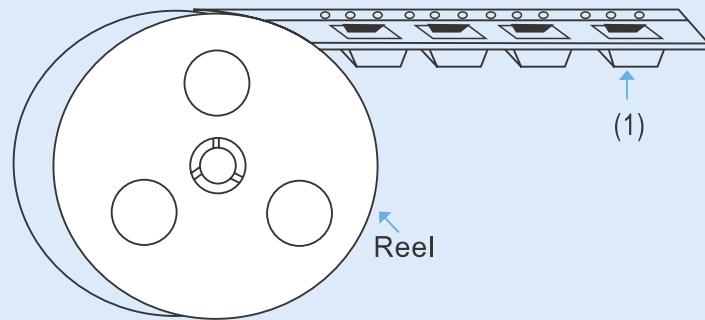


6. Packaging Quantity

Size Code	D x L	One Reel (pcs)	Total Quantity pcs)
B	4x5.4	2000	20000
C	5x5.4	1000	10000
D	6.3x5.4	1000	10000
E	6.3x7.7	1000	10000
F	8x6.2	1000	10000
G	8x10.2	500	3000
H	10x10.2	500	3000




Reflow soldering for chip capacitors

- (1) For reflow, use a thermal conduction system such as infrared radiation (IR) or hot blast. Vapor heat transfer systems (VPS) are not recommended.
- (2) Provide proper soldering conditions(temperature, time, etc.). Do not exceed the specified limits.
- (3) Reflow should be performed one time. Consult us for additional reflow restrictions.
- (4) Reflow soldering profile for standard :

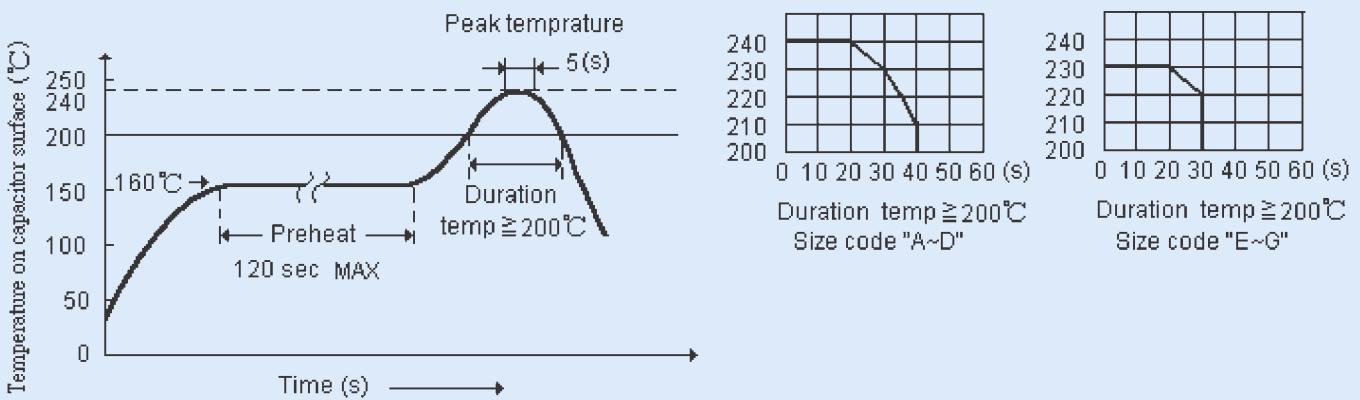

- (5) Reflow soldering profile for lead free :

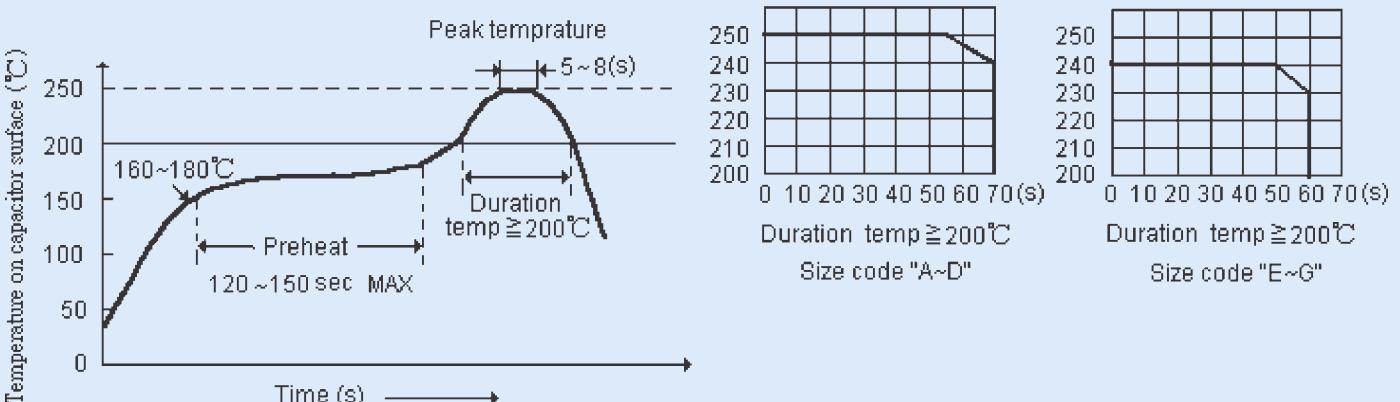


■ Manual Soldering

- (1) Observe temperature and time soldering specifications or do not exceed temperatures of 300°C for 3 seconds or less.
- (2) If a soldered capacitor must be removed and reinserted , avoid excessive stress on the capacitor leads.

■ Capacitor handling after soldering

- (1) Avoid moving the capacitor after soldering to prevent excessive stress on the lead wires where they enter the seal.
- (2) Do not use the capacitor as a handle when moving the circuit board assembly.
- (3) Avoid striking the capacitor after assembly to prevent failure due to excessive shock.

Miniature Size Aluminum Electrolytic Capacitors

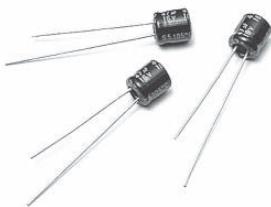

DESCRIPTION

This type is designed for saving space and high density insertion.


Applications : VTR, Camera, Car Audio, Mini Audio and Other Industrial and Commercial Applications

Cap(μF)	Freq.(Hz)	50	120	300	1K	10K-
~47		0.75	1.00	1.35	1.57	2.00
100~300		0.80	1.00	1.23	1.34	1.50

Temperature coefficient

Temperature(°C)	-55	60	70	85
Factor	1.65	1.50	1.30	1.00

DIAGRAM OF DIMENSIONS

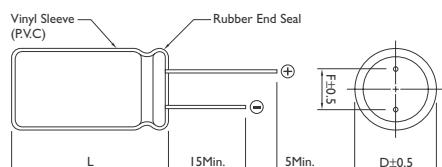

ST [For Super Miniature]

85°C Single-Ended Lead, 5.0mm Height Type Aluminum Electrolytic Capacitors

ELECTRICAL CHARACTERISTICS

Operating Temperature : -40° ~ +85°C

Working Voltage : 4 ~ 50V

Rate Capacitance Range : 0.1 ~ 330μF

Capacitance Tolerance : -20 ~ +20%

DC Leakage Current (μA) : $I = 0.01CV$ (μA) or 3μA Whichever is greater.
(After 2 Minutes Application of DC Working Voltage at 25°C)

Dissipation Factor : at 120 Hz, 25°C

WV (V)	4	6.3	10	16	25	35	50
ø3	40	38	30	23	17	15	13
ø4~ø8	35	24	20	16	14	12	10

Load Life : 1000 Hours at 85°C Assured with Full Rated Maximum Ripple Current Applied


- (a) Capacitance Change : Within 20% of Initial Value
- (b) Dissipation Factor : Not Exceed 200% of Initial Requirement
- (c) Leakage Current : Not Exceed the Initial Requirement

Shelf Life : 500 Hours, No Voltage Applied, at 85°C

- (a) Capacitance Change : Within 20% of Initial Value
- (b) Dissipation Factor : Not Exceed 200% of Initial Requirement
- (c) Leakage Current : Not Exceed 200% of Initial Requirement

Dimensions : mm

Rubber Stand-off

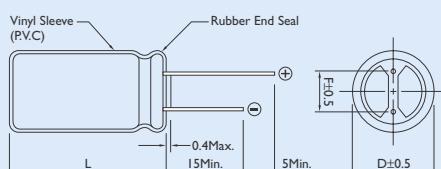

$L \leq 12$ $L + 1.5\text{Max.}$
 $13 \leq L \leq 15$ $L^{+1.0}_{-0.5}$
 $L \geq 16$ $L + 2.0\text{Max.}$

Dø	F	dø
4.0	1.5	0.45
5.0	2.0	
6.3	2.5	
8.0	3.5	0.5



CASE SIZE & PERMISSIBLE RIPPLE CURRENT OF STANDARD PRODUCTS

CAP. (μF) RATED VOLTAGE WV


	Size	4 Ripple	Size	6.3 Ripple	Size	10 Ripple	Size	16 Ripple	Size	25 Ripple	Size	35 Ripple	Size	50 Ripple	
0.1													4 x 5	1.0	
0.22													4 x 5	2.0	
0.33													4 x 5	2.8	
0.47													4 x 5	4.0	
1.0													4 x 5	8.4	
2.2											3 x 5	8.4	4 x 5	13	
3.3									3 x 5	10	4 x 5	15	4 x 5	17	
4.7							3 x 5	10	4 x 5	16	4 x 5	18	5 x 5	20	
10		3 x 5	19	4 x 5	28	5 x 5	33	5 x 5	37	6 x 5	42	6 x 5	46	8 x 5	52
33		4 x 5	28	4 x 5	37	5 x 5	41	6 x 5	49	6 x 5	52	8 x 5	62	8 x 5	71
47		4 x 5	33	4 x 5	45	5 x 5	45	6 x 5	52	6 x 5	58	8 x 5	70	8 x 5	80
100		5 x 5	56	6 x 5	70	8 x 5	80	8 x 5	92	8 x 5	110				
220		6 x 5	96	8 x 5	110	8 x 5	135								
330		8 x 5	145												

Note : * I. D x L : mm

* 2. Size : 6 x 5 Actually is 6.3 x 5

* 3. mA rms at 85°C, 120Hz

Miniature Size Aluminum Electrolytic Capacitors

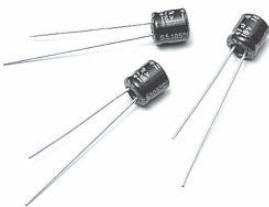

DESCRIPTION

This type is designed to meet the demand or equipments for greatly reduced size and thickness, such as: portable micro computer, disk driver, small calculator and audio equipment.


Frequency coefficient

Cap(μF)	Freq.(Hz)	50	120	300	1K	10K-
~47		0.75	1.00	1.35	1.57	2.00
100~470		0.80	1.00	1.23	1.34	1.50

Temperature coefficient

Temperature(°C)	-55	60	70	85
Factor	1.65	1.50	1.30	1.00

DIAGRAM OF DIMENSIONS

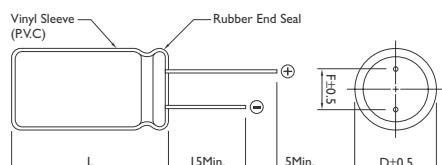

S7 [For Super Miniature]

85°C Single-Ended Lead, 5.0mm Height Type Aluminum Electrolytic Capacitors

ELECTRICAL CHARACTERISTICS

Operating Temperature : -40° ~ +85°C

Working Voltage : 4 ~ 50V

Rate Capacitance Range : 0.1 ~ 470μF

Capacitance Tolerance : -20 ~ +20%

DC Leakage Current (μA) : $I = 0.01CV$ (μA) or 3μA Whichever is greater:

(After 2 Minutes Application of DC Working Voltage at 25°C)

Dissipation Factor : at 120 Hz, 25°C

WV (V)	4	6.3	10	16	25	35	50
D.F (%)	35	24	20	16	14	12	10

Load Life : 1000 Hours at 85°C Assured with Full Rated Maximum Ripple Current Applied

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement

(c) Leakage Current : Not Exceed the Initial Requirement

Shelf Life : 500 Hours, No Voltage Applied, at 85°C


(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement

(c) Leakage Current : Not Exceed 200% of Initial Requirement

Dimensions : mm

Rubber Stand-off

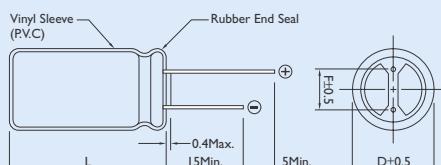

$L \leq 12 \quad L + 1.5\text{Max.}$
 $13 \leq L \leq 15 \quad L^{+0.0}_{-0.5}$
 $L \geq 16 \quad L + 2.0\text{Max.}$

Dø	F	dø
4.0	1.5	0.45
5.0	2.0	
6.3	2.5	
8.0	3.5	0.5



CASE SIZE & PERMISSIBLE RIPPLE CURRENT OF STANDARD PRODUCTS

CAP. (μF) RATED VOLTAGE WV


CAP. (μF)	6.3 Ripple		10 Ripple		16 Ripple		25 Ripple		35 Ripple		50 Ripple	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.1											4 x 7	10
0.22											4 x 7	2.3
0.33											4 x 7	3.5
0.47											4 x 7	5.0
1.0											4 x 7	10
2.2											4 x 7	19
3.3											4 x 7	24
4.7									4 x 7	24	4 x 7	28
10					4 x 7	28	4 x 7	28	4 x 7	31	5 x 7	38
22	4 x 7	34	4 x 7	35	4 x 7	39	5 x 7	48	5 x 7	52	6 x 7	58
33	4 x 7	40	4 x 7	43	5 x 7	59	5 x 7	58	6 x 7	65	8 x 7	75
47	4 x 7	48	5 x 7	59	5 x 7	65	6 x 7	71	8 x 7	85		
100	5 x 7	78	6 x 7	87	6 x 7	98	8 x 7	115				
220	6 x 7	120	8 x 7	145								
330	8 x 7	180	8 x 7	201								
470	8 x 7	215										

Note : * I. D x L : mm

* 2. Size : 6 x 7 Actually is 6.3 x 7

* 3. mA rms at 85°C, 120Hz

Miniature Size Aluminum Electrolytic Capacitors

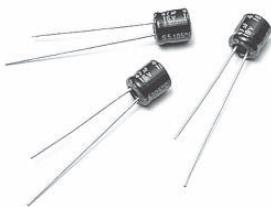

DESCRIPTION

The S5 series are smaller than SS series.

This type is designed for saving space and high density insertion.

Applications : VTR, Camera, Car Audio, Miniaudio and Other Industrial and Commercial Applications

Multiplier for Ripple Current


Frequency coefficient

Frequency (Hz)	20	300	1K	10K~100K
0.1~47μF	1.00	1.20	1.30	1.50
100~330μF	1.00	1.10	1.15	1.20

Temperature coefficient

Temperature(°C)	65	85	105
Factor	1.40	1.20	1.00

DIAGRAM OF DIMENSIONS

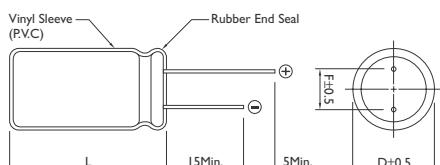

S5 [For Super Miniature]

105°C Single-Ended Lead, 5.0mm Height Type Aluminum Electrolytic Capacitors

ELECTRICAL CHARACTERISTICS

Operating Temperature : -40° ~ +105°C

Working Voltage : 6.3 ~ 50V

Rate Capacitance Range : 0.1 ~ 470μF

Capacitance Tolerance : -20 ~ +20%

DC Leakage Current (μA) : $I = 0.01CV$ (μA) or 3μA Whichever is greater.

(After 2 Minutes Application of DC Working Voltage at 25°C)

Dissipation Factor : at 120 Hz, 25°C

WV (V)	6.3	10	16	25	35	50	-
D.F (%)	24	20	16	14	12	10	-

Load Life : 1000 Hours at 105°C Assured with Full Rated Maximum Ripple Current Applied

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement

(c) Leakage Current : Not Exceed the Initial Requirement

Shelf Life : 500 Hours, No Voltage Applied, at 105°C


(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement

(c) Leakage Current : Not Exceed 200% of Initial Requirement

Dimensions : mm

Rubber Stand-off

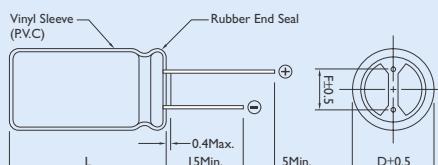

$L \leq 12 \quad L + 1.5\text{Max.}$
 $13 \leq L \leq 15 \quad L^{+0.0}_{-0.5}$
 $L \geq 16 \quad L + 2.0\text{Max.}$

Dø	F	dø
4.0	1.5	0.45
5.0	2.0	
6.3	2.5	
8.0	3.5	0.5



CASE SIZE & PERMISSIBLE RIPPLE CURRENT OF STANDARD PRODUCTS

CAP. (μF) RATED VOLTAGE WV


CAP. (μF)	RATED VOLTAGE WV									
	6.3 Ripple	10 Ripple	16 Ripple	25 Ripple	35 Ripple	50 Ripple	Size	Size	Size	Size
0.1										4 x 5
0.22										4 x 5
0.33										4 x 5
0.47										4 x 5
1.0										4 x 5
2.2										4 x 5
3.3					4 x 5	13				4 x 5
4.7	4 x 5	16		4 x 5	20	4 x 5	16	4 x 5	18	4 x 5
										5 x 5
										20
10	4 x 5	18	4 x 5	20	4 x 5	23	4 x 5	20	5 x 5	30
										6 x 5
										33
22	4 x 5	28	5 x 5	33	4 x 5	29	6 x 5	42	6 x 5	48
					5 x 5	37				6.3 x 5
33	4 x 5	33	4 x 5	34	5 x 5	44	5 x 5	45		
			5 x 5	41	6 x 5	49	6 x 5	53		
47	4 x 5	35	5 x 5	46	5 x 5	54	5 x 5	55		
	5 x 5	45			6 x 5	58	6.3 x 5	65		
68			6 x 5	54						
100	5 x 5	55	6 x 5	80	6 x 5	85	8 x 5	90		
	6 x 5	70								
220	6 x 5	90	8 x 5	90						
330	8 x 5	115								
470	8 x 5	100								

Note : * I. D x L : mm

* 2. Size : 6 x 5 Actually is 6.3 x 5

* 3. mA rms at 105°C, 120Hz

Miniature Size Aluminum Electrolytic Capacitors

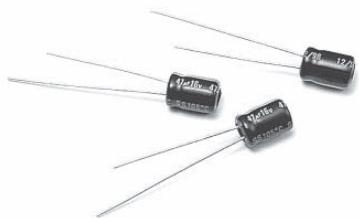

DESCRIPTION

This type is designed to meet the demand or equipments for greatly reduced size and thickness, such as: portable micro computer; disk driver; small calculator and audio equipement.

Application : Portable Micro Computer;
Disk Driver;
Small Calculator and Audio

Multiplier for Ripple Current


Frequency coefficient

Frequency (Hz)	50	120	300	1K	10K
0.1~47μF	0.75	1.00	1.20	1.30	1.50
100~330μF	0.75	1.00	1.10	1.15	1.20

Temperature coefficient

Temperature(°C)	65	85	105
Factor	1.70	1.30	1.00

DIAGRAM OF DIMENSIONS

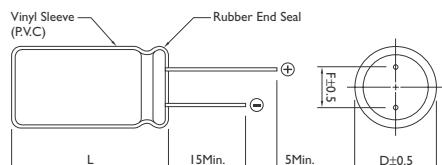

SS [For Super Miniature]

105°C Single-Ended Lead Aluminum Electrolytic Capacitors

ELECTRICAL CHARACTERISTICS

Operating Temperature : -40° ~ +105°C

Working Voltage : 6.3 ~ 63V

Rate Capacitance Range : 0.1 ~ 470μF

Capacitance Tolerance : -20 ~ +20%

DC Leakage Current (μA) : $I = 0.01CV$ (μA) or $3\mu A$ Whichever is greater:

(After 2 Minutes Application of DC Working Voltage at 25°C)

Dissipation Factor : at 120 Hz, 25°C

WV (V)	6.3	10	16	25	35	50	63
D.F (%)	24	20	17	15	12	10	8

Load Life : 1000 Hours at 105°C Assured with Full Rated Maximum Ripple Current Applied

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement

(c) Leakage Current : Not Exceed the Initial Requirement

Shelf Life : 500 Hours, No Voltage Applied, at 105°C


(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement

(c) Leakage Current : Not Exceed 200% of Initial Requirement

Dimensions : mm

Rubber Stand-off

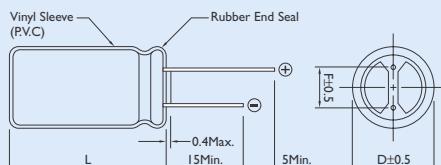

$L \leq 12$ $L + 1.5\text{Max.}$
 $13 \leq L \leq 15$ $L^{+1.0}_{-0.5}$
 $L \geq 16$ $L + 2.0\text{Max.}$

$D\varnothing$	F	$d\varnothing$
4.0	1.5	0.45
5.0	2.0	
6.3	2.5	
8.0	3.5	0.5



CASE SIZE & PERMISSIBLE RIPPLE CURRENT OF STANDARD PRODUCTS

CAP. (μF) RATED VOLTAGE WV

CAP. (μF)	6.3 Ripple		10 Ripple		16 Ripple		25 Ripple		35 Ripple		50 Ripple		63 Ripple	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.1											4 x 7	1	4 x 7	1
0.22											4 x 7	2	4 x 7	2
0.33											4 x 7	3	4 x 7	4
0.47											4 x 7	5	4 x 7	6
0.68											4 x 7	6		
1.0											4 x 7	10	4 x 7	13
2.2					4 x 7	7					4 x 7	19	4 x 7	21
3.3					4 x 7	13					4 x 7	24	4 x 7	26
4.7					4 x 7	19	4 x 7	24	4 x 7	24	4 x 7	29	4 x 7	26
									5 x 7	24	5 x 7	31	6 x 7	33
10			4 x 7		4 x 7	29	4 x 7	33	4 x 7	34	4 x 7	37	5 x 7	42
									5 x 7	35	5 x 7	45	6 x 7	50
									6 x 7	35	6 x 7	45		
22	4 x 7	37	4 x 7	31	4 x 7	36	4 x 7	43	5 x 7	48	6 x 7	65		
				5 x 7	38	5 x 7	44	5 x 7	51	6 x 7	57			
									6 x 7	53				
33	5 x 7	42	4 x 7	39	4 x 7	50	5 x 7	55	6 x 7	70				
				5 x 7	47	5 x 7	57	6 x 7	55					
47	4 x 7	46	4 x 7	50	5 x 7	75	5 x 7	67	6 x 7	81	8 x 7			
	5 x 7	55	5 x 7	60	6 x 7	77	6 x 7	79						
				6 x 7	60									
68						5 x 7	84							
100	5 x 7	75	5 x 7	85	5 x 7	94	6 x 7	120	8 x 7					
	6 x 7	90	6 x 7	100	6 x 7	110	8 x 7	120						
150						6 x 7	120							
220	6 x 7	130	6 x 7	135	8 x 7	140								
					8 x 9	140								
330	8 x 7	140	8 x 7		8 x 9	155								
470	8 x 7		8 x 9	165										

Note : * I. D x L : mm

* 2. Size : 6 x 7 Actually is 6.3 x 7

* 3. mA rms at 105°C, 120Hz

Miniature Size Aluminum Electrolytic Capacitors



DESCRIPTION

Lower-cost capacitors expressly intended for high density printed circuit board.

Very High Volumetric Efficiency

Ideally suited for general-purpose applications, decoupling, by pass, and filtering circuit in entertainment electronics.

Feature High CV Product with Moderate Cost

Multiplier for Ripple Current


Frequency coefficient

Frequency (Hz)	120	300	1K	10K~100K
6.3~100V Below~68μF	1.00	1.20	1.30	1.50
6.3~100V 100~680μF	1.00	1.10	1.15	1.20
6.3~110V 1000~22000μF	1.00	1.05	1.10	1.15
160~450V Below~220μF	1.00	1.25	1.40	1.40
160~450V 220μF Above	1.00	1.10	1.13	1.13

Temperature coefficient

Temperature(°C)	50	70	85
Factor	1.30	1.15	1.00

DIAGRAM OF DIMENSIONS

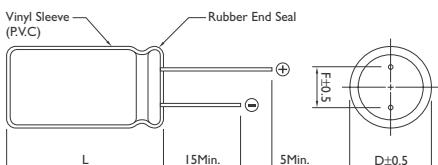

SK [For General]

85°C Single-Ended Lead Aluminum Electrolytic Capacitors

ELECTRICAL CHARACTERISTICS

Operating Temperature : -40° ~ +85°C / -25° ~ +85°C

Working Voltage : 6.3 ~ 100V / 160 ~ 450V

Rate Capacitance Range : 0.1 ~ 22000μF / 0.47 ~ 470μF

Capacitance Tolerance : -20 ~ +20%

DC Leakage Current (μA) : 0.01 CV or 3 μA / 0.03 CV + 10 Whichever is greater.

(After 2 Minutes Application of DC Working Voltage at 25°C)

Dissipation Factor : at 120Hz, 25°C

WV (V) :	6.3	10	16	25	35	50	63	100	160 ~ 250	350 ~ 450
D.F (%) :	22	19	16	14	12	10	9	8	15	20

For capacitor whose capacitance exceeds 1000μF. The value of DF(%) is increased by 2% for every addition of 1000μF.

Load Life : 2000 Hours at 85°C Assured with Full Rated Maximum Ripple Current Applied

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement

(c) Leakage Current : Not Exceed the Initial Requirement


Shelf Life : 1000 Hours, No Voltage Applied at 85°C

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement

(c) Leakage Current : Not Exceed 200% of Initial Requirement

Rubber Stand-off

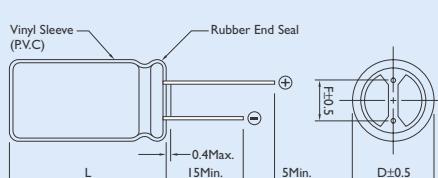

L ≤ 12 L + 1.5Max.
13 ≤ L ≤ 15 L ^{+1.0} _{-0.5}
L ≥ 16 L + 2.0Max.

Dimensions : mm

Dø	F	dø
4.0	1.5	0.45
5.0	2.0	0.5
6.0	2.5	
8.0	3.5	
10.0	5.0	0.6
12.0		
13.0		
16.0	7.5	0.8
18.0		
22.0	10.0	0.8



CASE SIZE & PERMISSIBLE RIPPLE CURRENT OF STANDARD PRODUCTS

CAP. (μF) RATED VOLTAGE WV

CAP. (μF)	6.3		10		16		25		35		50		63	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.1											5 x 11	1		
0.22											5 x 11	2		
0.33											5 x 11	3	5 x 11	3
0.47											5 x 11	5	5 x 11	5
0.68											5 x 11	7		
1.0											5 x 11	10	5 x 11	10
2.2											5 x 11	23	5 x 11	29
3.3											5 x 11	35	5 x 11	40
4.7			5 x 11	20	5 x 11	25	5 x 11	30	5 x 11	35	5 x 11	40	5 x 11	45
6.8											5 x 11	50		
10			5 x 11	35	5 x 11	40	5 x 11	50	5 x 11	60	5 x 11	65	5 x 11	70
15					5 x 11	50					5 x 11	80		
22	5 x 11	35	5 x 11	55	5 x 11	75	5 x 11	90	5 x 11	95	5 x 11	100	5 x 11	95
											6 x 11	115		
33	5 x 11	55	5 x 11	80	5 x 11	110	5 x 11	115	5 x 11	120	5 x 11	105	6 x 11	130
											6 x 11	125	8 x 11	140
47	5 x 11	75	5 x 11	95	5 x 11	130	5 x 11	135	5 x 11	120	6 x 11	140	8 x 11	190
											6 x 11	140	8 x 11	130
68					5 x 11	150	5 x 11	135					8 x 11	190
100	5 x 11	130	5 x 11	180	5 x 11	165	6 x 11	160	6 x 11	185	8 x 11	230	8 x 11	190
					6 x 11	185					8 x 11	230	10 x 12	300
220	5 x 11	200	5 x 11	180	6 x 11	260	8 x 11	290	10 x 12	370	10 x 12	380	10 x 15	410
	6 x 11	240			8 x 11	320	10 x 12	340	10 x 15	370	10 x 15	440	10 x 19	490
330	6 x 11	260	6 x 11	265	6 x 11	290	8 x 11	315	10 x 12	420	10 x 15	490	10 x 19	540
	8 x 11	300	8 x 11	330	8 x 11	360	8 x 15	380	10 x 15	490	10 x 19	580	13 x 20	680
							10 x 12	420						
470	6 x 11	330	6 x 11	320	8 x 11	400	8 x 15	420	10 x 15	430	10 x 19	610	13 x 20	755
	8 x 11	380	8 x 11	440	10 x 12	470	10 x 12	460	10 x 19	510	13 x 20	760	13 x 25	880
							10 x 15	540	13 x 12	640			16 x 25	8820
680	8 x 11	410	10 x 12	460	10 x 12	510	10 x 15	540	13 x 20	705			13 x 25	965
					10 x 15	565	10 x 19	595	13 x 25	780				
1000	8 x 11	460	10 x 12	580	10 x 15	630	10 x 19	760	13 x 20	950	13 x 25	1100	16 x 25	1310
	10 x 12	580	10 x 15	630	10 x 19	790	12 x 16	760	13 x 25	1100	16 x 25	1350	16 x 32	1550
1500				10 x 19	700				16 x 25	1240			18 x 36	2090
			10 x 19	840	10 x 19	880	10 x 25	925	13 x 25	1300	16 x 25	1600	16 x 36	1850
2200	13 x 20	1050	13 x 20	1100	13 x 25	1350	16 x 25	1550	16 x 32	1800	18 x 36	2090	22 x 35	2200
						18 x 20	1550							
3300	10 x 19	1000	13 x 20	1250	13 x 25	1400	16 x 25	1660	16 x 36	1970	18 x 36	2170	22 x 40	2500
					16 x 25	1700	16 x 32	1950	18 x 36	2220	18 x 40	2400		
4700	13 x 20	1300	13 x 25	1500	16 x 25	1800	16 x 32	1950	18 x 36	2400	22 x 35	2240		
			16 x 25	1800	16 x 32	2100	18 x 36	2360			22 x 40	2500		
6800	16 x 25	1900	16 x 25	1900	16 x 32	1980	18 x 36	2550	22 x 40	2600				
			16 x 32	2150	16 x 36	2200								
10000	16 x 25	1900	18 x 36	2500	18 x 36	2700	22 x 40	2800						
	16 x 32	2250												
15000	16 x 36	2500	18 x 36	2950	22 x 40	3150	22 x 40	3200						
22000	18 x 40	3650	22 x 40	3700	22 x 40	3800								

Note : * I. D x L : mm

* 2. mA rms at 85°C, 120Hz



CASE SIZE & PERMISSIBLE RIPPLE CURRENT OF STANDARD PRODUCTS

CAP. (μF)	RATED VOLTAGE WV														
	100		160		200		250		350		400		450		
Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple		
0.22	5 x 11	5													
0.47	5 x 11	10	5 x 11	12	5 x 11	14	5 x 11	14	5 x 11	14	6 x 11	14	6 x 11	14	
1.0	5 x 11	21	5 x 11	17	5 x 11	19	5 x 11	17	6 x 11	19	6 x 11	16	8 x 11	19	
		6 x 11	17			6 x 11	19			8 x 11					
2.2	5 x 11	30	6 x 11	26	6 x 11	22	6 x 11	24	8 x 11	33	8 x 11	26	10 x 12	33	
			8 x 11	27	8 x 11	30	8 x 11	30	10 x 10	33	10 x 12	33			
3.3	5 x 11	45	6 x 11	30	6 x 11	30	8 x 11	30	8 x 11	33	10 x 12	40	10 x 15	42	
			8 x 11	35	8 x 11	37	10 x 12	38	10 x 12	39					
4.7	5 x 11	50	6 x 11	32	8 x 11	36	8 x 11	36	10 x 12	39	8 x 15	33	10 x 15	50	
			8 x 11	40	10 x 12	45	10 x 12	45	10 x 15	45	10 x 15	45	10 x 19	50	
6.8	5 x 11	55					8 x 11	40					10 x 15	50	
								10 x 12	50				10 x 19	56	
10	5 x 11	65	8 x 11	50	10 x 12	57	10 x 15	70	10 x 15	70	10 x 15	50	10 x 19	56	
	6 x 11	75	10 x 12	65	10 x 15	70	10 x 19	70	10 x 19	70	10 x 19	56	13 x 20	60	
			10 x 15	65					13 x 20	70	13 x 20	70	13 x 25	75	
15		8 x 11	93				10 x 19	75	10 x 19	90					
								13 x 20	90						
22		6 x 11	105	10 x 15	110	10 x 15	120	10 x 19	130	13 x 20	130	13 x 20	100	16 x 20	100
		8 x 11	130	10 x 19	110					13 x 25	110	13 x 25	110	16 x 25	110
										16 x 25	130	16 x 25	130	16 x 32	130
33		8 x 11	140	10 x 19	150	10 x 19	150	13 x 20	140	13 x 25	170	13 x 25	140	16 x 25	145
		10 x 12	170					13 x 25	160	16 x 25	170	16 x 20	145	16 x 32	160
									16 x 25	170		16 x 25	170	16 x 36	180
47		10 x 12	190	12 x 16	145	13 x 20	160	13 x 25	210	16 x 25	220	16 x 25	180	18 x 36	200
		10 x 15	230	12 x 25	180	13 x 25	190	16 x 25	210			16 x 32	220	18 x 40	230
				13 x 20	180							16 x 36	220		
68		10 x 15	280			13 x 25	230	16 x 25	210			16 x 32	220	18 x 32	265
		10 x 19	400	13 x 25	250	16 x 25	330	16 x 32	310	16 x 36	320	18 x 36	360	22 x 40	370
100				16 x 25	300					18 x 36	360	18 x 32	360		
150		13 x 20	500					18 x 40	410			18 x 40	410		
220		13 x 25	710	16 x 32	450	18 x 25	485	18 x 36	540						
				16 x 36	510	18 x 32	540	18 x 40	600						
					18 x 36	600									
330		13 x 25	720	18 x 36	540	16 x 40	710	18 x 40	600						
		16 x 25	860	18 x 40	600	16 x 45	750								
						18 x 32	685								
						18 x 36	725								
						18 x 40	800								
470		13 x 40	1100	22 x 40	900	18 x 40	750								
		16 x 25	1100			22 x 35	1000								
680		16 x 36	1260												
1000		18 x 40	1350												
2200		22 x 35	1680												
		22 x 40	2300												

Note : * I. D x L : mm

* 2. mA rms at 85°C, 120Hz

SE-K [For General]

105°C Single-Ended Lead Aluminum Electrolytic Capacitors Rated Voltage up to 450V

Miniature Size Aluminum Electrolytic Capacitors

ELECTRICAL CHARACTERISTICS

Operating Temperature : -40° ~ +105°C / -25° ~ +105°C

Working Voltage : 6.3 ~ 250V / 350 ~ 450V

Rate Capacitance Range : 0.47 ~ 15000μF / 0.47 ~ 150μF

Capacitance Tolerance : -20 ~ +20%

DC Leakage Current (μA) : $I = 0.01CV + 3 / 0.03CV + 10$

(After 2 Minutes Application of DC Working Voltage at 25°C)

Dissipation Factor : at 120 Hz, 25°C

WV (V)	6.3	10	16	25	35	50	63	80	100	160 ~ 250	350 ~ 450
D.F (%)	26	22	18	16	14	12	10	10	10	15	20

For capacitor whose capacitance exceeds 1000 μF. The value of DF(%) is increased by 2% for every addition of 1000 μF.

Load Life : 1000 Hours at Assured with Full Rated Maximum Ripple Current Applied

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement

(c) Leakage Current : Not Exceed the Initial Requirement

Shelf Life : 500 Hours, No Voltage Applied

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement

(c) Leakage Current : Not Exceed 200% of Initial Requirement



DESCRIPTION

Lower-cost capacitors expressly intended for high density printed circuit board.

Very High Volumetric Efficiency

Ideally suited for general-purpose applications, coupling, decoupling, bypass, and filtering circuit in entertainment electronics.

Feature High CV Product with Moderate Cost

Multiplier for Ripple Current

Frequency coefficient

Frequency (Hz)	120	300	1K	10K~100K
6.3~100V Below~68μF	1.00	1.20	1.30	1.45
6.3~100V 100~680μF	1.00	1.10	1.15	1.25
6.3~110V 1000~22000μF	1.00	1.05	1.10	1.15
160~450V ALL Cap(μF)	1.00	1.05	1.10	1.50

Temperature coefficient



Temperature(°C)	65	85	105
Factor	1.80	1.40	1.00

Dimensions : mm

DIAGRAM OF DIMENSIONS

Dø	F	dø
4.0	1.5	0.45
5.0	2.0	0.5
6.0	2.5	
8.0	3.5	
10.0	5.0	0.6
12.0		
13.0		
16.0	7.5	0.8
18.0		
22.0	10.0	0.8

Rubber Stand-off

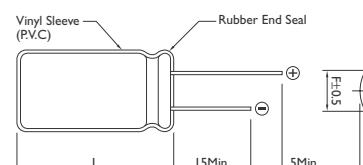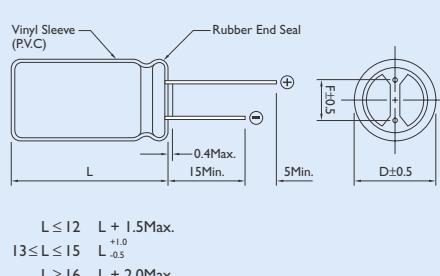



CASE SIZE & PERMISSIBLE RIPPLE CURRENT OF STANDARD PRODUCTS

CAP. (μF) RATED VOLTAGE WV

CAP. (μF)	RATED VOLTAGE WV													
	6.3		10		16		25		35		50		63	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.47											5 x 11	7	5 x 11	8
1.0											5 x 11	12	5 x 11	13
2.2											5 x 11	18	5 x 11	20
3.3											5 x 11	25	5 x 11	27
4.7							5 x 11	20	5 x 11	25	5 x 11	30	5 x 11	34
6.8							5 x 11	25	5 x 11	30	5 x 11	32	5 x 11	37
10					5 x 11	25	5 x 11	30	5 x 11	40	5 x 11	50	5 x 11	55
15					5 x 11	40	5 x 11	45	5 x 11	50	5 x 11	60	5 x 11	65
22			5 x 11	45	5 x 11	55	5 x 11	60	5 x 11	65	5 x 11	75	6 x 11	90
33			5 x 11	60	5 x 11	70	5 x 11	75	5 x 11	85	6 x 11	105	6 x 11	110
	5 x 11	60	5 x 11	75	5 x 11	85	5 x 11	90	5 x 11	95	6 x 11	100	8 x 11	155
47											6 x 11	115	8 x 11	125
68	5 x 11	75	5 x 11	80	5 x 11	100	6 x 11	125	8 x 11	130	8 x 11	159	10 x 12	198
100	5 x 11	100	5 x 11	110	5 x 11	110	6 x 11	145	6 x 11	150	8 x 11	160	8 x 15	230
					6 x 11	135			8 x 11	190	10 x 12	210	10 x 12	260
150	5 x 11	120	5 x 11	110	8 x 11	180	8 x 11	200	10 x 12	240	10 x 12	289	10 x 15	330
	5 x 11	140	6 x 11	180	6 x 11	180	8 x 11	200	8 x 11	230	10 x 12	340	10 x 15	400
220	6 x 11	165			8 x 11	235	10 x 12	250	8 x 15	280	10 x 15	400	10 x 19	460
	6 x 11	160	6 x 11	205	8 x 11	285	8 x 11	265	8 x 15	345	10 x 15	450	10 x 19	520
330	8 x 11	200	8 x 11	255			8 x 15	320	8 x 20	420	10 x 19	535	13 x 20	650
							10 x 12	355	10 x 12	380	10 x 15	440		
470	6 x 11	220	6 x 11	245	8 x 11	310	8 x 15	365	10 x 15	415	10 x 19	580	13 x 20	700
	8 x 11	280	8 x 11	305	8 x 15	360	10 x 12	400	10 x 19	490	13 x 20	730	13 x 25	800
680	8 x 11	255	8 x 11	335	10 x 12	455	10 x 19	650	13 x 20	730	13 x 25	860	13 x 25	840
	10 x 12	320	8 x 15	385	10 x 15	530							16 x 25	1000
			10 x 12	420										
1000	8 x 11	370	8 x 11	390	8 x 20	600	10 x 19	680	13 x 20	850	13 x 25	930	16 x 25	1020
	10 x 12	470	8 x 15	450	10 x 15	590	12 x 20	775	13 x 25	995	16 x 25	1110	16 x 32	1200
1500	10 x 15	600	10 x 19	750	10 x 19	680	13 x 25	1020	13 x 25	935	16 x 32	1350	16 x 32	1300
					13 x 20	860	16 x 25	1110	16 x 25	1110	16 x 36	1450		
2200	10 x 19	740	10 x 19	800	10 x 25	895	13 x 25	1030	16 x 25	1230	16 x 36	1360	18 x 36	1455
	13 x 20	930	13 x 20	1010	12 x 25	1040	16 x 25	1230	16 x 32	1450	18 x 36	1530		
					13 x 20	990								
					13 x 25	1150								
3300	10 x 19	880	10 x 25	950	13 x 25	1140	13 x 25	1035	16 x 36	1470	18 x 36	1540		
	13 x 20	1100	10 x 30	1090	16 x 25	1350	16 x 25	1230	18 x 36	1660	18 x 40	1700		
							16 x 32	1450						
4700	13 x 25	1100	13 x 25	1190	16 x 25	1330	16 x 32	1420	18 x 36	1580	22 x 35	1900		
	16 x 25	1320	16 x 25	1410	16 x 32	1560	18 x 36	1690	18 x 40	1750				
6800	13 x 25	1250	16 x 25	1370	16 x 36	1590	18 x 36	1850	22 x 40	1885				
	16 x 25	1490	16 x 32	1610	16 x 40	1670								
					18 x 36	1790								
10000	16 x 25	1560	16 x 36	1760	18 x 36	2100								
	16 x 32	1830	18 x 36	1980										
15000	18 x 36	2280	18 x 40	1960										

Note : * I. D x L : mm

* 2. mA rms at 85°C, 120Hz



CASE SIZE & PERMISSIBLE RIPPLE CURRENT OF STANDARD PRODUCTS

CAP. (μF) RATED VOLTAGE WV

CAP. (μF)	100		160		200		250		350		400		450	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.47	5 x 11	10	5 x 11	12	5 x 11	14	5 x 11	14	5 x 11	14	6 x 11	14	6 x 11	14
1.0	5 x 11	15	5 x 11	17	5 x 11	19	6 x 11	19	6 x 11	20	6 x 11	16	8 x 11	20
2.2	5 x 11	22	6 x 11	25	6 x 11	22	6 x 11	23	8 x 11	35	8 x 11	28	10 x 12	35
3.3	5 x 11	29	6 x 11	30	6 x 11	32	8 x 11	33	8 x 11	37	8 x 11	38	10 x 15	54
4.7	5 x 11	37	6 x 11	34	8 x 11	40	8 x 11	41	10 x 12	47	8 x 15	45	10 x 15	60
6.8	5 x 11	46	10 x 12	54	10 x 12	60	8 x 15	57	10 x 15	65	10 x 15	60	10 x 19	80
10	5 x 11	55	8 x 11	56	10 x 12	69	10 x 15	88	10 x 15	95	10 x 15	65	13 x 20	85
15	6 x 11	65	10 x 12	70	10 x 15	80					10 x 19	77	13 x 25	100
	8 x 11	82	10 x 15	90	10 x 15	110	10 x 15	120	10 x 19	140	10 x 19	100	13 x 20	160
											13 x 20	125	13 x 25	150
22	8 x 11	115	8 x 20	125	10 x 15	140	10 x 19	155	13 x 20	165	13 x 20	150	13 x 25	125
			10 x 15	130							13 x 20	175	16 x 25	150
33	8 x 11	120	10 x 19	180	10 x 19	190	13 x 20	170	13 x 25	220	13 x 25	190	16 x 25	190
	10 x 12	160					13 x 25	200			16 x 20	195	16 x 36	240
47	10 x 12	180	13 x 20	270	13 x 20	240	13 x 25	330	16 x 25	340	16 x 25	280	16 x 36	300
	10 x 15	210			13 x 25	290					16 x 32	315	18 x 40	360
68	10 x 15	241	13 x 25	300	13 x 25	330	16 x 25	350	16 x 32	370	16 x 32	320	18 x 32	305
											16 x 36	335	22 x 40	400
100	10 x 19	385	13 x 25	330	13 x 25	340	16 x 32	430	18 x 36	460	16 x 36	425		
			16 x 25	400	16 x 25	410					18 x 32	430		
120											18 x 36	480		
150	13 x 25	414	16 x 32	435	16 x 36	450	18 x 40	460	22 x 40	480	22 x 40	450		
220	13 x 25	590	16 x 32	550	18 x 32	520	22 x 40	680						
			16 x 36	620	18 x 36	580								
				18 x 40	650									
330	13 x 25	600	18 x 36	770	18 x 36	705								
	16 x 25	720	18 x 40	850	18 x 40	780								
					22 x 40	920								
470	16 x 25	740	22 x 40	980										
680	16 x 32	875												
1000	16 x 36	1200												
	18 x 40	1340												
	22 x 40	1500												

Note : * I. D x L : mm

* 2. mA rms at 105°C, 120Hz

Miniature Size Aluminum Electrolytic Capacitors



DESCRIPTION

Long life for 2,000 hours at 105°C, ideally suited for high quality and high reliability applications.

Feature High CV Product

Multiplier for Ripple Current


Frequency coefficient

Frequency (Hz)	120	300	1K	10K~100K
6.3~100V Below~68μF	1.00	1.30	1.57	2.00
6.3~100V 100~470μF	1.00	1.23	1.34	1.50
6.3~100V 471~22000μF	1.00	1.10	1.13	1.15
160~450V ALL Cap(μF)	1.00	1.25	1.40	1.60

Temperature coefficient

Temperature(°C)	65	85	105
Factor	1.70	1.40	1.00

DIAGRAM OF DIMENSIONS

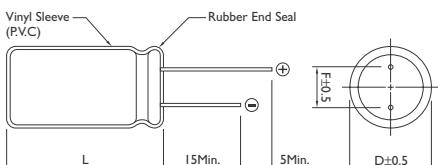

SH [For General]

105°C Single-Ended Lead Aluminum Electrolytic Capacitors
for the Rated Voltage up to 450V

ELECTRICAL CHARACTERISTICS

Operating Temperature : -40° ~ +105°C / -25° ~ +105°C

Working Voltage : 6.3 ~ 100V / 160 ~ 450V

Rate Capacitance Range : 0.47 ~ 15000μF / 0.47 ~ 470μF

Capacitance Tolerance : -20 ~ +20%

DC Leakage Current (μA) : 0.01CV +3 / 0.03CV+10

(After 2 Minutes Application of DC Working Voltage at 25°C)

Dissipation Factor : at 120 Hz, 25°C

WV (V) :	6.3	10	16	25	35	50	63 ~ 100	100 ~ 250	250 ~ 350	350 ~ 450
D.F (%) :	26	22	18	16	14	12	10	15	20	20

For capacitor whose capacitance exceeds 1000μF. The value of DF(%) is increased by 2% for every addition of 1000μF.

WV (V) :	6.3	10	16	25	35 ~ 100	100 ~ 250	250 ~ 350
Impedance :	Z - 25°C / Z + 25°C	4	3	2	2	4	4
	Z - 40°C / Z + 20°C	8	6	4	3	6	8

Load Life : 2000 Hours at 105°C Assured with Full Rated Maximum Ripple Current Applied

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement

(c) Leakage Current : Not Exceed the Initial Requirement


Shelf Life : 1000 Hours, No Voltage Applied

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement

(c) Leakage Current : Not Exceed 200% of Initial Requirement

Rubber Stand-off

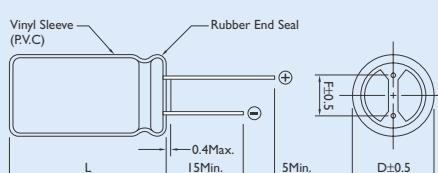

L ≤ 12 L + 1.5Max.
13 ≤ L ≤ 15 L + 1.0
L ≥ 16 L + 2.0Max.

Dimensions : mm

Dø	F	dø
4.0	1.5	0.45
5.0	2.0	0.5
6.0	2.5	
8.0	3.5	
10.0	5.0	0.6
12.0		
13.0		
16.0	7.5	0.8
18.0		
22.0	10.0	0.8



CASE SIZE & PERMISSIBLE RIPPLE CURRENT OF STANDARD PRODUCTS

CAP. (μF) RATED VOLTAGE WV

CAP. (μF)	RATED VOLTAGE WV												
	6.3		10		16		25		35		50		
Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.47										5 x 11	7	5 x 11	8
1.0										5 x 11	12	5 x 11	12
2.2										5 x 11	18	5 x 11	20
3.3										5 x 11	25	5 x 11	27
4.7										5 x 11	30	5 x 11	34
6.8										5 x 11	30	5 x 11	37
10								5 x 11	44	5 x 11	50	5 x 11	55
15								5 x 11	50	5 x 11	50	5 x 11	65
22							5 x 11	60	5 x 11	65	5 x 11	75	6 x 11 90
33						5 x 11	70	5 x 11	75	5 x 11	85	6 x 11	105
47			5 x 11	75	5 x 11	85	5 x 11	90	6 x 1	115	8 x 11	125	8 x 11 155
68			5 x 11	80	5 x 11	100	6 x 11	125	8 x 11	130	8 x 11	159	10 x 12 198
100	5 x 11	100	5 x 11	110	6 x 11	135	6 x 11	145	8 x 11	190	10 x 12	210	10 x 12 260
150	5 x 11	120	6 x 11	130	8 x 11	180	8 x 11	200	10 x 12	240	10 x 12	289	10 x 15 330
220	6 x 11	165	6 x 11	180	6 x 11	180	10 x 12	250	10 x 12	315	10 x 15	400	10 x 19 465
					8 x 11	235							
330	8 x 11	200	8 x 11	255	10 x 12	285	10 x 12	355	10 x 15	440	10 x 19	535	13 x 20 650
470	8 x 11	280	8 x 11	305	8 x 11	315	10 x 15	470	10 x 19	460	13 x 20	730	13 x 25 800
					10 x 12	395			13 x 20	580			
680	10 x 12	320	10 x 12	420	10 x 15	530	10 x 19	650	13 x 20	730	13 x 25	860	16 x 25 1000
1000	10 x 12	470	10 x 12	490	10 x 19	700	13 x 20	855	13 x 25	995	16 x 25	1110	16 x 32 1200
			10 x 15	570									
1500	10 x 15	600	10 x 19	750	13 x 20	860	13 x 25	1020	16 x 25	1110	16 x 32	1350	18 x 40 1450
2200	13 x 20	930	10 x 19	800	13 x 25	1150	16 x 25	1230	16 x 32	1450	18 x 36	1530	
			13 x 20	1010									
3300	13 x 20	1100	13 x 25	1220	16 x 25	1350	16 x 32	1450	18 x 36	1660			
4700	16 x 25	1320	16 x 25	1410	16 x 25	1330	18 x 36	1690					
					16 x 32	1560							
6800	16 x 25	1490	16 x 32	1610	18 x 36	1790							
10000	16 x 32	1830	18 x 36	1980									
15000	18 x 36	2280											

Note : * I. D x L : mm

* 2. mA rms at 105°C, 120Hz



CASE SIZE & PERMISSIBLE RIPPLE CURRENT OF STANDARD PRODUCTS

CAP. (μF) RATED VOLTAGE WV

CAP. (μF)	100		160		200		250		350		400		450	
	Size	Ripple												
0.47	5 x 11	10	5 x 11	12	5 x 11	12	5 x 11	12	6 x 11	14	6 x 11	14	6 x 11	16
1.0	5 x 11	15	5 x 11	17	6 x 11	17	6 x 11	17	8 x 11	20	8 x 11	20	8 x 11	22
2.2	5 x 11	22	6 x 11	25	6 x 11	25	8 x 11	29	10 x 12	35	10 x 12	35	10 x 12	37
3.3	5 x 11	29	8 x 11	36	8 x 11	36	10 x 12	42	10 x 15	47	10 x 12	42	10 x 15	51
											10 x 15	49		
4.7	5 x 11	37	8 x 11	43	10 x 12	50	10 x 12	52	10 x 15	55	10 x 15	57	10 x 15	59
6.8	5 x 11	46	10 x 12	54	10 x 12	60	10 x 12	62	10 x 19	65	10 x 15	67	13 x 20	69
10	6 x 11	65	10 x 12	70	10 x 15	80	10 x 15	75	13 x 20	95	10 x 19	75	13 x 25	99
							10 x 19	88			13 x 20	97		
15	8 x 11	82	10 x 15	90	10 x 19	110	13 x 20	120	13 x 20	140	13 x 25	145	16 x 25	150
	8 x 11	115	10 x 15	130	10 x 15	140	13 x 20	130	16 x 25	165	13 x 20	120	16 x 25	145
22							13 x 25	155			13 x 25	140	16 x 32	175
											16 x 25	170		
33	10 x 12	160	13 x 20	180	13 x 20	160	13 x 25	200	16 x 32	195	16 x 25	190	18 x 36	250
					13 x 25	190					16 x 32	230		
	10 x 15	210	13 x 25	250	13 x 20	220	16 x 25	270	16 x 36	210	16 x 25	200	18 x 40	350
47					13 x 25	260			18 x 36	240	16 x 32	250		
											18 x 36	300		
68	10 x 15	241	13 x 25	270	16 x 25	280	16 x 32	300	16 x 36	320	18 x 36	325	22 x 40	380
100	10 x 19	305	16 x 25	390	16 x 32	400	18 x 36	440	18 x 40	300	18 x 36	290		
	13 x 20	385							22 x 40	360	22 x 40	365		
120											18 x 36	320		
											18 x 40	350		
150	13 x 25	414	16 x 32	435	16 x 36	450	18 x 40	600	22 x 40	480	22 x 40	465		
220	13 x 25	495	16 x 36	700	18 x 36	675	22 x 40	800						
	16 x 25	590			18 x 40	750								
330	16 x 25	720	18 x 40	850	18 x 40	780								
					22 x 40	920								
470	16 x 32	875	22 x 40	980										
680	16 x 36	1200												

Note : * I. D x L : mm

* 2. mA rms at 105°C, 120Hz

SG [Electronic Ballast]

105°C Single-Ended Lead Aluminum Electrolytic Capacitors

Miniature Size Aluminum Electrolytic Capacitors

ELECTRICAL CHARACTERISTICS

Operating Temperature : -40 ~ +105°C / -25 ~ +105°C

Working Voltage : 160 ~ 400V / 450V

Rate Capacitance Range : 4.7 ~ 330μF / 3.3~100μF

Capacitance Tolerance : -20 ~ +20%

DC Leakage Current (μA) : $I = 0.06 CV + 10$

(After 2 Minute Application of DC Working Voltage at 25°C)

Dissipation Factor : at 120 Hz, 25°C

WV (V) : 160 200 250 350 400 450

D.F (%) : 15 15 15 20 24 24

For capacitor whose capacitance exceeds 1000μF. The value of D.F(%) is increased by 2% for every addition of 1000μF.

Load Life : 5000 Hours at Assured with Full Rated Maximum Ripple Current Applied

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement


(c) Leakage Current : Not Exceed the Initial Requirement

Shelf Life : Hours, No Voltage Applied

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200 % of Initial Requirement

(c) Leakage Current : Not Exceed 200% of Initial Requirement



Multiplier for Ripple Current

Frequency coefficient

Frequency (Hz)	50,60	120	300	1K	10K~100K
6.3~100V Below~68μF	0.80	1.00	1.20	1.40	1.6


Temperature coefficient

Temperature(°C)	65	85	105
Factor	1.70	1.40	1.00


DIAGRAM OF DIMENSIONS

Dø	F	dø
4.0	1.5	0.45
5.0	2.0	0.5
6.0	2.5	
8.0	3.5	
10.0	5.0	0.6
12.0		
13.0		
16.0	7.5	0.8
18.0		
22.0	10.0	0.8

Rubber Stand-off

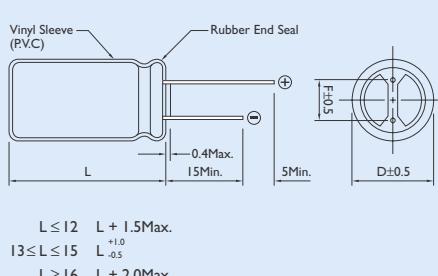

Dimensions : mm

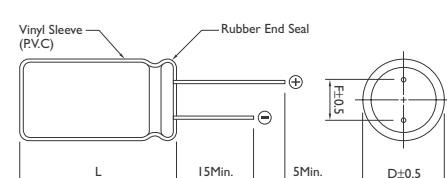



CASE SIZE OF STANDARD PRODUCTS

CAP. (μF)	RATED VOLTAGE								
	160			200			250		
SIZE	Ripple	Impedance	SIZE	Ripple	Impedance	SIZE	Ripple	Impedance	
10				*10 x 15	100	2.50	*10 x 15	85	4.10
							10 x 19	100	3.50
15				*10 x 15	80	5.00			
	10 x 19	160	1.52	10 x 19	160	1.50	*10 x 25	145	2.75
22							13 x 20	160	2.50
	10 x 19	210	1.30	*10 x 19	160	1.20	13 x 20	210	1.90
33					13 x 20	210	0.95		
	13 x 20	260	0.95	13 x 20	260	0.91	13 x 25	270	1.70
47							16 x 20	275	1.50
	13 x 25	360	0.60	13 x 25	360	0.60	16 x 25	380	0.80
68	16 x 20	430	0.55	16 x 20	430	0.55	18 x 20	375	0.90
	16 x 25	475	0.30	16 x 25	475	0.30	16 x 32	520	0.65
100	18 x 20	465	0.31	18 x 20	465	0.31	18 x 25	500	0.65
	16 x 32	650	0.22	18 x 25	650	0.27	18 x 32	650	0.45
150	18 x 25	625	0.24						
	16 x 32	750	0.22	18 x 32	780	0.22	18 x 40	820	0.35
220	18 x 25	725	0.24						
	18 x 32	960	0.22						
330									

Note : * I. D x L : mm

* 2. mA rms at 105°C, 100KHz

* 3. Impedance Spec : 100KHz / 25°C (Ω MAX)

* 4. Down Size : 3000Hrs



CASE SIZE OF STANDARD PRODUCTS

CAP. (μF)	RATED VOLTAGE								
	350			400			450		
SIZE	Ripple	Impedance	SIZE	Ripple	Impedance	SIZE	Ripple	Impedance	
3.3							10 x 19	60	6.50
4.7			*10 x 15	60	3.50	13 x 20	80	3.60	
6.8			*10 x 15	72	3.40	*10 x 19	90	3.40	
10	10 x 19	100	3.00	10 x 19	100	2.90	13 x 20	110	3.00
22	13 x 20	160	2.10	13 x 25	170	1.35	16 x 25	190	1.80
			16 x 20	200	1.00	18 x 20	200	2.20	
33	13 x 25	230	1.00	16 x 25	230	0.95	16 x 32	275	1.30
	16 x 20	250	0.91	18 x 20	250	0.91	18 x 25	280	1.20
47	16 x 25	300	0.75	16 x 32	300	0.75	18 x 32	340	1.00
	18 x 20	315	0.80	18 x 25	325	0.80			
68	16 x 32	400	0.50	18 x 36	420	0.49	18 x 40	460	0.80
	18 x 25	380	0.55						
100	18 x 32	530	0.40	18 x 40	545	0.34	22 x 40	580	0.60
150				22 x 40	650	0.30			

Note : * I. D x L : mm

* 2. mA rms at 105°C, 100KHz

* 3. Impedance Spec : 100KHz / 25°C (Ω MAX)

* 4. Down Size : 3000Hrs

Miniature Size Aluminum Electrolytic Capacitors



DESCRIPTION

High Temperature Load Life at 105°C for 3000~8000 Hours


Frequency coefficient

Rated voltage(V)	Freq.(Hz) Cap(μF)	50	120	300	1K	10K-
		-47	0.75	1.00	1.35	1.57
6.3~100V	100~470	0.80	1.00	1.23	1.34	1.50
	≥560	0.85	1.00	1.10	1.13	1.15
	160~450	0.47~220	0.80	1.00	1.25	1.40
	≥270	0.90	1.00	1.10	1.13	1.15

Temperature coefficient

Temperature(°C)	~55	60	70	85	105
Factor	2.23	2.17	2.00	1.75	1.00

DIAGRAM OF DIMENSIONS

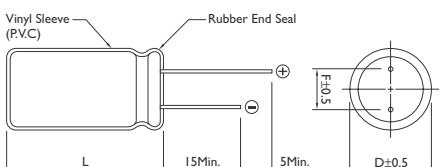

SA [High Ripple Current and Long load life]

105°C Single-Ended Lead Aluminum Electrolytic Capacitors

ELECTRICAL CHARACTERISTICS

Operating Temperature : -40° ~ +105°C -25° ~ +105°C

Working Voltage : 6.3 ~ 100V 160 ~ 450V

Rate Capacitance Range : 0.1 ~ 22000μF

Capacitance Tolerance : -20 ~ +20%

DC Leakage Current (μA) : I ≤ 0.03 CV or 4(μA) after 1 minute , I ≤ 0.04 CV +40(μA) after 1 minute
(Measurements shall be Made After a 1 Minute Charge at Rated Working Voltage)

Dissipation Factor : at 120 Hz, 25°C

WV (V) : 6.3 10 16 25 35 50 63 100 160 200 250 315 400 450 --
D.F (%) : 28 24 20 16 14 12 10 8 5 4 3 3 2 2

For capacitor whose capacitance exceeds 1000μF. The value of D.F(%) is increased by 2% for every addition of 1000μF.

WV (V)	6.3	10	16	25	35	50	63	100
Impedance : Z - 25°C / Z + 20°C	5	4	3	2	2	2	2	2
Impedance : Z - 40°C / Z + 20°C	12	10	8	5	4	3	3	3

Load Life : At 105°C Assured with Full Rated Maximum Ripple Current Applied

ø5~ø6=3000 hours.

ø8~ø10=5000 hours.

>ø12=8000 hours.


- (a) Capacitance Change : Within 20% of Initial Value
- (b) Dissipation Factor : Not Exceed 200 % of Initial Requirement
- (c) Leakage Current : Not Exceed the Initial Requirement

Shelf Life : 1000 Hours, No Voltage Applied, at 105°C

- (a) Capacitance Change : Within 20% of Initial Value
- (b) Dissipation Factor : Not Exceed 200 % of Initial Requirement
- (c) Leakage Current : Not Exceed 200% of Initial Requirement

Dimensions : mm

Rubber Stand-off

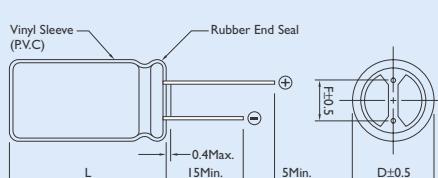

L ≤ 12 L + 1.5Max.
13 ≤ L ≤ 15 L + 1.0
L ≥ 16 L + 2.0Max.

Dø	F	dø
4.0	1.5	0.45
5.0	2.0	0.5
6.0	2.5	
8.0	3.5	
10.0	5.0	0.6
12.0		
13.0		
16.0	7.5	0.8
18.0		
22.0	10.0	0.8



CASE SIZE OF STANDARD PRODUCTS $D\phi \geq 6\text{mm}$ with Safety Vent at Can Bottom

CAP. (μF)	RATED VOLTAGE WV									
	6.3 Size	6.3 Ripple	10 Size	10 Ripple	16 Size	16 Ripple	25 Size	25 Ripple	35 Size	35 Ripple
0.1										
0.22										
0.33										
0.47										
1										
2.2										
3.3										
4.7							5 x 11	18	5 x 11	21
10					5 x 11	24	5 x 11	30	5 x 11	33
22	5 x 11	21	5 x 11	33	5 x 11	45	5 x 11	48	5 x 11	51
33	5 x 11	33	5 x 11	48	5 x 11	54	5 x 11	57	5 x 11	63
47	5 x 11	45	5 x 11	57	5 x 11	66	5 x 11	69	6 x 11	84
100	5 x 11	78	5 x 11	87	6 x 11	105	6 x 11	111	8 x 11	138
220	6 x 11	129	6 x 11	138	8 x 11	180	8 x 11	192	10 x 12	222
330	6 x 11	159	8 x 11	198	8 x 11	216	10 x 12	252	10 x 15	294
470	8 x 11	216	8 x 11	234	10 x 12	282	10 x 15	324	10 x 19	384
1000	10 x 12	342	10 x 15	378	10 x 19	474	12 x 20	570	13 x 25	660
2200	13 x 20	630	13 x 20	660	13 x 25	810	16 x 25	730	16 x 32	708
3300	13 x 20	750	13 x 25	840	16 x 25	1020	16 x 32	1170	18 x 36	1330
									22 x 30	1330
4700	16 x 25	1020	16 x 25	1080	16 x 32	260	18 x 36	1410	18 x 40	1490
							22 x 30	1410	22 x 35	1470
6800	16 x 25	1140	16 x 32	1290	18 x 36	1500	22 x 40	1550		
					22 x 30	1480				
10000	16 x 32	1350	18 x 36	1500	18 x 40	1580				
			22 x 30	1480	22 x 35	1560				
12000	16 x 36	1470	18 x 36	1560	22 x 40	1640				
			22 x 30	1530						
15000	18 x 36	1508	18 x 40	1632						
	22 x 30	1590	22 x 35	1600						
18000	18 x 40	1650	22 x 40	1710						
	22 x 35	1650								
22000	22 x 40	1710								

Note : * I. D x L : mm

* 2. mA rms at 105°C, 120Hz



CASE SIZE OF STANDARD PRODUCTS Dø ≥ 6mm with Safety Vent at Can Bottom

CAP. (µF)	RATED VOLTAGE W/V									
	50 Ripple		63 Ripple		100 Ripple		160 Ripple		200 Ripple	
Size	Size	Size	Size	Size	Size	Size	Size	Size	Size	Size
0.1	5 x 11	1.1			5 x 11	1.1				
0.22	5 x 11	2.3			5 x 11	2.3				
0.33	5 x 11	3.5			5 x 11	3.5				
0.47	5 x 11	5			5 x 11	5	6 x 11	7.2	6 x 11	7.2
1	5 x 11	10			5 x 11	10	6 x 11	10.2	6 x 11	10.2
2.2	5 x 11	14			5 x 11	18	6 x 11	16	6 x 11	16
3.3	5 x 11	21			5 x 11	24	8 x 11	21	8 x 11	21
4.7	5 x 11	24	5 x 11	27	5 x 11	27	8 x 11	24	10 x 12	27
10	5 x 11	39	5 x 11	42	6 x 11	45	10 x 12	39	10 x 15	42
22	6 x 11	57	6 x 11	69	8 x 11	78	10 x 19	66	10 x 22	66
33	6 x 11	75	8 x 11	84	10 x 12	102	13 x 20	90	13 x 25	96
47	6 x 11	90	8 x 11	114	10 x 15	138	13 x 25	108	13 x 25	108
100	8 x 11	150	10 x 12	180	13 x 20	240	16 x 25	180	16 x 32	198
150							16 x 36	252	18 x 36	270
							22 x 30		22 x 30	270
220	10 x 15	264	10 x 19	294	16 x 25	436	18 x 36	306	18 x 40	312
							22 x 30	306	22 x 35	312
270							18 x 40	324	22 x 40	342
							22 x 35	324		
330	10 x 19	398	13 x 20	408	16 x 25	516	22 x 40	360		
470	13 x 20	456	13 x 25	528	16 x 32	660				
1000	16 x 25	810	18 x 32	930	18 x 40	1010				
					22 x 35	1010				
2200	18 x 36	1250	18 x 40	1320						
	22 x 30	1250	22 x 35	1350						
3300	22 x 40	1420								

Note : * I. D x L : mm

* 2. mA rms at 105°C, 120Hz



CASE SIZE OF STANDARD PRODUCTS Dø ≥ 6mm with Safety Vent at Can Bottom

CAP. (μF)	RATED VOLTAGE W/V									
	250		315		350		400		450	
Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	
0.47	6 x 11	7.2								
1	6 x 11	10.2	6 x 11	10.2	8 x 11	10.8	8 x 11	10.8	10 x 12	11.4
2.2	8 x 11	18	8 x 11	18	10 x 12	18	10 x 12	18	10 x 19	17.4
3.3	10 x 12	21	10 x 12	21	10 x 15	21	10 x 19	21	10 x 19	21
4.7	10 x 12	27	10 x 15	45	10 x 15	27	10 x 19	27	13 x 20	30
10	10 x 19	42	10 x 19	42	13 x 20	42	13 x 20	42	13 x 25	45
22	13 x 25	78	13 x 25	72	13 x 25	66	16 x 25	66	16 x 32	66
33	13 x 25	96	16 x 25	90	16 x 32	84	16 x 32	84	18 x 36	90
									22 x 30	84
47	16 x 25	126	16 x 30	144	18 x 36	132	18 x 36	132	22 x 40	138
					22 x 30	132	22 x 30	132		
100	18 x 36	204	18 x 40	204	22 x 40	216				
	22 x 30	204	22 x 35	204						
150	18 x 40	276	22 x 40	270						
	22 x 35	276								
220	22 x 40	320								

Note : * I. D x L : mm

* 2. mA rms at 105°C, 120Hz

Miniature Size Aluminum Electrolytic Capacitors

SP [Miniature and Long Life]

105°C Single-Ended Lead Aluminum Electrolytic Capacitors For Electronic Ballast



DESCRIPTION

Applicable for Electronic Ballast

High Temperature Load Life at 105°C for 8000~10000 Hours


Frequency coefficient

Frequency(Hz)	120	1K	10K	100K
Coefficient	0.50	0.80	0.90	1.00


Temperature coefficient

Temperature(°C)	65	85	105
Factor	1.70	1.40	1.00

DIAGRAM OF DIMENSIONS

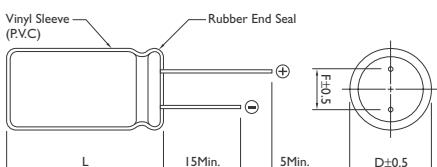

Rubber Stand-off

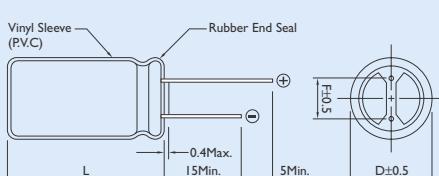

Dimensions : mm

Dø	F	dø
4.0	1.5	0.45
5.0	2.0	0.5
6.0	2.5	
8.0	3.5	
10.0	5.0	0.6
12.0		
13.0		
16.0	7.5	0.8
18.0		
22.0	10.0	0.8



CASE SIZE OF STANDARD PRODUCTS AND PERMISSIBLE RIPPLE CURRENT

CAP. (μF)	RATED VOLTAGE WV					
	160			200		
	Size	Ripple	Impedance	Size	Ripple	Impedance
22				10 x 19	440	1.30
33	10 x 19	500	1.30	10 x 19	520	0.91
				13 x 20	580	0.91
47	10 x 19	580	0.96	13 x 20	660	0.91
	13 x 20	660	0.96			
68	12 x 25	720	0.64	13 x 25	720	0.63
	16 x 20	760	0.64	16 x 20	760	0.56
	13 x 25	970	0.48	16 x 25	1120	0.27
100	16 x 20	1120	0.56			
	16 x 25	1120	0.48			
	18 x 20	1120	0.56			
	16 x 25	1200	0.40	16 x 32	1280	0.22
150	16 x 32	1300	0.40			
	18 x 25	1300	0.40			
220	16 x 32	1300	0.27			
	18 x 25	1300	0.36			
330	18 x 36	1380	0.21			

Note : * I. D x L : mm

* 2. mA rms at 105°C, 120Hz



CASE SIZE OF STANDARD PRODUCTS AND PERMISSIBLE RIPPLE CURRENT

CAP. (μF)	RATED VOLTAGE WV					
	400		450			
Size	Ripple	Impedance	Size	Ripple	Impedance	
3.3			10 x 15	100	7.00	
4.7			10 x 19	140	5.10	
6.8	10 x 19	150	4.80	10 x 19	150	4.80
			13 x 20	180	4.20	
10	10 x 19	180	2.90	13 x 20	310	2.50
22	16 x 20	300	0.95	16 x 25	560	1.70
			18 x 20	550	2.10	
33	16 x 25	520	0.91	16 x 32	620	1.10
			18 x 25	590	1.10	
47	16 x 32	700	0.68	16 x 36	880	0.93
			18 x 32	880	0.93	
68	18 x 32	870	0.63			

Note : * I. D x L : mm

* 2. mA rms at 105°C, 120Hz

SB [For Low Leakage Current]

105°C Single-Ended Lead Aluminum Electrolytic Capacitors

Miniature Size Aluminum Electrolytic Capacitors

ELECTRICAL CHARACTERISTICS

Operating Temperature : -40° ~ +105°C

Working Voltage : 6.3 ~ 100V

Rate Capacitance Range : 0.1 ~ 4700μF

Capacitance Tolerance : -20 ~ +20%

DC Leakage Current (μA) : $I = 0.002CV$ (μA) or 0.4μA Whichever is greater.

(After 2 Minutes Application of DC Working Voltage at 25°C)

Equivalent Series Resistance (E.S.R. at 120Hz):

When measured at 25°C and 1 KHz E.S.R value shall not exceed the value given in the table on the next page.

WV (V) :	6.3	10	16	25	35 ~ 100
D.F (%) :	20	16	13	12	10

For capacitor whose capacitance exceeds 1000μF. The value of D.F(%) is increased by 2% for every addition of 1000μF.

Load Life : 1000 Hours at 105°C Assured with Full Rated Maximum Ripple Current Applied

- (a) Capacitance Change : Within 25% of Initial Value
- (b) Dissipation Factor : Not Exceed 200% of Initial Requirement
- (c) Leakage Current : Not Exceed the Initial Requirement

Shelf Life : 500 Hours, No Voltage Applied, at 105°C

- (a) Capacitance Change : Within 25% of Initial Value
- (b) Dissipation Factor : Not Exceed 200% of Initial Requirement
- (c) Leakage Current : Not Exceed 200% of Initial Requirement

WV (V) :	6.3	10	16	25	35 ~ 100
Impedance : Z - 40°C / Z + 20°C	4	4	3	3	3



DESCRIPTION

Used in where low leakage current is essential as in coupling of pre-amplifiers.

Very low leakage current remains even after prolonged storage.

Multiplier for Ripple Current


Frequency coefficient

Frequency(Hz)	50	120	300	1K	10K	100K
6.3~25V	0.85	1.00	1.04	1.08	1.19	1.19
26~50V	0.80	1.00	1.30	1.40	1.43	1.43
50~100V	0.77	1.00	1.34	1.43	1.48	1.48

Temperature coefficient

Temperature(°C)	65	85	105
Factor	1.50	1.20	1.00

DIAGRAM OF DIMENSIONS

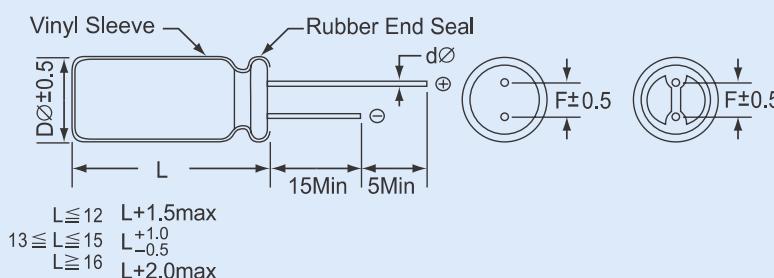

Dimensions : mm

Dø	F	dø
4.0	1.5	0.45
5.0	2.0	0.5
6.0	2.5	
8.0	3.5	
10.0	5.0	0.6
12.0		
13.0		
16.0	7.5	0.8
18.0		
22.0	10.0	0.8



CASE SIZE OF STANDARD PRODUCTS Dø ≥ 6mm with Safety Vent at Can Bottom

CAP. (µF) RATED VOLTAGE WV

CAP. (µF)	RATED VOLTAGE WV	6.3				10				16						
		SIZE	Ripple 120Hz	Impedance 10K Hz	ESR 120Hz	1K Hz	SIZE	Ripple 120Hz	Impedance 10K Hz	ESR 120Hz	1K Hz	SIZE	Ripple 120Hz	Impedance 10K Hz	ESR 120Hz	1K Hz
0.1																
0.15																
0.22																
0.33																
0.47																
0.56																
0.68																
1.0																
1.5																
2.2																
3.3																
4.7																
6.8																
10												5x11	40	5.00	17.00	11.30
15												5x11	56	4.43	10.60	7.07
22						5x11	68	4.01	7.83	5.22	6x11	70	3.70	7.23	4.82	
33						6x11	78	2.67	5.22	3.48	6x11	95	2.46	4.82	3.21	
47						6x11	106	1.87	3.66	2.44	8x11	122	1.73	3.38	2.25	
68	6x11	80	1.50	3.00	2.00	6x11	142	1.29	2.53	1.68	8x11	168	1.20	2.34	1.56	
100	6x11	126	0.88	1.72	1.15	8x11	179	0.87	1.72	1.14	10x12	264	0.81	1.59	1.06	
150	8x11	196	0.59	1.15	0.77	10x12	280	0.58	1.14	0.76	10x15	416	0.53	1.06	0.70	
220	10x12	272	0.40	0.78	0.52	10x15	355	0.40	0.78	0.52	10x19	553	0.36	0.72	0.48	
330	10x15	388	0.26	0.52	0.34	10x19	480	0.26	0.52	0.34	13x20	732	0.24	0.48	0.32	
470	10x19	507	0.18	0.36	0.24	13x20	640	0.18	0.36	0.24	13x20	1040	0.16	0.33	0.22	
680	13x20	700	0.12	0.25	0.16	13x25	848	0.12	0.25	0.16	13x25	1280	0.11	0.23	0.15	
820	13x25	850	0.11	0.21	0.14	13x25	980	0.11	0.21	0.14	16x25	1450	0.09	0.18	0.12	
1000	13x25	896	0.08	0.17	0.11	13x25	1081	0.08	0.17	0.11	16x25	1700	0.06	0.14	0.10	
1500	13x25	1204	0.05	0.11	0.07	16x25	1376	0.05	0.11	0.07	16x32	1750	0.06	0.10	0.06	
2200	16x25	1513	0.04	0.09	0.06	16x32	1680	0.04	0.09	0.06	18x36	1900	0.05	0.08	0.06	
3300	16x36	1902	0.04	0.06	0.04	16x36	2155	0.03	0.06	0.04	18x40	2250	0.04	0.06	0.04	
4700	18x36	2272	0.02	0.05	0.03	18x36	2560	0.02	0.05	0.03						

Note : * I. D x L : mm

* 2. Ripple Current mA rms at 105°C, 100Hz

* 3. Impedance : (ohm) 25°C/10KHz

* 4. ESR : (ohm) 25°C/120Hz and 1KHz



CASE SIZE OF STANDARD PRODUCTS Dø ≥ 6mm with Safety Vent at Can Bottom

CAP. (µF) RATED VOLTAGE WV

CAP. (µF)	SIZE	25				35				50					
		Ripple 120Hz	Impedance 10K Hz	ESR 120Hz	1K Hz	SIZE	Ripple 120Hz	Impedance 10K Hz	ESR 120Hz	1K Hz	SIZE	Ripple 120Hz	Impedance 10K Hz	ESR 120Hz	
0.1											5x11	1	323.00	510.0	215.0
0.15											5x11	4	270.00	355.0	126.0
0.22											5x11	4	235.00	223.0	80.00
0.33											5x11	6	175.00	185.0	65.20
0.47											5x11	7	90.00	96.00	45.70
0.56											5x11	7	40.00	50.00	33.00
0.68											5x11	9	38.50	47.00	31.20
1.0											5x11	18	32.70	43.40	25.30
1.5											5x11	24	28.50	35.20	21.70
2.2											5x11	30	22.40	32.50	17.50
3.3											5x11	36	17.40	24.30	13.20
4.7	5x11	27	8.00	20.00	13.00	5x11	40	14.40	28.20	18.80	6x11	45	12.50	20.70	9.20
6.8	5x11	42	7.60	19.50	11.00	5x11	45	10.00	19.50	13.00	6x11	55	10.00	19.50	9.00
10	6x11	63	6.80	13.20	8.84	6x11	67	6.80	13.20	8.84	8x11	82	6.80	13.20	8.84
15	6x11	67	4.53	8.84	5.89	8x11	75	4.53	8.80	5.89	8x11	97	4.56	8.84	5.89
22	8x11	84	3.08	6.02	4.01	8x11	97	3.08	6.02	4.01	10x12	127	3.08	6.02	4.01
33	8x11	102	2.05	4.01	2.67	10x12	139	2.05	4.01	2.67	10x15	156	2.05	4.01	2.67
47	10x12	141	1.44	2.82	1.88	10x12	166	1.44	2.82	1.88	10x15	217	1.44	2.82	1.88
68	10x12	190	1.00	1.95	1.30	10x15	238	1.00	1.95	1.30	10x19	300	1.00	1.95	1.30
100	10x15	277	0.67	1.32	0.88	10x19	310	0.67	1.32	0.88	13x25	390	0.67	1.32	0.88
150	10x19	455	0.44	0.88	0.58	13x20	491	0.44	0.88	0.58	13x25	569	0.44	0.88	0.58
220	13x20	590	0.30	0.60	0.40	13x25	630	0.30	0.60	0.40	16x25	910	0.30	0.60	0.40
330	13x25	754	0.20	0.40	0.26	16x25	771	0.20	0.40	0.26	16x32	986	0.20	0.40	0.26
470	16x25	1110	0.13	0.28	0.18	16x25	1150	0.15	0.28	0.18	16x36	1249	0.13	0.28	0.18
680	16x32	1385	0.09	0.19	0.12	16x3	1462	0.09	0.19	0.12	16x36	1870	0.09	0.19	0.12
820	16x32	1540	0.08	0.15	0.10	16x36	1630	0.08	0.15	0.10	16x36	1950	0.08	0.15	0.10
1000	16x36	1710	0.06	0.13	0.08	18x36	1723	0.06	0.13	0.08	18x40	2070	0.06	0.13	0.08
1500	16x36	1779	0.03	0.08	0.05	18x4	2006	0.03	0.08	0.05					
2200	18x40	2174	0.03	0.06	0.04										
3300															
4700															

Note : * I. D x L : mm

* 2. Ripple Current mA rms at 105°C, 100Hz

* 3. Impedance : (ohm) 25°C/10KHz

* 4. ESR : (ohm) 25°C/120Hz and 1KHz

Miniature Size Aluminum Electrolytic Capacitors



DESCRIPTION

Non-Polar Type for Used in Horizontal Deflection Current

Correction at High Frequency and High Ripple Currents


Frequency coefficient

Frequency(Hz)	60	120	400~1K	15.75K
Coefficient	0.40	0.40	0.80	1.00

Temperature coefficient

Temperature(°C)	65	70	85
Factor	1.15	1.00	0.80

DIAGRAM OF DIMENSIONS

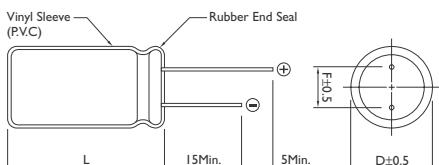

SR [For Horizontal Deflection]

Bi-Polarized Capacitors for Horizontal Deflection Circuits of TV Sets

ELECTRICAL CHARACTERISTICS

Operating Temperature : -40° ~ +85°C

Working Voltage : 25, 35, 50V

Rate Capacitance Range : 2.2 ~ 47μF

Capacitance Tolerance : -20 ~ +20%

DC Leakage Current (μA) : 100μA Max.

(After 5 Minutes in Both Direction, at 25°C)

Dissipation Factor : at 120 Hz, 25°C

WV (V)	25	35	50
D.F (%)	5	5	5

Load Life : 1000 Hours at 70°C with Permissible Ripple Current at 15.75 KHz

(Polarity Inverted Every 250 Hours)

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement

(c) Leakage Current : Not Exceed the Initial Requirement


Shelf Life : 500 Hours, No Voltage Applied, at 85°C

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement

(c) Leakage Current : Not Exceed 200% of Initial Requirement

Rubber Stand-off

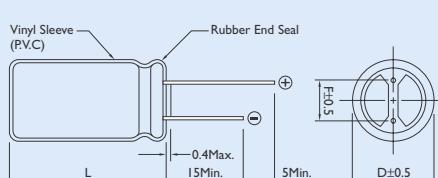

L ≤ 12 L + 1.5Max.
13 ≤ L ≤ 15 L + 1.0
L ≥ 16 L + 2.0Max.

Dimensions : mm

Dø	F	dø
4.0	1.5	0.45
5.0	2.0	0.5
6.0	2.5	
8.0	3.5	
10.0	5.0	0.6
12.0		
13.0		
16.0	7.5	0.8
18.0		
22.0	10.0	0.8



CASE SIZE & PERMISSIBLE RIPPLE CURRENT OF STANDARD PRODUCTS

CAP. (μ F) RATED VOLTAGE WV

CAP. (μ F)	25		35		50	
	Size	Ripple	Size	Ripple	Size	Ripple
2.2	16 x 25	6	16 x 25	6	16 x 25	6
3.3	16 x 25	7	16 x 25	7	16 x 25	7
4.7	16 x 25	7	16 x 25	7	16 x 25	7
5.6	16 x 32	7	16 x 32	7	16 x 32	7
6.8	16 x 36	8	16 x 36	8	16 x 36	8
8.2	16 x 36	8	16 x 36	8	16 x 36	8
10	18 x 40	12	18 x 40	12	18 x 40	12
13	18 x 40	12	18 x 40	12	18 x 40	12
15	18 x 40	12	18 x 40	12	18 x 40	12
18	22 x 40	13	22 x 40	13	22 x 40	13
20	22 x 40	13	22 x 40	13	22 x 40	13
22	22 x 40	13	22 x 40	13	22 x 40	13
25	22 x 40	13	22 x 40	13	22 x 40	13
47	22 x 40	13	22 x 40	13		

Note : * I. D x L : mm

* 2. mA rms at 105°C, 120Hz

Miniature Size Aluminum Electrolytic Capacitors



DESCRIPTION

Non-polar miniature type for used in reversing polarity DC voltage circuits.


Frequency coefficient

Frequency(Hz)	60	120	300	1K	10K~100K
Factor	0.75	1.00	1.20	1.32	1.65

Temperature coefficient

Temperature(°C)	65	85	105
Factor	1.30	1.20	1.00

DIAGRAM OF DIMENSIONS

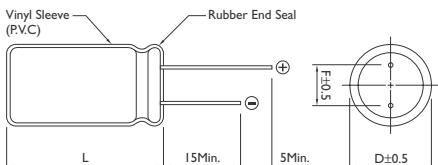

SN [For Non Polar]

105°C Single-Ended Lead Aluminum Electrolytic Capacitors For Non-Polar General Purpose

ELECTRICAL CHARACTERISTICS

Operating Temperature : -40°C ~ +105°C

Working Voltage : 6.3 ~ 100V

Rate Capacitance Range : 0.47 ~ 2200μF

Capacitance Tolerance : -20 ~ +20%

DC Leakage Current (μA) : $I = 0.03 CV + 3\mu A$

(After 5 Minutes Application of DC Working Voltage at 25°C)

Dissipation Factor : at 120Hz, 25°C

WV (V) :	6.3	10	16	25	35	50	100
D.F (%) :	24	20	17	15	14	12	10

For capacitor whose capacitance exceeds 1000μF. The value of D.F(%) is increased by 2% for every addition of 1000μF.

Load Life : 1000 Hours at 105°C with the Polarity Inverted Every 250 Hours

(a) Capacitance Change : Within 25% of Initial Value

(b) Dissipation Factor : Not Exceed 150% of Initial Requirement

(c) Leakage Current : Not Exceed the Initial Requirement

Shelf Life : 500 Hours, No Voltage Applied, at 105°C


(a) Capacitance Change : Within 25% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement

(c) Leakage Current : Not Exceed 200% of Initial Requirement

Dimensions : mm

Rubber Stand-off

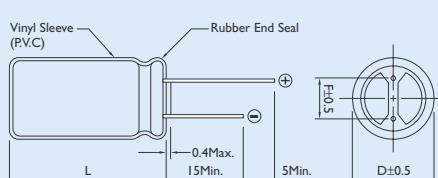

Dø	F	dø
4.0	1.5	0.45
5.0	2.0	0.5
6.0	2.5	
8.0	3.5	
10.0	5.0	0.6
12.0		
13.0		
16.0	7.5	0.8
18.0		
22.0	10.0	0.8

$L \leq 12 \quad L + 1.5\text{Max.}$
 $13 \leq L \leq 15 \quad L + 1.0$
 $L \geq 16 \quad L + 2.0\text{Max.}$



CASE SIZE & PERMISSIBLE RIPPLE CURRENT OF STANDARD PRODUCTS

CAP. (μF)	RATED VOLTAGE WV																	
	6.3		10		16		25		35		50		63		80		100	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.22											5x11	5						
0.47											5x11	5	5x11	11	5x11	11	5x11	14
1											5x11	17	5x11	17	5x11	17	5x11	21
2.2											5x11	25	5x11	25	5x11	29	6x11	34
3.3											6x11	31	6x11	37	6x11	39	8x11	49
4.7									5x11	34	5x11	34	5x11	37	8x11	47	8x11	58
											6x11	41	6x11	44				
10					6x11	45	5x11	42	6x11	54	6x11	56	8x11	74	10x12	88	8x11	80
							6x11	50			8x11	70					10x12	100
					5x11	57	5x11	59	6x11	69	8x11	94	6x11	75	8x11	95	10x19	150
22							6x11	69	8x11	86			8x11	97	10x15	130		
														10x12	115			
33	5x11	63	6x11	77	8x11	98	8x11	105	10x12	125	8x11	110	8x11	115	13x20	205	13x20	220
												10x15	150	10x19	175			
47	6x11	84	6x11	93	8x11	115	10x12	140	10x15	165	8x11	130	13x20	230	13x20	245	13x25	285
												10x19	190					
	8x11	140	8x11	193	8x11	140	10x19	240	13x20	285	13x20	310	16x25	410	16x25	435	16x32	510
100							10x12	175										
							10x15	205										
220	10x12	235	10x15	255	10x19	330	13x20	390	16x25	520	16x25	570	16x32	660				
330	10x15	310	10x19	380	13x20	445	16x25	580	16x25	630	16x36	790						
470	10x19	400	13x20	470	13x25	570	16x25	690	16x32	820								
1000	13x25	690	16x25	885	16x32	1020												
2200	16x32	1250	16x36	1450														


Note : * I. D x L : mm

* 2. Ripple Current mA rms at 105°C, 120KHz

Miniature Size Aluminum Electrolytic Capacitors

SC [For Low Impedance and Low E.S.R
Suitable for Output of Mother Board]

105°C Single-Ended Lead Aluminum Electrolytic Capacitors For High Frequency Applications



DESCRIPTION

Used in switching regulator applications in computers. Especially for high frequency.

Low impedance and E.S.R, high permissible ripple current at high frequency and higher operating temperature (-40°C to +105°C).

High Temperature Load Life at 105°C for 3000 Hours

Multiplier for Ripple Current


Frequency coefficient

Frequency(Hz)	50	120	300	1K	10K	100K
~4.7μF	0.30	0.40	0.50	0.70	0.80	1.00
5.6~33μF	0.40	0.50	0.60	0.80	0.90	1.00
34~330μF	0.60	0.70	0.80	0.90	0.95	1.00
331~1000μF	0.65	0.95	0.90	0.98	1.00	1.00
1200μF Higher	0.85	0.90	0.95	0.98	1.00	1.00

Temperature coefficient

Temperature(°C)	65	85	105
Factor	1.80	1.50	1.00

DIAGRAM OF DIMENSIONS

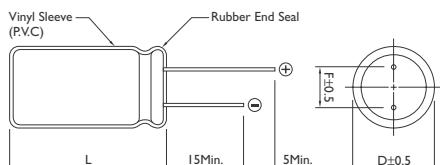

ELECTRICAL CHARACTERISTICS

Operating Temperature : -40° ~ +105°C

Working Voltage : 6.3 ~ 100V

Rate Capacitance Range : 4.7 ~ 15000μF

Capacitance Tolerance : -20 ~ +20%

DC Leakage Current (μA) : $I = 0.01 CV(\mu A)$ or $3\mu A$ Whichever is greater.

(Measurements shall be Made After a 2 Minute Charge at Rated Working Voltage)

Dissipation Factor : at 120 Hz, 25°C

WV (V) :	6.3	10	16	25	35	50	63	80	100
D.F(%) :	15	14	12	10	10	8	8	7	7

For capacitor whose capacitance exceeds 1000μF. The value of D.F(%) is increased by 2% for every addition of 1000μF.

WV (V) :	6.3	10	16	25	35	50	63	100
Impedance : $Z - 40^\circ C / Z + 20^\circ C$	10	8	5	4	4	4	4	4

Load Life : 3000 Hours at 105°C Assured with Full Rated Maximum Ripple Current Applied

$5 \times 11 \sim 10 \times 12$: Life = 2000 Hours

10 x 15 or Higher : Life = 3000 Hours

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement

(c) Leakage Current : Not Exceed the Initial Requirement

Shelf Life : 1000 Hours, No Voltage Applied, at 105°C


(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200 % of Initial Requirement

(c) Leakage Current : Not Exceed 200% of Initial Requirement

Dimensions : mm

Rubber Stand-off

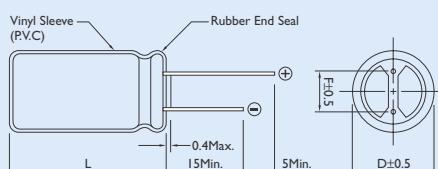

$L \leq 12$ $L + 1.5\text{Max.}$
 $13 \leq L \leq 15$ $L^{+1.0}_{-0.5}$
 $L \geq 16$ $L + 2.0\text{Max.}$

Dø	F	dø
4.0	1.5	0.45
5.0	2.0	0.5
6.0	2.5	
8.0	3.5	
10.0	5.0	0.6
12.0		
13.0		
16.0	7.5	0.8
18.0		
22.0	10.0	0.8



CASE SIZE OF STANDARD PRODUCTS Dø ≥ 6mm with Safety Vent at Can Bottom

CAP. (μF) RATED VOLTAGE WV

CAP. (μF)	6.3			10			16			25		
	Size	Ripple	ESR									
4.7												
6.8												
10										*4 x 7	40	2.000
										5 x 11	50	0.550
22												
33												
47										5 x 11	150	0.420
56												
68							5 x 11	150	0.420	6 x 11	200	0.370
100				5 x 11	150	0.420	5 x 11	200	0.370	6 x 11	250	0.220
120				5 x 11	200	0.370	6 x 11	250	0.320	8 x 11	300	0.200
150	5 x 11	200	0.420	6 x 11	250	0.320	6 x 11	300	0.220	8 x 11	550	0.140
220	6 x 11	250	0.320	6 x 11	300	0.220	8 x 11	550	0.140	*8 x 11	620	0.120
										8 x 15	750	0.100
270	*6 x 11	300	0.220									
	*6 x 11	320	0.230	8 x 11	550	0.140	*8 x 11	620	0.120	*8 x 15	660	0.100
330	8 x 11	400	0.180				8 x 15	750	0.100	8 x 20	800	0.069
										10 x 15	900	0.086
	*6 x 11	440	0.160	*8 x 11	620	0.120	*8 x 15	730	0.093	*8 x 20	1000	0.067
470	8 x 11	550	0.140	8 x 15	750	0.100	10 x 12	800	0.085	*10 x 12	900	0.086
										10 x 15	1050	0.064
680	*8 x 11	580	0.120	*8 x 11	640	0.110	10 x 15	1050	0.064	10 x 19	1100	0.039
	8 x 15	700	0.100	10 x 12	800	0.085						
820	8 x 20	750	0.085	10 x 15	1050	0.064	10 x 19	1100	0.044	10 x 19	1250	0.039
	*8 x 11	580	0.150	8 x 20	1080	0.065	*10 x 15	1140	0.043	*10 x 19	1160	0.047
1000	*8 x 15	670	0.069	10 x 12	930	0.075	10 x 19	1250	0.039	*10 x 25	1310	0.042
	8 x 20	800	0.069	10 x 15	990	0.085				13 x 20	1450	0.038
	10 x 12	690	0.080	10 x 19	1100	0.050						
1200	10 x 15	1000	0.064	10 x 19	1250	0.044	*10 x 25	1310	0.042			
							13 x 20	1450	0.038			
	*8 x 15	980	0.085	10 x 9	1450	0.039	*10 x 19	1200	0.045	*12 x 30	1750	0.032
1500	*8 x 20	1070	0.051				13 x 20	1600	0.034	16 x 25	2000	0.028
	*10 x 15	1070	0.055									
	10 x 19	1250	0.044									
	*10 x 19	1220	0.051	*10 x 19	1330	0.047	*10 x 30	1780	0.032	*13 x 30	1810	0.029
2200	*10 x 25	1310	0.048	*10 x 25	1450	0.025	*13 x 20	1720	0.033	*16 x 25	1660	0.032
	13 x 20	1450	0.043	13 x 20	1600	0.038	13 x 25	2000	0.028	16 x 32	2200	0.024
3300	*10 x 25	1400	0.043	*10 x 30	1740	0.032	*13 x 40	2200	0.026	16 x 36	2550	0.019
	13 x 25	1700	0.035	13 x 25	2000	0.028	16 x 25	2200	0.024			
3900	13 x 25	1750	0.032									
	*12 x 30	1570	0.033	*13 x 25	1860	0.028	16 x 6	2550	0.019	18 x 36	2800	0.019
4700	*13 x 25	1570	0.032	16 x 25	2200	0.024						
	16 x 25	1800	0.028									
6800	16 x 32	2000	0.024	16 x 36	2550	0.019	18 x 36	2800	0.019	18 x 36	2800	0.019
8200	16 x 32	2350	0.019	18 x 36	2800	0.019						
10000	16 x 36	2550	0.019									
15000	18 x 36	3000	0.019									

Note : * I. D x L : mm

*2. Ripple Current :(mA r.m.s 105°C / 100KHz), ESR (Ω Max20°C/100KHz)

*3. ** is down size, Edurance is less 1000 hrs than standard



CASE SIZE OF STANDARD PRODUCTS Dø ≥ 6mm with Safety Vent at Can Bottom

CAP. (µF) RATED VOLTAGE WV

CAP. (µF)	35			50			63			100		
	Size	Ripple	ESR	Size	Ripple	ESR	Size	Ripple	ESR	Size	Ripple	ESR
4.7	5 x 11	115	1.200	5 x 11	115	2.000	5 x 11	115	2.200	5 x 11	120	2.000
6.8	5 x 11	120	1.000	5 x 11	120	1.850	5 x 11	200	2.000	5 x 11	140	1.850
10	5 x 11	140	0.900	5 x 11	140	1.700	5 x 11	140	1.850	6 x 11	200	1.500
15	5 x 11	170	0.690	5 x 11	180	1.200	5 x 11	200	1.700	6 x 11	250	1.200
22	5 x 11	190	0.420	5 x 11	200	0.700	6 x 11	250	1.200	8 x 11	300	0.790
33	5 x 11	200	0.420	6 x 11	250	0.600	6 x 11	300	0.900	8 x 15	450	0.590
47	6 x 11	250	0.370	6 x 11	300	0.520	8 x 11	450	0.700	10 x 15	550	0.350
68	6 x 11	300	0.220	8 x 11	450	0.350	8 x 11	550	0.520	10 x 9	650	0.240
100	*6 x 11	360	0.180	*8 x 11	480	0.290	8 x 20	650	0.350	13 x 20	800	0.180
	8 x 11	450	0.140	8 x 15	550	0.250						
120	8 x 11	550	0.130	8 x 20	650	0.210	10 x 15	800	0.300	13 x 25	1050	0.150
150	8 x 15	650	0.100	10 x 12	800	0.160	10 x 15	1050	0.200	13 x 5	1300	0.110
220	*8 x 15	730	0.075	10 x 15	1050	0.100	10 x 19	1300	0.150	16 x 25	1400	0.071
	10 x 12	800	0.069									
330	*10 x 15	900	0.052	10 x 9	1300	0.072	13 x 0	1400	0.100	16 x 2	1550	0.049
	10 x 19	1050	0.044									
470	10 x 19	1300	0.039	*10 x 19	1390	0.075	13 x 25	1550	0.064	18 x 36	1700	0.038
				13 x 20	1400	0.060						
680	13 x 20	1400	0.038	13 x 25	1550	0.050	16 x 25	1700	0.052			
820	13 x 20	1550	0.034	16 x 25	1700	0.040	16 x 32	1900	0.048			
1000	13 x 25	1700	0.029	16 x 25	1900	0.039	16 x 32	2100	0.042			
1200	16 x 25	1900	0.028	16 x 32	2100	0.025	16 x 36	2550	0.036			
1500	16 x 25	2100	0.024	16 x 36	2550	0.025	18 x 36	2800	0.033			
2200	*16 x 32	2300	0.021	18 x 40	2800	0.025						
	16 x 36	2550	0.019									
3300	18 x 36	2880	0.019									
3900												
4700												
6800												
8200												
10000												
15000												

Note : * I. D x L : mm

*2. Ripple Current :(mA r.m.s 105°C / 100KHz), ESR (Ω Max20°C / 100KHz)

*3. ** is down size, Edurance is less 1000 hrs than standard

SM [For Very Low Impedance and Very Low E.S.R Suitable for Output of Mother Board]

105°C Single-Ended Lead Aluminum Electrolytic Capacitors For High Frequency Applications

Miniature Size Aluminum Electrolytic Capacitors

ELECTRICAL CHARACTERISTICS

Operating Temperature : -40° ~ +105°C

Working Voltage : 6.3 ~ 25V

Rate Capacitance Range : 470 ~ 4700μF

Capacitance Tolerance : -20 ~ +20%

DC Leakage Current (μA) : $I = 0.01 CV(\mu A)$

(Measurements shall be Made After a 2 Minute Charge at Rated Working Voltage)

Dissipation Factor : at 120 Hz, 25°C

WV (V):	6.3	10	16	-
D.F (%) :	15	14	12	-

For capacitor whose capacitance exceeds 1000μF. The value of D.F(%) is increased by 2% for every addition of 1000μF.

Load Life : 2000 Hours for $D = 8\theta$; 3000 Hours for $D \geq 10\theta$ at 105°C

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement

(c) Leakage Current : Not Exceed the Initial Requirement

Shelf Life : 1000 Hours, No Voltage Applied, at 105°C

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200 % of Initial Requirement

(c) Leakage Current : Not Exceed 200% of Initial Requirement



DESCRIPTION

Used in switching regulator applications in computers. Especially for high frequency.

Very low impedance and E.S.R., high permissible ripple current at high frequency and higher operating temperature (-40°C to +105°C).

High Temperature Load Life at 105°C for 3000 Hours

Multiplier for Ripple Current

Frequency coefficient

Frequency(Hz)	60	120	1K	10K	100K
5.6~33μF	0.45	0.55	0.75	0.90	1.00
39~330μF	0.6	0.70	0.85	0.95	1.00
470~1000μF	0.65	0.75	0.90	0.98	1.00
1200~6800μF	0.75	0.80	0.95	1.00	1.00

Temperature coefficient



Temperature(°C)	65	85	105
Factor	2.00	1.60	1.00

Dimensions : mm

DIAGRAM OF DIMENSIONS

Dø	F	dø
4.0	1.5	0.45
5.0	2.0	0.5
6.0	2.5	
8.0	3.5	
10.0	5.0	0.6
12.0		
13.0		
16.0	7.5	0.8
18.0		
22.0	10.0	0.8

Rubber Stand-off

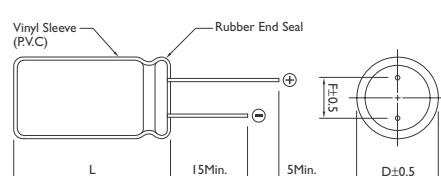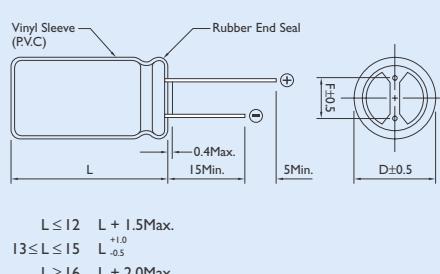



CASE SIZE OF STANDARD PRODUCTS $D\phi \geq 6\text{mm}$ with Safety Vent at Can Bottom

CAP. (μF)	RATED VOLTAGE								
	SIZE	6.3 Ripple	ESR	SIZE	10 Ripple	ESR	SIZE	16 Ripple	ESR
330							*8 x 11		0.066
470	8 x 11	582	0.100	8 x 11	760	0.072	8 x 15	995	0.056
							10 x 12	1030	0.053
680				8 x 11	760	0.056	8 x 20	1250	0.041
				8 x 15	995	0.067	10 x 15	1430	0.038
1000	8 x 15	950	0.053	8 x 20	1250	0.041	10 x 19	1820	0.023
				10 x 15	1430	0.038			
	8 x 20	1250	0.041	10 x 19	1820	0.023	*10 x 19	1900	0.023
1200	10 x 12	1240	0.044				10 x 22	2150	0.022
	10 x 15	1430	0.038						
1500	10 x 19	1820	0.023	*10 x 22	1920	0.025	13 x 20	2360	0.028
				10 x 25	2150	0.022			
2200	10 x 22	2150	0.023	13 x 20	2360	0.021	13 x 25	2770	0.025
2700	10 x 25	2200	0.022				13 x 30	3290	0.023
3300	*10 x 25	2200	0.024	13 x 25	2770	0.018			
	13 x 20	2360	0.021						
3900				13 x 30	3290	0.016			
4700	13 x 30	3290	0.016						

Note : * I. D x L : mm

*2. Ripple Current :(mA r.m.s 105°C / 100KHz), ESR (Ω Max20°C / 100KHz)

*3. ** is down size, Edurance is less 1000 hrs than standard



CASE SIZE OF STANDARD PRODUCTS Dø ≥ 6mm with Safety Vent at Can Bottom

CAP. (µF) RATED VOLTAGE

CAP. (µF)	SIZE	25		SIZE	35	
		Ripple	ESR		Ripple	ESR
220	8 x 11	760	0.072	8 x 15	995	0.056
				10 x 12	1030	0.053
270	*8 x 15		0.057	8 x 20	1250	0.041
330	10 x 12	1030	0.053	10 x 15	1430	0.038
470	8 x 20	1250	0.041	10 x 19	1820	0.023
	10 x 15	1430	0.038			
680	10 x 19	1820	0.028	13 x 20	2360	0.021
820	10 x 22	2150	0.024			
	10 x 25	2200	0.021			
	*10 x 30	2200	0.024	13 x 25	2770	0.025
1000	12 x 20	2360	0.025			
	13 x 25		0.021			
1200				13 x 30	3290	0.016
1500	13 x 30	2700	0.029			
2200						
2700						
3300						
3900						
4700						

Note : * I. D x L : mm

*2. Ripple Current :(mA r.m.s 105°C / 100KHz), ESR (Ω Max20°C / 100KHz)

3. "" is down size, Edurance is less 1000 hrs than standard

SX [For Low Impedance & Low E.S.R]

105°C Single-Ended Lead Aluminum Electrolytic Capacitors For High Frequency Applications

Miniature Size Aluminum Electrolytic Capacitors

ELECTRICAL CHARACTERISTICS

Operating Temperature : -40° ~ +105°C

Working Voltage : 6.3 ~ 100V

Rate Capacitance Range : 22 ~ 15000μF

Capacitance Tolerance : -20 ~ +20%

DC Leakage Current (μA) : $I = 0.01 \text{ CV}$ or $3(\mu\text{A})$ Whichever is greater.

(Measurements shall be Made After a 2 Minute Charge at Rated Working Voltage)

Dissipation Factor : at 120 Hz, 25°C

WV (V) :	6.3	10	16	25	35	50	63	80	100
D.F (%) :	19	16	14	12	10	8	8	7	7

For capacitor whose capacitance exceeds 1000μF. The value of D.F(%) is increased by 2% for every addition of 1000μF.

Temperature Characteristics : at 120 Hz

WV (V) :	6.3	10	16	25	35	50	63	100
Impedance : $Z - 40^\circ\text{C} / Z + 20^\circ\text{C}$	10	6	5	4	4	4	4	4

Load Life : At 105°C Assured with Full Rated Maximum Ripple Current Applied

Case Dia	$\phi D \leq 8$	$\phi D = 10$	$\phi D \geq 12$
----------	-----------------	---------------	------------------

Load Life	2000	3000	5000
-----------	------	------	------

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement


(c) Leakage Current : Not Exceed the Initial Requirement

Shelf Life : 1000 Hours, No Voltage Applied, at 105°C

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200 % of Initial Requirement

(c) Leakage Current : Not Exceed 200% of Initial Requirement



DESCRIPTION

Used in switching regulator applications in computers. Especially for high frequency.

Low impedance and E.S.R., high permissible ripple current at high frequency and higher operation temperature (-40°C to +105°C).

High Temperature Load Life at 105°C for 2000 ~ 5000 Hours

Multiplier for Ripple Current

Frequency coefficient

Frequency(Hz)	50	120	300	1K	10K	100K
~4.4μF	0.30	0.40	0.50	0.70	0.80	1.00
5.6~33μF	0.40	0.50	0.60	0.80	0.90	1.00
34~330μF	0.60	0.70	0.80	0.90	0.95	1.00
331~1000μF	0.65	0.90	0.90	0.98	1.00	1.00
1200μF higher	0.85	0.90	0.95	0.98	1.00	1.00

Temperature coefficient



Temperature(°C)	65	85	105
Factor	1.80	1.50	1.00

Dimensions : mm

DIAGRAM OF DIMENSIONS

Dø	F	dø
4.0	1.5	0.45
5.0	2.0	0.5
6.0	2.5	
8.0	3.5	
10.0	5.0	0.6
12.0		
13.0		
16.0	7.5	0.8
18.0		
22.0	10.0	0.8

Rubber Stand-off

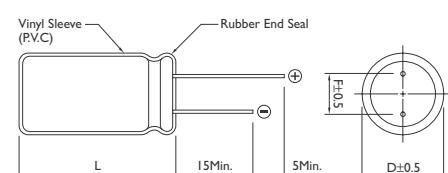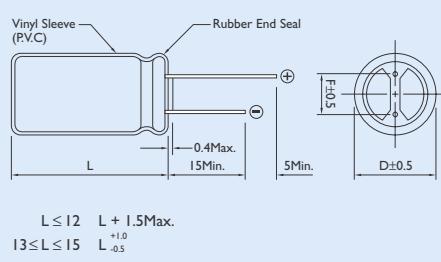



CASE SIZE OF STANDARD PRODUCTS Dø ≥ 6mm with Safety Vent at Can Bottom

CAP. (μF)	RATED VOLTAGE							
	SIZE	6.3 Ripple	ESR	SIZE	10 Ripple	ESR	SIZE	16 Ripple
4.7								
6.8								
10				5 x 11	20	5.900		
22				5 x 11	44	5.400	5 x 11	53
33				5 x 11	66	3.300	5 x 11	79
47				5 x 11	94	2.200	5 x 11	113
68				5 x 11	136	1.300	5 x 11	145
							6 x 11	163
100	5 x 11	166	1.500	5 x 11	170	1.150	6 x 11	190
				6 x 11	200	1.150	8 x 11	241
120	5 x 11	175	1.300	6 x 11	240	0.910	8 x 11	290
150	6 x 11	225	0.920	6 x 11	265	0.700	8 x 11	380
220	8 x 11	285	0.610	6 x 11	290	0.590	8 x 11	410
				8 x 11	370	0.480		
330	8 x 11	410	0.400	8 x 11	470	0.330	10 x 12	600
								0.230
470	10 x 12	550	0.280	8 x 11	480	0.300	8 x 20	710
				10 x 12	590	0.240	10 x 15	750
680	10 x 15	735	0.220	8 x 20	790	0.180	10 x 19	1050
				10 x 15	750	0.170		
820	10 x 15	795	0.190	10 x 19	990	0.140	10 x 25	1220
1000	10 x 19	950	0.170	10 x 15	900	0.135	10 x 30	1400
				10 x 19	1060	0.120		
1200	10 x 19	1020	0.140	10 x 25	1290	0.120	10 x 25	1240
							12 x 25	1450
1500	10 x 19	1000	0.140	10 x 30	1450	0.093	12 x 25	1650
	10 x 25	1200	0.120					0.072
2200	10 x 30	1450	0.095	12 x 30	1570	0.087	12 x 30	1820
				13 x 20	1900	0.073	13 x 25	2000
3300	12 x 35	1700	0.081	10 x 30	1690	0.077	13 x 40	2400
				12 x 35	2110	0.062		
4700	12 x 35	2110	0.063	13 x 40	2300	0.057	16 x 6	2650
				16 x 32	2450	0.054		
6800	16 x 32	2350	0.055	16 x 36	2680	0.046	18 x 36	2900
8200	16 x 36	2550	0.047	16 x 40	2850	0.038	18 x 40	3050
10000	16 x 40	2750	0.039	16 x 40	3050	0.037		
15000	18 x 40	2950	0.037					

Note : * I. D x L : mm

*2. Ripple Current : (mA r.m.s 105°C / 100KHz)

*3. ESR (Ω Max20°C / 100KHz)



CASE SIZE OF STANDARD PRODUCTS Dø ≥ 6mm with Safety Vent at Can Bottom

CAP. (µF)	RATED VOLTAGE								
	SIZE	25 Ripple	ESR	SIZE	35 Ripple	ESR	SIZE	50 Ripple	ESR
4.7									
6.8							5 x 11	39	3.100
10				5 x 11	42	3.100	5 x 1	58	2.000
22	5 x 11	66	3.300	5 x 11	101	1.300	6 x 11	129	0.900
33	5 x 11	99	1.300	6 x 11	151	0.870	8 x 11	194	0.720
47	5 x 1	141	1.100	8 x 11	216	0.870	8 x 11	276	0.660
68	8 x 11	204	0.570	8 x 11	312	0.370	10 x 12	400	0.310
100	6 x 11	240	0.530	8 x 11	370	0.390	8 x 15	530	0.240
	8 x 11	300	0.420	10 x 12	460	0.320	10 x 15	635	0.200
120	8 x 11	400	0.380	10 x 12	550	0.260	10 x 15	670	0.170
150	10 x 12	460	0.330	10 x 12	600	0.230	10 x 19	860	0.150
220	10 x 15	630	0.230	10 x 12	690	0.210	10 x 15	780	0.150
				10 x 15	800	0.180	10 x 25	1030	0.110
	10 x 12	690	0.220	10 x 19	1060	0.130	10 x 30	1070	0.110
330	10 x 15	800	0.190				12 x 20	1220	0.092
							13 x 25	1300	0.086
470	10 x 15	890	0.165	10 x 30	990	0.089	12 x 25	1500	0.068
	10 x 19	1050	0.140	13 x 25	1060	0.086			
560	10 x 19	1170	0.120	12 x 20	1500	0.080			
	12 x 16	1200	0.120						
680	10 x 30	1400	0.090	12 x 25	1650	0.070	12 x 35	1850	0.058
820	12 x 25	1450	0.085	12 x 30	1750	0.066	12 x 40	2020	0.052
1000	12 x 20	1420	0.091	12 x 30	2000	0.061	16 x 25	1800	0.060
	12 x 25	1650	0.078				16 x 32	2120	0.050
1200	12 x 30	1700	0.070	12 x 35	2200	0.049	16 x 36	2260	0.043
1500	12 x 30	1950	0.062	12 x 40	2350	0.046	16 x 40	2420	0.035
2200	12 x 40	2360	0.054	16 x 36	2700	0.044			
3300	16 x 36	2700	0.045	18 x 40	3050	0.035			
3900									
4700	18 x 40	3000	0.036						
6800									
8200									
10000									
15000									

Note : * I. D x L : mm

*2. Ripple Current : (mA r.m.s 105°C / 100KHz)

*3. ESR (Ω Max20°C / 100KHz)



CASE SIZE OF STANDARD PRODUCTS Dø ≥ 6mm with Safety Vent at Can Bottom

CAP. (µF) RATED VOLTAGE


CAP. (µF)	RATED VOLTAGE	63			80			100		
		SIZE	Ripple	ESR	SIZE	Ripple	ESR	SIZE	Ripple	ESR
4.7		5 x 11	36	4.600	5 x 11	43	4.200	5 x 11	65	4.100
6.8		5 x 11	52	4.300	5 x 11	62	1.900	8 x 11	94	1.300
10		5 x 11	77	2.000	6 x 11	92	1.400	8 x 11	138	1.100
15		6 x 11	116	1.400	8 x 11	138	1.100	8 x 11	207	0.800
22		8 x 11	170	1.200	8 x 11	203	0.640	10 x 12	305	0.530
33		8 x 11	256	0.660	10 x 12	305	0.540	10 x 15	500	0.350
47		10 x 12	365	0.560	10 x 15	410	0.360	10 x 19	600	0.300
68		10 x 15	500	0.360	10 x 19	600	0.260	10 x 25	795	0.190
100		10 x 15	750	0.310	10 x 25	795	0.190	10 x 30	870	0.170
								13 x 20	955	0.150
120		10 x 19	820	0.270	10 x 30	900	0.170	12 x 30	1040	0.130
150		10 x 25	950	0.200	10 x 30	955	0.150	12 x 30	1200	0.110
180								13 x 25	1300	0.100
220		12 x 25	1150	0.160	12 x 30	1200	0.130	16 x 32	1440	0.086
330		12 x 30	1360	0.140	12 x 35	1450	0.088	16 x 32	1610	0.070
		13 x 25	1420	0.130				16 x 36	1790	0.062
470		12 x 35	1780	0.091	16 x 32	1790	0.063	16 x 40	2160	0.048
								18 x 36	2200	0.047
560										
680		16 x 32	2050	0.065	16 x 40	1990	0.058			
820		16 x 36	2200	0.056	18 x 36	2200	0.050			
1000		18 x 36	2330	0.049	18 x 40	2370	0.044			
1200		18 x 40	2520	0.046						
1500										
2200										
3300										
3900										
4700										
6800										
8200										
10000										
15000										

Note : * I. D x L : mm

*2. Ripple Current : (mA r.m.s 105°C / 100KHz)

*3. ESR (Ω Max25°C / 100KHz)

Miniature Size Aluminum Electrolytic Capacitors

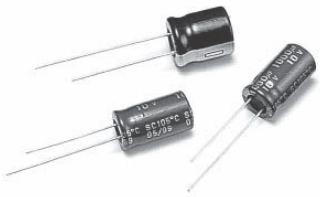

DESCRIPTION

Used in switching regulator applications in computers. Especially for high frequency.

Low impedance and E.S.R., high permissible ripple current at high frequency and higher operating temperature (-40°C to +105°C).

High Temperature Load Life at 105°C for 6000 Hours

Frequency coefficient


Frequency(Hz)	120	1K	10K	100K
22~180μF	0.40	0.75	0.90	1.00
220~560μF	0.50	0.85	0.94	1.00
680~1800μF	0.60	0.87	0.95	1.00
2200~3900μF	0.75	0.90	0.95	1.00
4700μF Higher	0.85	0.95	0.98	1.00

Temperature coefficient

Temperature(°C)	65	85	105
Factor	1.80	1.50	1.00

DIAGRAM OF DIMENSIONS

Dimensions[mm]

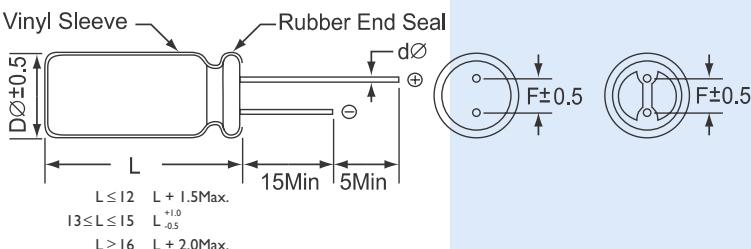

SY [For Low Impedance and Low E.S.R Suitable for Output of Mother Board]

105°C Single-Ended Lead Aluminum Electrolytic Capacitors For High Frequency Applications

ELECTRICAL CHARACTERISTICS

Operating Temperature : -40° ~ +105°C

Working Voltage : 6.3 ~ 50V

Rate Capacitance Range : 22 ~ 15000μF

Capacitance Tolerance : -20 ~ +20%

DC Leakage Current (μA) : $I = 0.01 CV(\mu A)$ or $3\mu A$ Whichever is greater.

(Measurements shall be Made After a 2 Minute Charge at Rated Working Voltage)

Dissipation Factor : at 120 Hz, 25°C

WV (V) :	6.3	10	16	25	35	50
D.F (%) :	22	19	16	14	12	10

For capacitor whose capacitance exceeds 1000μF. The value of D.F(%) is increased by 2% for every addition of 1000μF.

WV (V) :	Rated Voltage (V)	6.3	10	16	25	35	50
----------	-------------------	-----	----	----	----	----	----

Impedance :	$Z - 25^\circ C / Z + 20^\circ C$	4	3	2	2	2	2
-------------	-----------------------------------	---	---	---	---	---	---

Impedance :	$Z - 40^\circ C / Z + 20^\circ C$	8	6	4	3	3	3
-------------	-----------------------------------	---	---	---	---	---	---

Dø :	5ø~6.3ø	8ø~10øx12	10øx15~12ø	13ø~18ø
------	---------	-----------	------------	---------

Life :	3000hrs	4000hrs	5000hrs	6000hrs
--------	---------	---------	---------	---------

If dimension is down size , Endurance will be less 1000 hrs than standard.

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement

(c) Leakage Current : Not Exceed the Initial Requirement

Shelf Life : 1000 Hours, No Voltage Applied, at 105°C

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not more than 200% of specified value

(c) Leakage Current : Not more than 200% of specified value

Dimensions : mm

Dø	F	dø
4.0	1.5	0.45
5.0	2.0	0.5
6.0	2.5	
8.0	3.5	
10.0	5.0	0.6
12.0		
13.0		
16.0	7.5	0.8
18.0		
22.0	10.0	0.8



CASE SIZE OF STANDARD PRODUCTS Dø ≥ 6mm with Safety Vent at Can Bottom

CAP. (µF)	RATED VOLTAGE							
	6.3			10			16	
Size	Ripple	Impedance	Size	Ripple	Impedance	Size	Ripple	Impedance
56						5 x 11	210	0.580
100			5 x 11	210	0.580			
120						6.3 x 11	340	0.220
150	5 x 11	210	0.580					
220	6 x 11	210	0.580	6 x 11	340	0.220		
330	6 x 11	340	0.220			8 x 11	640	0.130
470				8 x 11	640	0.130	8 x 15	840
							10 x 12	865
680	8 x 11	640	0.130	8 x 15	840	0.087	8 x 20	1050
							10 x 15	1210
820	10 x 12	865	0.080	10 x 12	865	0.080		
1000	8 x 15	840	0.087	8 x 20	1050	0.069	10 x 19	1400
				10 x 15	1210	0.060	13 x 15	1450
1200	8 x 20	1050	0.069	10 x 19	1400	0.046	10 x 25	1650
	10 x 15	1210	0.060					
	10 x 19	1400	0.046	10 x 25	1650	0.042	10 x 30	1910
1500				13 x 15	1450	0.049	13 x 20	1900
							16 x 15	1940
1800	13 x 15	1450	0.049					
	10 x 25	1650	0.042	10 x 30	1910	0.031	13 x 25	2230
2200				13 x 20	1900	0.042	18 x 15	2210
				16 x 15	1940	0.042		
2700	10 x 30	1910	0.031	18 x 15	2210	0.043	13 x 30	2650
	16 x 15	1940	0.042				16 x 20	2530
3300	13 x 20	1900	0.035	13 x 25	2230	0.027	13 x 35	2880
	13 x 25	2230	0.027	13 x 30	2650	0.024	13 x 40	3350
3900	18 x 15	2210	0.043	16 x 20	2530	0.027	16 x 25	2930
							18 x 20	2860
4700	13 x 30	2650	0.024	13 x 35	2880	0.020	16 x 32	3450
							18 x 25	3140
	13 x 35	2880	0.020	13 x 40	3350	0.017	16 x 36	3610
5600	16 x 20	2530	0.027	16 x 25	2930	0.021	18 x 32	4170
				18 x 20	2860	0.026		
	13 x 40	3350	0.017	16 x 32	3450	0.017	16 x 40	4080
6800	16 x 25	2930	0.021	18 x 25	3140	0.019		
	18 x 20	2860	0.026					
8200	16 x 32	3450	0.017	16 x 36	3610	0.015	18 x 36	4220
				18 x 32	4170	0.015		
10000	16 x 36	3610	0.015	16 x 40	4080	0.013	18 x 40	4280
	18 x 25	3140	0.017	18 x 36	4220	0.014		
12000	18 x 32	4170	0.015	18 x 40	4280	0.012		
15000	18 x 36	4220	0.014					

Note : * I. D x L : mm

*2. Ripple Current : (mA r.m.s 105°C / 100KHz), Impedance (Ω Max25°C / 100KHz)



CASE SIZE OF STANDARD PRODUCTS Dø ≥ 6mm with Safety Vent at Can Bottom

CAP. (µF)	RATED VOLTAGE								
	25			35			50		
Size	Ripple	Impedance	Size	Ripple	Impedance	Size	Ripple	Impedance	
22						5 x 11	180	0.700	
33			5 x 11	210	0.580				
47	5 x 11	210	0.580						
56			6 x 11	340	0.220	6 x 11	295	0.300	
100	6 x 11	340	0.220			8 x 11	555	0.170	
120	6 x 11	340	0.220			8 x 15	730	0.120	
150			8 x 11	640	0.130	10 x 12	760	0.120	
180						8 x 20	910	0.091	
220	8 x 11	640	0.130	8 x 15	840	0.087	10 x 15	1050	0.084
				10 x 12	865	0.080			
270				8 x 20	1050	0.069	10 x 19	1220	0.060
							13 x 15	1260	0.061
330	8 x 15	840	0.087	10 x 15	1210	0.060	10 x 25	1440	0.055
	10 x 12	865	0.080						
	8 x 20	1050	0.069	10 x 19	1400	0.046	10 x 30	1690	0.043
470	10 x 15	1210	0.060	13 x 15	1450	0.049	13 x 20	1660	0.045
							16 x 15	1690	0.055
560				10 x 25	1650	0.042	13 x 25	1950	0.034
							18 x 15	1930	0.054
	10 x 19	1400	0.046	10 x 30	1910	0.031	13 x 30	2310	0.030
680	13 x 15	1450	0.049	13 x 20	1900	0.035			
				16 x 15	1940	0.042			
820	10 x 25	1650	0.042				13 x 35	2510	0.025
							16 x 20	2210	0.034
	10 x 30	1910	0.031	13 x 25	2230	0.027	13 x 40	2920	0.021
1000	13 x 20	1900	0.035	18 x 15	2210	0.043	16 x 25	2555	0.025
	16 x 15	1940	0.042				18 x 20	2490	0.036
1200	18 x 15	2210	0.043	13 x 30	2650	0.024	16 x 32	3010	0.022
				16 x 20	2530	0.027	18 x 25	2740	0.026
1500	13 x 25	2230	0.027	13 x 35	2880	0.020	16 x 36	3150	0.019
	13 x 30	2650	0.024	13 x 40	3350	0.017	16 x 40	3710	0.016
1800	16 x 20	2530	0.027	16 x 25	2930	0.021	18 x 32	3635	0.021
				18 x 20	2860	0.026			
2200	13 x 35	2880	0.020	16 x 32	3450	0.017	18 x 36	3680	0.017
	18 x 20	2860	0.026	18 x 25	3140	0.019			
2700	13 x 40	3350	0.017	16 x 36	3610	0.015	18 x 40	3800	0.014
	16 x 25	2930	0.021	18 x 32	4170	0.015			
3300	16 x 32	3450	0.017	16 x 40	4080	0.013			
	16 x 25	3140	0.019	18 x 36	4220	0.014			
3900	18 x 32	4170	0.015	18 x 40	4280	0.012			
4700	18 x 36	4220	0.014						
5600	18 x 40	4280	0.012						


Note : * I. D x L : mm

*2. Ripple Current : (mA r.m.s 105°C / 100KHz), Impedance (Ω Max25°C / 100KHz)

Miniature Size Aluminum Electrolytic Capacitors

SZ [Ultra Low ESR]

105°C Single-Ended Lead Aluminum Electrolytic Capacitors For High Frequency Applications

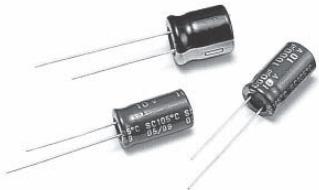

DESCRIPTION

Used in switching regulator applications in computers. Especially for high frequency.

Low impedance and E.S.R., high permissible ripple current at high frequency and higher operating temperature (-40°C to +105°C).

High Temperature Load Life at 105°C for 2000 Hours


Frequency coefficient

Frequency(Hz)	120	1K	10K	100K ≤
Factor	0.50	0.80	0.90	1.00


Temperature coefficient

Temperature(°C)	65	85	105
Factor	2.10	1.70	1.00

DIAGRAM OF DIMENSIONS

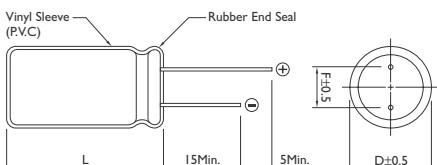

Rubber Stand-off

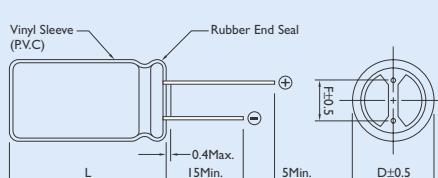

$L \leq 12$ $L + 1.5\text{Max.}$
 $13 \leq L \leq 15$ $L^{+1.0}_{-0.5}$
 $L \geq 16$ $L + 2.0\text{Max.}$

Dimensions : mm

Dø	F	dø
4.0	1.5	0.45
5.0	2.0	0.5
6.0	2.5	
8.0	3.5	
10.0	5.0	0.6
12.0		
13.0		
16.0	7.5	0.8
18.0		
22.0	10.0	0.8



CASE SIZE OF STANDARD PRODUCTS Dø ≥ 6mm with Safety Vent at Can Bottom

CAP. (μF) RATED VOLTAGE WV

CAP. (μF)	6.3 Ripple			10 Ripple			16 Ripple		
	SIZE	Ripple	ESR	SIZE	Ripple	ESR	SIZE	Ripple	ESR
470							8 x 11	1140	36
680				8 x 11	1140	36	8 x 15	1490	28
820	8 x 11	1140	36				10 x 12	1540	26
1000				8 x 15	1490	28	8 x 20	1870	19
				10 x 12	1540	26	10 x 15	2000	19
1200	8 x 15	1490	28						
1500	10 x 12	1540	26	8 x 20	1870	19	10 x 19	2550	13
				10 x 15	2000	19			
1800	8 x 20	1870	19	10 x 19	2550	13	10 x 22	2800	12
	10 x 15	2000	19						
2200	10 x 19	2550	13	10 x 22	2800	12			
3300	10 x 22	2800	12						

Note : * I. D x L : mm

*2. Ripple Current : (mA r.m.s 105°C / 100KHz), ESR (MΩ Max25°C / 100KHz)

Miniature Size Aluminum Electrolytic Capacitors

SQ [High Temperature for +125°C]

125°C Single-Ended Lead Aluminum Electrolytic Capacitors For High Frequency Applications



DESCRIPTION

Wide operating temperature range it as long load life product at 125°C

Suit for use in DC or pulse circuits in various electronic and industrial

ELECTRICAL CHARACTERISTICS

Operating Temperature : -40° ~ +125°C

Working Voltage : 10 ~ 50V

Rate Capacitance Range : 4.7 ~ 3900μF

Capacitance Tolerance : -20 ~ +20%

DC Leakage Current (μA) : $I \leq 0.03 CV(\mu A)$ or $4\mu A$ Whichever is greater.

(Measurements shall be Made After a 2 Minute Charge at Rated Working Voltage)

Dissipation Factor : at 120 Hz, 25°C

WV (V) :	10	16	25	35	50	-
D.F (%) :	15	12	10	10	8	-

Value in () are applicable for products which dimensions are in ().

WV (V) :	Rated Voltage (V)	10	16	25	35	50
----------	-------------------	----	----	----	----	----

Impedance :	$Z - 25^\circ C / Z + 20^\circ C$	3	2	2	2	2
-------------	-----------------------------------	---	---	---	---	---

Impedance :	$Z - 40^\circ C / Z + 20^\circ C$	6	4	4	4	4
-------------	-----------------------------------	---	---	---	---	---

Load Life : 1000 Hours at 125°C Assured with Full Rated Maximum Ripple Current Applied

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement

(c) Leakage Current : Not Exceed the Initial Requirement


Shelf Life : 1000 Hours, No Voltage Applied, at 125°C

(a) Capacitance Change : Within 20% of Initial Value


(b) Dissipation Factor : Not Exceed 200 % of Initial Requirement

(c) Leakage Current : Not Exceed 200% of Initial Requirement

DIAGRAM OF DIMENSIONS

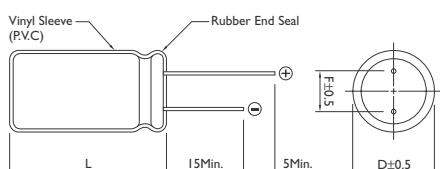

Rubber Stand-off

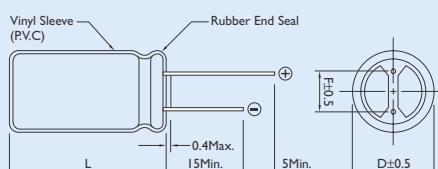

$L \leq 12 \quad L + 1.5\text{Max.}$
 $13 \leq L \leq 15 \quad L^{+0}_{-0.5}$
 $L \geq 16 \quad L + 2.0\text{Max.}$

Dimensions : mm

Dø	F	dø
4.0	1.5	0.45
5.0	2.0	0.5
6.0	2.5	
8.0	3.5	
10.0	5.0	0.6
12.0		
13.0		
16.0	7.5	0.8
18.0		
22.0	10.0	0.8



CASE SIZE & PERMISSIBLE RIPPLE CURRENT OF STANDARD PRODUCTS


CAP. (μF)	RATED VOLTAGE WV			
	10	16	25	35
0.47				8 x 11
1				8 x 11
2.2				8 x 11
3.3				8 x 11
4.7				8 x 11
10				8 x 11
22				8 x 11 10 x 12
33			8 x 11 10 x 12	10 x 15
47		8 x 11 10 x 12	10 x 15	10 x 19
100	10 x 12	10 x 15	10 x 19	13 x 20 13 x 25
220	10 x 19	13 x 20	13 x 25	16 x 25
330	13 x 20	13 x 25	16 x 25	
470	13 x 25	16 x 25		
1000			16 x 32	
2200			16 x 32	
3900			18 x 36	

Note : * I. D x L : mm

Miniature Size Aluminum Electrolytic Capacitors

SV [For adapter and power supply applications Series]

105°C Single-Ended Lead Aluminum Electrolytic Capacitors For High Frequency Applications

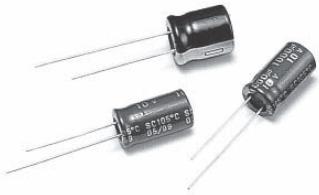

DESCRIPTION

Used in switching regulator applications in computers. Especially for high frequency.

Low impedance and E.S.R., high permissible ripple current at high frequency and higher operating temperature (-40°C to +105°C).


Frequency coefficient

Frequency(Hz)	120	500	1K	10K~100K
Coefficient	1.00	1.20	1.40	1.50

Temperature coefficient

Temperature(°C)	65	85	105
Factor	2.10	1.70	1.00

DIAGRAM OF DIMENSIONS

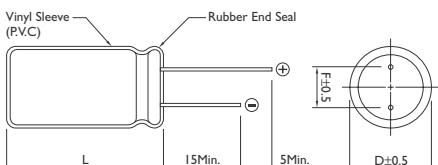

ELECTRICAL CHARACTERISTICS

Operating Temperature : -40° ~ +105°C -25° ~ +105°C

Working Voltage : 200V 400V

Rate Capacitance Range : 22 ~ 220μF 10 ~ 150μF

Capacitance Tolerance : -20 ~ +20%

DC Leakage Current (μA) : $I = 0.06 CV + 10(\mu A)$

whichever is greater; (After 2 minutes application of rated voltage at 25°C)

Dissipation Factor : at 120 Hz, 25°C

WV (V) : 200 400

D.F (%) : 15 20

WV (V) : 200 400

Impedance : $Z - 25^{\circ}\text{C} / Z + 20^{\circ}\text{C}$ 3 5

Impedance : $Z - 40^{\circ}\text{C} / Z + 20^{\circ}\text{C}$ 6 —

Load Life : After apply rated voltage with rated ripple current for 2000hrs at 105°C the capacitors shall meet the following requirements.

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement

(c) Leakage Current : Not Exceed the Initial Requirement


Shelf Life : 1000 Hours, No Voltage Applied, at 105°C

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200 % of Initial Requirement

(c) Leakage Current : Not Exceed 200% of Initial Requirement

Rubber Stand-off

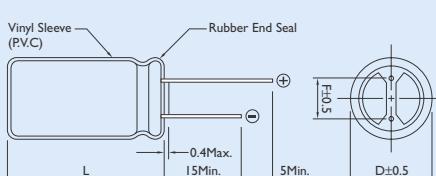

$L \leq 12$ $L + 1.5\text{Max.}$
 $13 \leq L \leq 15$ $L^{+0.0}_{-0.5}$
 $L \geq 16$ $L + 2.0\text{Max.}$

Dimensions : mm

Dø	F	dø
4.0	1.5	0.45
5.0	2.0	0.5
6.0	2.5	
8.0	3.5	
10.0	5.0	0.6
12.0		
13.0		
16.0	7.5	0.8
18.0		
22.0	10.0	0.8



PERMISSIBLE RIPPLE CURRENT (mA, rms) at 105°C, 120Hz

CAP. (μF)	RATED VOLTAGE W/V			
	Size	200 Ripple	Size	400 Ripple
10			10 x 15	64
			10 x 19	120
			13 x 25	200
22	10 x 19	233	12 x 25	190
			13 x 25	225
			16 x 25	300
33	13 x 20	366	16 x 20	360
			16 x 25	400
			16 x 32	437
47	13 x 25	400	13 x 30	370
			16 x 25	450
			18 x 25	470
68	13 x 25	600	18 x 32	538
			13 x 40	480
			18 x 25	480
82			16 x 32	520
			18 x 32	520
	16 x 32	800	18 x 32	580
120			18 x 32	670
			18 x 32	670
			18 x 36	700
220	16 x 36	933		


Note : * I. D x L : mm

*2. Ripple Current : (mA r.m.s 105°C / 120Hz)

Miniature Size Aluminum Electrolytic Capacitors

SF [For Photo Flash Applications]

105°C Single-Ended Lead, 5.0mm Height Type Aluminum Electrolytic Capacitors

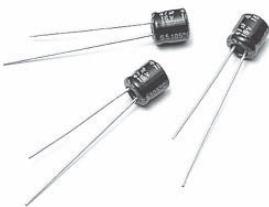

DESCRIPTION

Applications : Digital Camera

ELECTRICAL CHARACTERISTICS

Operating Temperature : -25° ~ +55°C

Working Voltage : 300, 330, 360V

Rate Capacitance Range : 36 ~ 300 μ F

Capacitance Tolerance : -10 ~ +20%

DC Leakage Current : $I = I \times C$ (μ A) max.(After 5 minute)

Dissipation Factor : Less than 0.06

Charge and Discharge Characteristics :

Test condition : For 5000 times at room temperature (5~35°C)

Charge & discharge cycles : 30 sec

Leakage current : $\leq 150\%$ of initial specified value

Capacitance change : within $\pm 10\%$ of initial value

$\tan \delta$ (DF) : $\leq 150\%$ of initial specified value

Shelf Life:

Storage without voltage applied at 55°C for 1000 hours and measured at 25°C


(a) Leakage current : $\leq 150\%$ of initial specified value

(b) Capacitance change : within $\pm 20\%$ of initial value

(c) $\tan \delta$ (DF) : $\leq 150\%$ of initial specified value

DIAGRAM OF DIMENSIONS

Dimensions : mm

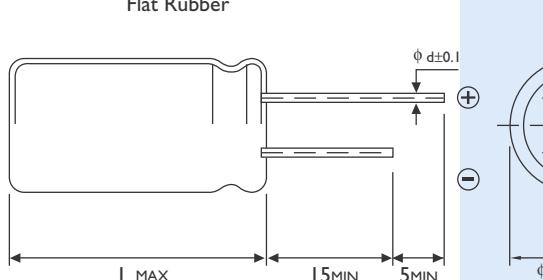

DØ	F	dØ
10	5.0	0.6
12.5	5.0	0.8
13	5.0	0.8
14.5	7.5	0.8
16	7.5	0.8
18	7.5	0.8
20	7.5	0.8



CASE SIZE & PERMISSIBLE RIPPLE CURRENT OF STANDARD PRODUCTS

CAP. (μF)	RATED VOLTAGE WV						
	10	12.5	13	14.5	16	18	20
36	10 x 27						
47	10 x 30	12.5 x 20					
60	10 x 34	12.5 x 23					
80		12.5 x 27					
100		12.5 x 34	13 x 34	14.5 x 26			
120		12.5 x 37	13 x 34	14.5 x 30	16 x 27		
140		12.5 x 42	13 x 39	14.5 x 33	16 x 29	18 x 25	
160		12.5 x 47	13 x 43	14.5 x 36	16 x 32	18 x 27	
180				14.5 x 40	16 x 35	18 x 29	
200				14.5 x 43	16 x 38	18 x 31	
220				14.5 x 47	16 x 40	18 x 33	
240					16 x 43	18 x 36	
250						18 x 37	20 x 31
300						18 x 42	20 x 35

Note : * I. D x L : mm

* 2. Flat Rubbet

LH [For 85°C, 2000 Hours Miniature]


For Printed Circuit Board High-Performance Aluminum Electrolytic Power Supply Input and Output Filter Capacitors

Miniature Size Aluminum Electrolytic Capacitors

ELECTRICAL CHARACTERISTICS

Operating Temperature Range	-40 to +85°C	-25 to +85°C
Rated Voltage Range	6.3 to 100VDC	160 to 450VDC
Capacitance Tolerance	±20% (at 25°C, 120Hz)	
Leakage Current	I = 0.02CV or 3mA Whichever is smaller. (At 25°C, After 5 Minutes Application of DC Working Voltage at 25°C)	
Dissipation Factor	Where: I: Leakage Current (μ A) C: Nominal Capacitance (μ F) V: Rated Voltage (V) Rate Voltage (V) 6.3 10 16 25 35 50~80 100 160~250 315~450 D.F (%) 60 50 40 25 25 20 15 10 * 15 Note: * (15%) For Case Size D = 35m/m or L = 20m/m (At 120Hz, 25°C) (WV = 6.3 ~ 100V For Capacitor Whose Capacitance Exceeds 1000 μ F The value of D.F(%) is increased by 2% for every addition of 1000 μ F. Rated Voltage(v) 6.3~16 25 35 50~63 80~100 160~400 450 Z(-25°C) / Z(20°C) 3 3 3 2 2 4 8 Z(-40°C) / Z(20°C) 12 10 8 6 5 - -	
Load Life	After the capacitors are subjected to DC with the full rated ripple current applied at 85°C for 2000 hours. The following specifications shall be satisfied when the capacitors are restored to 25°C the sum of DC voltage and peak AC voltage must not exceed their full rated voltage.	
Shelf Life	Capacitance Change ≤ ±20% of the Initial Value D.F (tanδ) ≤ 200% of the Initial Specified Value Leakage Current ≤ the Initial Specified Value The following specifications shall be satisfied when the capacitor are restored to 25°C after exposing them for 1000 hours at 85°C without voltage applied. Capacitance Change ≤ ±20% of the Initial Value D.F (%) ≤ 150% of the Intial Specified Value Leakage Current ≤ 150% of the Initial Specified Value	

DIAGRAM OF DIMENSIONS

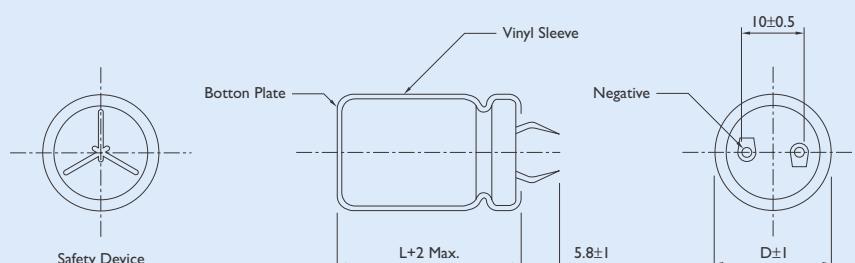

DESCRIPTION

LH type capacitors, size are combined with snap-lock terminals for easy to mount on P.C. Board.

They are ideally suitable to be used in switching.

Power Supplies and Orther Industrial or Commercial Applications

Multiplier for Ripple Current

Frequency coefficient


Frequency(Hz)	50	60	120	1K	10K~00K
6.3~100V	0.88	0.90	1.00	1.15	1.16
160~250V	0.75	0.78	1.00	1.16	1.23
350~450V	0.74	0.76	1.00	1.10	1.15

Temperature coefficient

Temperature(°C)	60	70	85
Factor	1.42	1.30	1.00

Unit : mm

Location of P.C.B. Holes

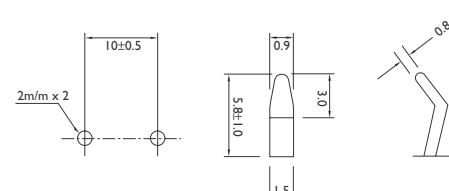



CASE SIZE OF STANDARD PRODUCTS AND PERMISSIBLE RIPPLE CURRENT

CAP. (μF)	RATED VOLTAGE WV					
	6.3	10	16	25		
	Size	Ripple	Size	Ripple	Size	Ripple
5600					22 x 25	2.20
6800					22 x 30	2.40
					25 x 25	2.45
8200			22 x 25	2.60	22 x 35	2.70
					25 x 25	2.75
10000			22 x 30	2.70	22 x 40	3.10
			25 x 25	2.75	25 x 30	3.15
					30 x 25	3.20
	22 x 25	2.40	22 x 30	2.90	22 x 45	3.50
12000			25 x 25	2.95	25 x 35	3.45
					30 x 30	3.50
					35 x 25	3.55
15000	22 x 25	2.44	22 x 30	2.75	22 x 50	4.00
			25 x 25	2.75	25 x 40	3.95
					30 x 35	4.00
					35 x 30	4.05
18000	22 x 30	2.60	22 x 35	3.15	22 x 40	3.70
	25 x 25	2.62	25 x 25	3.05	25 x 35	3.75
					30 x 30	3.80
22000	22 x 30	3.06	22 x 40	3.55	22 x 50	4.35
	25 x 25	3.07	25 x 30	3.50	25 x 40	4.30
			30 x 25	3.55	30 x 30	4.25
					35 x 25	4.20
27000	22 x 35	3.49	22 x 45	4.05	25 x 45	4.70
	25 x 30	3.52	25 x 35	4.00	30 x 35	4.65
	30 x 25	3.57	30 x 30	4.05	35 x 30	4.65
33000	22 x 40	3.97	22 x 50	4.60	30 x 40	5.35
	25 x 35	4.02	25 x 40	4.55	35 x 30	5.40
	30 x 30	4.05	30 x 30	4.50		
	35 x 25	4.10	35 x 25	4.50		
39000	22 x 50	4.56	25 x 45	5.10	30 x 45	6.00
	25 x 40	4.50	30 x 35	5.05	35 x 35	5.95
	30 x 30	4.46	35 x 30	5.05		
	35 x 25	4.51				
47000	25 x 45	5.09	25 x 50	5.75	30 x 50	6.80
	30 x 35	5.06	30 x 40	5.70	35 x 40	6.75
	35 x 30	5.03	35 x 30	5.65		
56000	25 x 50	5.71	30 x 45	6.45	35 x 45	7.60
	30 x 40	5.70	35 x 35	6.40		
	35 x 30	5.75				
68000	30 x 45	6.48	30 x 50	7.05	35 x 50	8.00
	35 x 35	6.42	35 x 40	7.10		
82000	30 x 50	7.32	35 x 50	7.50		
	35 x 40	7.29				
100000	35 x 45	8.31				
120000	35 x 50	8.60				

Note : *I. D x L : mm

*2. Ripple Current : (mA r.m.s 85°C / 120Hz)



CASE SIZE OF STANDARD PRODUCTS AND PERMISSIBLE RIPPLE CURRENT

CAP. (μF)	RATED VOLTAGE WV							
	35		50		63		80	
Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	
1200						22 × 25	1.65	
1500						22 × 30	1.90	
						25 × 25	1.90	
1800				22 × 25	1.85	22 × 35	2.20	
						25 × 30	2.20	
						30 × 25	2.20	
2200		22 × 25	1.90	22 × 30	2.30	22 × 40	2.45	
				25 × 25	2.30	25 × 30	2.45	
						30 × 25	2.50	
		22 × 30	2.10	22 × 35	2.45	22 × 45	2.80	
2700		25 × 25	2.20	25 × 30	2.45	25 × 35	2.80	
				30 × 25	2.50	30 × 30	2.85	
						35 × 25	2.85	
3000		22 × 30	2.35	22 × 40	2.60	22 × 50	3.15	
		25 × 25	2.35	25 × 30	2.65	25 × 40	3.20	
				30 × 25	2.70	30 × 30	3.20	
						35 × 25	3.20	
3900	22 × 25	2.20	22 × 35	2.65	22 × 45	2.95	25 × 45	3.60
			25 × 30	2.65	25 × 35	2.95	30 × 35	3.60
			30 × 25	2.65	30 × 30	3.00	35 × 30	3.60
4700	22 × 30	2.40	22 × 40	3.00	22 × 50	3.40	25 × 50	4.05
	25 × 25	2.40	25 × 35	3.00	25 × 40	3.35	30 × 40	4.05
			30 × 25	2.95	30 × 30	3.35	35 × 35	4.10
					35 × 25	3.40		
5600	22 × 35	2.75	22 × 45	3.35	25 × 45	3.70	30 × 45	4.55
	25 × 25	2.75	25 × 40	3.35	30 × 35	3.75	35 × 35	4.50
			30 × 30	3.35	35 × 30	3.75		
			35 × 25	3.40				
6800	22 × 40	2.85	22 × 50	3.80	30 × 40	4.25	30 × 50	5.15
	25 × 30	2.85	25 × 40	3.80	35 × 30	4.20	35 × 40	5.15
	30 × 25	2.90	30 × 30	3.80				
			30 × 35	3.85				
			35 × 30	3.85				
8200	22 × 45	3.15	25 × 50	4.35	30 × 45	4.80	35 × 45	5.85
	25 × 35	3.10	30 × 40	4.35	35 × 35	4.80		
	30 × 30	3.15	35 × 30	4.40				
10000	22 × 50	3.55	30 × 45	5.00	30 × 50	5.50	35 × 50	6.60
	25 × 40	3.50	35 × 35	4.95	35 × 40	5.45		
	30 × 30	3.45						
	35 × 25	3.40						
12000	25 × 45	3.95	30 × 50	5.60	35 × 45	6.20		
	30 × 35	4.00	35 × 40	5.55				
	35 × 30	4.05						
15000	25 × 50	4.95	35 × 45	6.45				
	30 × 40	4.95						
	35 × 35	5.00						
18000	30 × 45	5.50	35 × 50	6.70				
	35 × 40	5.55						
22000	30 × 50	6.00						
	35 × 45	6.05						
27000	35 × 50	6.90						

Note : *I. D × L : mm

*2. Ripple Current : (mA r.m.s 85°C / 120Hz)



CASE SIZE OF STANDARD PRODUCTS AND PERMISSIBLE RIPPLE CURRENT

CAP. (μF)	RATED VOLTAGE WV							
	100		160		180		200	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
180					22 × 20	1.00	22 × 25	0.95
220					22 × 25	1.10	22 × 25	1.10
			22 × 25	1.15	22 × 25	1.25	22 × 25	1.25
270					25 × 20	1.25	22 × 30	1.25
							25 × 25	1.25
			22 × 25	1.40	22 × 25	1.40	22 × 25	1.45
330			25 × 20	1.35	22 × 30	1.40	22 × 30	1.45
					25 × 25	1.40	25 × 25	1.45
			22 × 30	1.55	22 × 30	1.60	22 × 30	1.60
390			25 × 25	1.55	25 × 25	1.60	25 × 25	1.55
			30 × 25	1.50				
			22 × 30	1.75	22 × 35	1.80	22 × 35	1.80
470			25 × 25	1.75	25 × 30	1.80	25 × 30	1.80
			30 × 25	1.70	30 × 25	1.80	30 × 25	1.80
			22 × 30	1.95	22 × 35	2.00	22 × 40	2.00
560			25 × 30	1.95	22 × 40	2.00	25 × 35	2.00
			30 × 25	1.90	25 × 30	1.95	30 × 25	2.00
					30 × 25	2.00		
			22 × 40	2.20	22 × 45	2.25	22 × 45	2.35
680			25 × 30	2.20	25 × 35	2.20	25 × 35	2.30
			30 × 25	2.15	30 × 30	2.20	30 × 30	2.30
					30 × 25	2.20	35 × 25	2.30
	22 × 25	1.85	22 × 45	2.50	22 × 50	2.55	25 × 40	2.60
820			25 × 35	2.55	25 × 40	2.55	25 × 45	2.60
			30 × 30	2.50	30 × 30	2.60	30 × 30	2.60
			35 × 25	2.50	30 × 35	2.60	30 × 35	2.60
					35 × 25	2.60	35 × 30	2.60
	22 × 30	2.10	22 × 50	2.85	25 × 45	2.85	25 × 45	3.00
1000			25 × 40	2.80	30 × 35	2.85	25 × 50	3.00
			30 × 35	2.80	35 × 30	2.90	30 × 35	3.05
			35 × 25	2.80			30 × 40	3.05
							35 × 30	3.00
	22 × 35	2.40	25 × 45	3.15	30 × 40	3.25	25 × 50	3.30
1200			30 × 35	3.15	35 × 30	3.30	30 × 40	3.30
			35 × 30	3.20	35 × 35	3.30	30 × 45	3.30
							35 × 30	3.30
							35 × 35	3.30
	22 × 40	2.70	30 × 45	3.75	30 × 45	3.85	30 × 50	3.80
1500			35 × 30	3.70	35 × 35	3.80	35 × 40	3.80
			35 × 35	3.70	35 × 40	3.80		
	22 × 45	3.10	30 × 50	4.20	35 × 40	4.30	35 × 45	4.35
1800			35 × 40	4.20	35 × 45	4.30		
	22 × 50	3.50	35 × 40	4.60	35 × 45	4.90	35 × 45	4.95
2200			35 × 45	4.80	35 × 50	4.90	35 × 50	4.95
	25 × 45	4.10	35 × 50	5.45				
2700								
	30 × 35	4.05						
	35 × 25	4.05						
	25 × 50	4.50						
3300			30 × 40	4.55				
			35 × 30	4.50				
3900			30 × 45	5.15				
			35 × 35	5.10				
4700			35 × 40	5.75				
5600			35 × 50	6.20				

Note : *I. D × L : mm

*2. Ripple Current : (mA r.m.s 85°C / 120Hz)



CASE SIZE OF STANDARD PRODUCTS AND PERMISSIBLE RIPPLE CURRENT

CAP. (μF)	RATED VOLTAGE WV							
	250		350		400		450	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
47							22 x 25	0.50
56					22 x 20	0.55	25 x 25	0.65
68			22 x 20	0.55	22 x 25	0.60	22 x 30	0.70
					22 x 20	0.60	22 x 25	0.70
82			22 x 25	0.65	22 x 25	0.80	22 x 30	0.80
			25 x 20	0.65	25 x 20	0.80	25 x 25	0.80
			22 x 30	0.90	22 x 30	0.90	22 x 35	0.95
100			25 x 20	0.90	25 x 25	0.90	25 x 30	0.95
							30 x 25	0.95
	22 x 20	0.78	22 x 30	1.00	22 x 35	1.05	22 x 40	1.05
120			25 x 25	1.00	25 x 25	1.05	25 x 30	1.05
							30 x 25	1.05
	22 x 25	0.90	22 x 35	1.15	22 x 35	1.15	22 x 45	1.20
150			25 x 30	1.15	25 x 30	1.15	25 x 35	1.20
			30 x 25	1.15	30 x 25	1.15	30 x 30	1.20
	22 x 25	1.05	22 x 40	1.30	22 x 45	1.30	25 x 40	1.35
180	25 x 20	1.00	25 x 30	1.25	25 x 35	1.30	30 x 35	1.35
			30 x 25	1.25	30 x 30	1.35	35 x 25	1.35
	22 x 30	1.15	22 x 45	1.45	22 x 50	1.50	25 x 50	1.55
220	22 x 35	1.15	25 x 35	1.45	25 x 40	1.50	30 x 40	1.55
	25 x 25	1.15	30 x 30	1.45	30 x 30	1.50	35 x 30	1.55
			35 x 25	1.45	35 x 25	1.50		
	22 x 30	1.30	25 x 40	1.65	25 x 40	1.65	30 x 45	1.75
270	25 x 25	1.30	30 x 35	1.65	30 x 35	1.65	35 x 35	1.70
			35 x 25	1.65	35 x 30	1.65		
	22 x 35	1.50	25 x 50	1.80	25 x 50	1.90	30 x 50	2.00
330	25 x 25	1.50	30 x 40	1.80	30 x 40	1.90	35 x 40	2.00
	30 x 25	1.50	35 x 30	1.80	35 x 30	1.85		
	22 x 40	1.65	30 x 40	2.00	30 x 45	2.15	35 x 45	2.25
390	25 x 35	1.65	35 x 30	2.00	35 x 35	2.10		
	30 x 25	1.65						
	22 x 40	1.85	30 x 45	2.25	30 x 50	2.40	35 x 50	2.50
470	25 x 35	1.85	35 x 35	2.25	35 x 40	2.40		
	30 x 30	1.90						
	35 x 25	1.90						
	22 x 45	2.10	35 x 40	2.50	35 x 45	2.70		
560	25 x 40	2.10						
	30 x 30	2.10						
	35 x 25	2.10						
	25 x 45	2.45	35 x 45	2.90	35 x 50	2.90	35 x 60	2.9
680	30 x 35	2.45						
	35 x 30	2.45						
	30 x 45	2.75						
820	35 x 30	2.75						
	30 x 50	3.30						
1000	35 x 40	3.30						
	35 x 40	3.55						
1200	35 x 45	4.05						
1500								

Note : *I. D x L : mm

*2. Ripple Current : (mA r.m.s 85°C / 120Hz)

Miniature Size Aluminum Electrolytic Capacitors



DESCRIPTION (LG Series 105°C 2000 Hours Assured)

LG type capacitors are combined with snaplock terminals for easy to mount on P.C. Board.

They are ideally suitable to be used in switching power supplies and other industrial or commercial applications.

Multiplier for Ripple Current

Frequency coefficient


Frequency(Hz)	50	60	120	1K	10K~00K
6.3~100V	0.88	0.90	1.00	1.15	1.16
160~250V	0.85	0.88	1.00	1.15	1.20
315~450V	0.88	0.9	1.00	1.10	1.15

Temperature coefficient

Temperature(°C)	60	70	85	105
Factor	2.37	2.17	1.67	1.00

DIAGRAM OF DIMENSIONS

Location of P.C.B. Holes

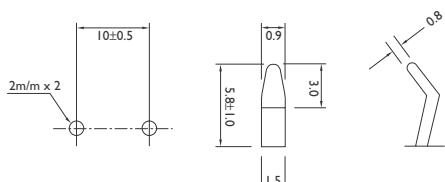


LG [For 105°C, 2000 Hours General]

For Printed Circuit Board High-Performance Aluminum Electrolytic Power Supply Input and Output Filter Capacitors

ELECTRICAL CHARACTERISTICS

Rated Voltage Range	6.3 to 100VDC	160 to 450VDC
Operating Temperature Range	-40 to +105°C	-25 to +105°C
Capacitance Tolerance	±20% (At 25°C, 120Hz)	
Leakage Current	I = 0.02CV, L = 20m/m, I = 0.03CV or 3mA Whichever is smaller. (At 25°C, After 5 Minutes)	
Dissipation Factor (tanδ)	Where, I: Leakage Current (μA) C: Nominal Capacitance (μF) V: Rated Voltage (V) Rate Voltage (V) 6.3 10 16 25 35 50~80 100 160~250 315~450 D.F (%) 60 50 40 25 25 20 15 10 * 15	
	* Note : 15% For D = 35m/m or L = 20m/m (At 25°C, 120Hz) (W V = 6.3 ~ 100V For Capacitor Whose Capacitance Exceeds 1000μF)	
Low Temperature Characteristics (120Hz)	The value of D.F (%) is increased by 2% for every addition of 1000μF.	
Load Life	The following specifications shall be satisfied when the capacitors are restored to 25°C after the rated voltage with maximum ripple current is applied for 2000 hours at 105°C.	
Shelf Life	Capacitance Change ≤ ±20% of the Initial Value D.F ≤ 200% of the Initial Specified Value Leakage Current ≤ the Initial Specified Value	
	The following specifications shall be satisfied when the capacitor are restored to 25°C after exposing them for 1000 hours at 105°C without voltage applied.	
	Capacitance Change ≤ ±20% of the Initial Value D.F ≤ 150% of the Initial Specified Value Leakage Current ≤ 150% of Initial Specified Value	

Unit : mm

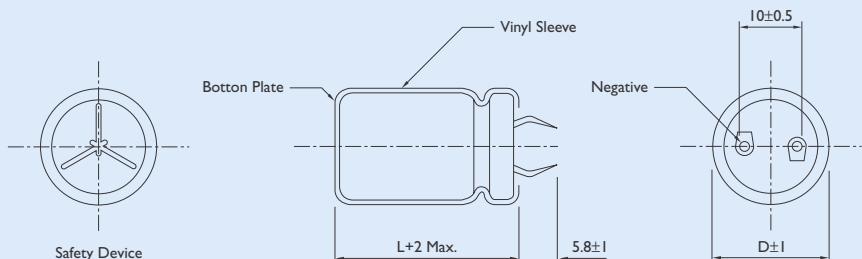



CASE SIZE OF STANDARD PRODUCTS AND PERMISSIBLE RIPPLE CURRENT

CAP. (μF)	RATED VOLTAGE WV							
	6.3		10		16		25	
Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	
4700						22 × 25	1.50	
5600						22 × 30	1.65	
6800				22 × 25	1.55	25 × 25	1.65	
8200				22 × 30	1.70	25 × 25	1.85	
				25 × 25	1.70	30 × 25	2.10	
		25 × 25	1.55	22 × 30	1.95	22 × 35	2.10	
10000				25 × 25	1.95	25 × 30	2.10	
	22 × 25	1.55	22 × 30	1.75	22 × 35	2.20	30 × 30	2.40
12000						25 × 30	2.25	
						30 × 25	2.30	
	22 × 30	1.70	22 × 30	1.90	22 × 40	2.55	30 × 30	2.40
15000	25 × 25	1.70	25 × 25	1.90	25 × 35	2.60	35 × 30	3.15
					30 × 30	2.60		
					35 × 25	2.65		
18000	22 × 30	1.95	22 × 35	2.20	22 × 45	2.90	25 × 50	3.55
	25 × 25	1.95	25 × 30	2.25	25 × 40	2.90	30 × 40	3.55
					30 × 30	2.90	35 × 35	3.55
					35 × 25	2.95		
22000	22 × 35	2.25	22 × 40	2.50	25 × 45	3.30	30 × 45	4.05
	25 × 30	2.25	25 × 35	2.55	30 × 35	3.30	35 × 35	3.80
	30 × 25	2.25	30 × 25	2.45	35 × 30	3.30		
27000	22 × 40	2.55	22 × 50	2.95	25 × 50	3.80	35 × 45	4.70
	25 × 35	2.55	25 × 40	2.90	30 × 40	3.75		
	30 × 30	2.55	30 × 30	2.85	35 × 30	3.75		
	35 × 25	2.55	35 × 25	2.80				
33000	22 × 45	2.90	25 × 45	3.30	30 × 45	4.30	35 × 50	5.40
	25 × 40	2.95	30 × 35	3.30	35 × 35	4.25		
	30 × 30	2.90	35 × 30	3.30				
	35 × 25	2.95						
39000	25 × 50	3.25	25 × 50	3.70	30 × 50	4.80		
	30 × 35	3.25	30 × 40	3.70	35 × 40	4.80		
	35 × 30	3.30	35 × 30	3.65				
47000	25 × 50	3.70	30 × 45	4.20	35 × 45	5.45		
	30 × 40	3.70	35 × 35	3.80				
56000	30 × 45	4.15	30 × 50	4.65				
	35 × 35	4.10	35 × 40	4.65				
68000	30 × 50	4.70	35 × 50	5.50				
	35 × 40	4.70						
82000	35 × 45	5.30						

Note : *I. D × L : mm

*2. Ripple Current : (mA r.m.s 105°C / 120Hz)



CASE SIZE OF STANDARD PRODUCTS AND PERMISSIBLE RIPPLE CURRENT

CAP. (μF)	RATED VOLTAGE WV							
	35		50		63		80	
Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	
820						22 × 25	1.10	
1000						22 × 30	1.20	
						25 × 25	1.20	
1200				22 × 25	1.20	22 × 30	1.40	
						25 × 25	1.40	
1500				22 × 30	1.30	22 × 35	1.60	
				25 × 25	1.30	25 × 30	1.60	
						30 × 25	1.65	
1800		22 × 25	1.30	22 × 30	1.50	22 × 40	1.80	
				25 × 25	1.50	25 × 35	1.85	
						30 × 25	1.80	
		22 × 30	1.55	22 × 35	1.70	22 × 45	2.05	
2200		25 × 25	1.55	25 × 30	1.75	25 × 35	2.00	
				30 × 25	1.80	30 × 30	2.05	
						35 × 25	2.05	
2700		22 × 30	1.70	22 × 40	2.00	25 × 45	2.35	
		25 × 25	1.70	25 × 35	2.00	30 × 35	2.35	
				30 × 25	1.95	35 × 30	2.35	
3300	22 × 25	1.40	22 × 35	1.95	22 × 50	2.30	25 × 50	2.70
			25 × 30	1.85	25 × 40	2.30	30 × 40	2.70
					30 × 30	2.25	35 × 30	2.55
					35 × 25	2.10		
3900	22 × 30	1.55	22 × 40	2.15	25 × 45	2.55	30 × 45	3.00
	25 × 25	1.55	25 × 35	2.20	30 × 35	2.55	35 × 35	3.00
			30 × 25	1.95	35 × 30	2.55		
4700	22 × 35	1.80	22 × 45	2.45	25 × 50	2.85	30 × 50	3.40
	25 × 25	1.80	25 × 40	2.45	30 × 40	2.85	35 × 40	3.40
			30 × 30	2.45	35 × 30	2.80		
			35 × 25	2.50				
5600	22 × 35	1.95	22 × 50	2.75	30 × 45	3.20	35 × 45	3.80
	25 × 30	1.95	25 × 40	2.70	35 × 35	3.20		
	30 × 25	2.00	30 × 35	2.75				
			35 × 30	2.75				
6800	22 × 40	2.20	25 × 50	3.30	30 × 50	3.65	35 × 50	3.90
	25 × 35	2.25	30 × 40	3.30	35 × 40	3.65		
	30 × 30	2.30	35 × 30	3.25				
	35 × 25	2.35						
8200	22 × 50	2.55	30 × 45	3.60	35 × 45	3.90		
	25 × 40	2.50	35 × 35	3.55				
	30 × 30	2.75						
	35 × 25	2.75						
10000	22 × 45	2.85	30 × 50	4.50	35 × 50	4.40		
	30 × 35	2.90	35 × 40	4.00				
	35 × 30	2.95						
12000	25 × 50	3.25	35 × 45	4.55				
	30 × 40	3.25						
	35 × 30	3.15						
15000	30 × 45	3.70						
	35 × 35	3.65						
18000	35 × 40	4.35						
22000	35 × 50	4.90						

Note : *I. D × L : mm

*2. Ripple Current : (mA r.m.s 105°C / 120Hz)



CASE SIZE OF STANDARD PRODUCTS AND PERMISSIBLE RIPPLE CURRENT

CAP. (μF)	RATED VOLTAGE WV							
	100		160		180		200	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
150							22 x 20	0.65
180					22 x 20	0.75	22 x 20	0.70
220			22 x 20	0.80	22 x 25	0.85	22 x 25	0.80
270			22 x 25	1.00	22 x 25	0.95	22 x 25	0.85
					25 x 20	0.90	25 x 25	0.85
330			22 x 25	1.20	22 x 25	1.20	22 x 30	1.20
			25 x 20	1.15	22 x 30	1.10	25 x 25	1.20
					25 x 25	1.10		
					22 x 30	1.30	22 x 30	1.30
390					25 x 25	1.30	22 x 35	1.30
							25 x 30	1.30
							30 x 25	1.30
					22 x 30	1.30	22 x 35	1.40
470					25 x 25	1.40	22 x 35	1.40
							22 x 40	1.40
560	22 x 25	1.05	22 x 40	1.50	22 x 40	1.50	22 x 45	1.55
			25 x 30	1.50	25 x 35	1.55	25 x 35	1.55
			30 x 25	1.50	30 x 25	1.50	30 x 30	1.55
680	22 x 25	1.20	22 x 45	1.70	22 x 45	1.70	22 x 50	1.75
			25 x 35	1.70	22 x 50	1.70	25 x 40	1.75
			30 x 25	1.70	25 x 35	1.70	30 x 30	1.75
					25 x 40	1.75	35 x 25	1.70
					30 x 30	1.70		
					35 x 25	1.70		
820	22 x 30	1.30	22 x 50	1.95	22 x 50	1.95	25 x 50	2.05
	25 x 25	1.33	25 x 40	2.00	25 x 40	2.00	30 x 35	2.00
			30 x 30	2.00	25 x 45	2.00	35 x 30	2.05
			35 x 25	1.90	30 x 35	2.00		
					35 x 25	1.90		
1000	22 x 35	1.50	25 x 45	2.20	25 x 45	2.20	20 x 40	2.30
	25 x 30	1.50	30 x 35	2.20	25 x 50	2.20	30 x 45	2.30
			35 x 30	2.20	30 x 35	2.25	35 x 30	2.30
					30 x 40	2.25	35 x 35	2.30
					35 x 30	2.25		
1200	22 x 40	1.70	25 x 50	2.45	25 x 50	2.45	30 x 50	2.60
	25 x 35	1.70	30 x 40	2.45	30 x 40	2.45	35 x 40	2.65
	30 x 25	1.70	35 x 30	2.45	30 x 45	2.50		
					35 x 35	2.50		
1500	22 x 45	1.95	30 x 45	2.80	30 x 45	2.80	35 x 45	3.10
	25 x 40	2.00	35 x 35	2.80	30 x 50	2.90		
	30 x 30	1.95			35 x 40	2.90		
	35 x 25	2.00						
1800	25 x 45	2.20	30 x 50	3.30	30 x 50	3.30	35 x 50	3.15
	30 x 35	2.50	35 x 45	3.30	35 x 50	3.30		
	35 x 30	2.45						
2200	25 x 50	2.55	35 x 50	3.75	35 x 50	3.60		
	30 x 40	2.70						
	35 x 30	2.55						
2700	30 x 45	2.90						
	35 x 35	2.85						
3300	30 x 50	3.25						
	35 x 40	3.25						
3900	35 x 40	3.70						
4700	30 x 50	3.80						
	35 x 50	3.80						

Note : *I. D x L : mm

*2. Ripple Current : (mA r.m.s 105°C / 120Hz)



CASE SIZE OF STANDARD PRODUCTS AND PERMISSIBLE RIPPLE CURRENT

CAP. (μF)	RATED VOLTAGE WV							
	250		350		400		450	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
47					22 x 20	0.35		
56			22 x 20	0.40	22 x 20	0.40	22 x 25	0.40
68			22 x 25	0.45	22 x 25	0.50	22 x 30	0.50
					25 x 20	0.50	25 x 25	0.50
			22 x 25	0.55	22 x 30	0.60	22 x 35	0.55
82			25 x 20	0.50	25 x 25	0.65	25 x 30	0.55
					22 x 30	0.60	30 x 25	0.55
100			22 x 30	0.70	22 x 35	0.65	22 x 40	0.65
			25 x 25	0.70	25 x 30	0.65	25 x 30	0.60
	22 x 20	0.60	22 x 35	0.75	22 x 35	0.70	30 x 25	0.65
120			25 x 30	0.75	25 x 30	0.70	25 x 35	0.70
			30 x 25	0.75	30 x 25	0.75	30 x 30	0.70
	22 x 25	0.65	22 x 40	0.80	22 x 40	0.80	22 x 50	0.80
150			25 x 30	0.80	25 x 30	0.85	25 x 40	0.80
			30 x 25	0.85	25 x 35	0.85	30 x 30	0.75
					30 x 30	0.85	35 x 25	0.75
	22 x 25	0.80	22 x 45	0.90	25 x 50	0.95	25 x 45	0.85
180	25 x 20	0.75	25 x 35	0.90	25 x 40	0.95	30 x 35	0.85
			30 x 30	0.90	30 x 30	0.90	35 x 30	0.85
	22 x 30	0.95	22 x 50	1.05	25 x 45	1.05	25 x 50	1.00
220	25 x 25	0.95	25 x 40	1.05	30 x 35	1.05	30 x 40	1.00
			30 x 30	1.00	35 x 30	1.10	35 x 30	1.00
			35 x 25	1.05				
	22 x 35	1.15	25 x 45	1.20	25 x 50	1.20	30 x 45	1.15
270	25 x 30	1.15	30 x 35	1.20	30 x 40	1.20	35 x 35	1.15
	30 x 25	1.15	35 x 30	1.20	35 x 35	1.20		
	22 x 40	1.25	30 x 40	1.35	30 x 45	1.40	30 x 50	1.40
330	25 x 30	1.20	35 x 35	1.35	35 x 35	1.35	35 x 40	1.40
	30 x 25	1.25						
	22 x 45	1.50	30 x 45	1.50	30 x 50	1.55	35 x 45	1.55
390	25 x 35	1.50	35 x 35	1.50	35 x 40	1.55		
	30 x 30	1.50						
	22 x 50	1.55	35 x 40	1.70	30 x 50	1.75	35 x 50	1.70
470	25 x 40	1.55			35 x 45	1.75		
	30 x 30	1.55						
	35 x 25	1.55						
	25 x 45	1.80	35 x 45	1.90	30 x 50	1.90		
560	30 x 35	1.80			35 x 45	1.90		
	35 x 30	1.80						
	25 x 50	1.95			35 x 50	2.15		
680	30 x 40	2.00						
	35 x 35	2.00						
820	30 x 45	2.15						
	35 x 35	2.10						
1000	35 x 40	2.30						
1500	35 x 50	3.63						

Note : *I. D x L : mm

*2. Ripple Current : (mA r.m.s 105°C / 120Hz)

Miniature Size Aluminum Electrolytic Capacitors



DESCRIPTION (LG Series 105°C 2000 Hours Assured)

LV type capacitors are combined with snaplock terminals for easy to mount on P.C. Board.

Highly reliable capacitors that withstand under high ripple current. Two to Four dimensions with same ratings. Aluminum case designed explosion-proof vent.

Best for switching power supplies.

Multiplier for Ripple Current

Frequency coefficient

Frequency(Hz)	60	120	1K	10~50K
10~100V	0.9	1.0	1.15	1.25
160~250V	0.8	1.0	1.25	1.47
315~450V	0.8	1.0	1.30	1.47

Temperature coefficient

Temperature(°C)	20~45	65	85	105
Factor	2-10	1.89	1.52	1.0



DIAGRAM OF DIMENSIONS

LV [For 105°C, 3000 Hours General]


For Printed Circuit Board High-Performance Aluminum Electrolytic Power Supply Input and Output Filter Capacitors

ELECTRICAL CHARACTERISTICS

Operating Temperature Range	-40 to +105°C										-25 to +105°C	
Rated Voltage Range	10 to 100VDC										160 to 450VDC	
Nominal Capacitance Range	47 to 56000μF											
Capacitance Tolerance	±20% (At 25°C, 120Hz)											
Leakage Current	$I = 3\sqrt{CV}$ (μA) after 5 minutes application of rated working voltage at +20°C											
Dissipation Factor (tanδ)	Rate Voltage (V)	10	16	25	35	50	63	80	100	160	250	315~450
	D.F (%)	55	50	45	40	35	30	25	20	15	15	25
	For capacitance value > 33000μF, add following calculated value :											
	$(\text{rated capacitance}) - 33000\mu\text{F}$ $\times 0.1$											
	10000μF											
Low Temperature Characteristics	Rated Voltage (V)	16~25	35	50	63~100	160	450					
(120Hz)	Z(-25°C) / Z(20°C)	6	6	4	3	8	8					
	Z(-40°C) / Z(20°C)	15	10	8	6	—	—					
High Temperature Loading	Test conditions											
	After 3000 hours application of rated voltage at +105°C											
	the capacitor shall meet the following limits											
	Post test requirements at +20°C											
	Leakage current : \leq Initial specified value											
	Capacitance Change : within $\pm 20\%$ of the Initial measured value											
	$\tan \delta$: $\leq 200\%$ of initial specified value											
Shelf Life	The following specifications shall be satisfied when the capacitor are restored to 25°C after exposing them for 1000 hours at 105°C without voltage applied.											
	Capacitance Change : $\leq \pm 20\%$ of the Initial Value											
	D.F : $\leq 200\%$ of the Initial Specified Value											
	Leakage Current : $\leq 200\%$ of Initial Specified Value											

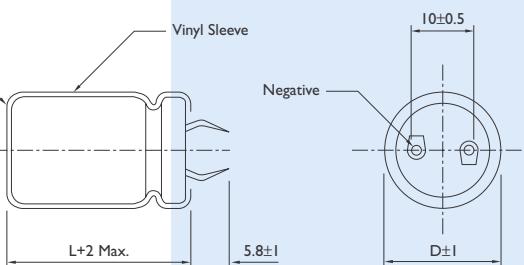

Location of P.C.B. Holes



Unit : mm



CASE SIZE OF STANDARD PRODUCTS AND PERMISSIBLE RIPPLE CURRENT

CAP. (μF) RATED VOLTAGE WV

CAP. (μF)	RATED VOLTAGE WV									
	10 Ripple	16 Ripple	25 Ripple	35 Ripple	50 Ripple	63 Ripple	Size	Size	Size	Size
1000										20 x 25 1.10
1200										20 x 30 1.20 22 x 25 1.20
1500								20 x 25 1.15		20 x 35 1.47 22 x 30 1.47
1800								20 x 30 1.39 22 x 25 1.34		20 x 35 1.58 22 x 30 1.58 25 x 25 1.52
2200								20 x 35 1.60 22 x 30 1.60		20 x 40 1.80 22 x 35 1.82 25 x 30 1.75
2700					20 x 25 1.29		20 x 35 1.73 22 x 30 1.70 25 x 25 1.70		22 x 40 2.07 25 x 35 2.11 30 x 25 1.72	
3300				20 x 30 1.57		20 x 35 1.78	20 x 40 1.97		22 x 45 2.33 25 x 35 2.27 30 x 30 2.24	
3900			20 x 25 1.58		20 x 35 1.78 22 x 30 1.69	22 x 40 2.22 25 x 30 2.20 30 x 25 1.95			25 x 40 2.51 30 x 35 2.55	
4700			20 x 30 1.65 22 x 25 1.61	20 x 40 2.02 22 x 35 2.02 25 x 25 1.62		22 x 45 2.43		25 x 50 2.91 30 x 40 2.86 35 x 30 2.80		
5600		20 x 25 1.68	20 x 35 1.85 22 x 30 1.80	22 x 35 2.13		22 x 50 2.75		30 x 40 3.22 35 x 35 3.20		
6800	20 x 25 1.31	20 x 30 1.80 22 x 25 1.75	20 x 40 2.11 22 x 35 2.09 25 x 25 1.87	22 x 40 2.41 25 x 35 2.31 30 x 25 2.31	22 x 45 2.43 25 x 35 2.43 30 x 30 2.25	25 x 45 3.30		30 x 50 3.65 35 x 40 3.65		
8200	20 x 30 1.59	20 x 35 2.08 22 x 30 2.00	22 x 40 2.31 25 x 30 2.34 30 x 25 2.16	22 x 50 2.85 25 x 40 2.73 30 x 30 2.75	22 x 45 2.43 25 x 35 2.43 30 x 30 2.25	30 x 40 3.60		35 x 45 4.04		
10000	20 x 30 1.88 22 x 25 1.77	20 x 40 2.15 22 x 30 2.10 25 x 25 2.05	22 x 45 2.65 25 x 35 2.61 30 x 30 2.61	25 x 45 3.05	30 x 50 4.05 35 x 40 4.04			35 x 50 4.48		
12000	20 x 35 2.18 22 x 30 2.10 25 x 25 1.94	22 x 35 2.31 25 x 30 2.30	22 x 50 2.80 25 x 40 2.81 30 x 30 2.74	25 x 50 3.37 30 x 40 3.23 35 x 30 3.19		35 x 45 4.56				
15000	20 x 40 2.27 22 x 35 2.23 25 x 30 2.10	22 x 40 2.68 25 x 35 2.58 30 x 25 2.30	25 x 45 3.27 30 x 35 3.13 35 x 30 3.26	30 x 45 3.72	35 x 50 4.77					
18000	22 x 40 2.41 25 x 30 2.34 30 x 25 2.25	22 x 50 3.20 25 x 40 3.16 30 x 30 2.57	30 x 40 3.56 35 x 35 3.84	35 x 40 4.37						
22000	22 x 45 2.58 25 x 35 2.54 30 x 30 2.50	25 x 45 3.36 30 x 30 2.98 35 x 30 3.25	30 x 45 4.04 35 x 35 3.75	35 x 45 4.92						
27000	22 x 50 3.17 25 x 40 3.07 30 x 30 2.95	25 x 50 3.85 30 x 35 3.30 35 x 35 3.93	35 x 45 4.74							
33000	25 x 45 3.39 30 x 35 3.33 35 x 30 3.21	30 x 40 3.80 35 x 35 4.27	35 x 50 5.50							
39000	30 x 40 3.70 35 x 35 3.68	30 x 45 4.30 35 x 40 4.80								
47000	30 x 45 4.22 35 x 40 4.16	30 x 50 4.81 35 x 45 5.53								
56000	35 x 50 5.00									

Note : *I. D x L : mm

*2. Ripple Current : (mA r.m.s 105°C / 120Hz)



CASE SIZE OF STANDARD PRODUCTS AND PERMISSIBLE RIPPLE CURRENT

CAP. (μF) RATED VOLTAGE WV

CAP. (μF)	RATED VOLTAGE WV											
	80 Ripple		100 Ripple		160 Ripple		180 Ripple		200 Ripple		220 Ripple	
Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	
180						20 x 25	0.81	20 x 25	0.83	20 x 25	0.81	
220						20 x 25	0.87	20 x 30	0.95	20 x 30	0.94	
270				20 x 25	0.87	22 x 25	0.97	22 x 25	0.99	22 x 30	1.09	
330				20 x 30	1.02	22 x 25	1.03	22 x 30	1.13	22 x 30	1.20	
				20 x 35	1.15	22 x 30	1.17	22 x 35	1.20	25 x 25	1.24	
390				20 x 35	1.17	25 x 25	1.33	25 x 30	1.34	25 x 25	1.26	
470				20 x 40	1.25	22 x 30	1.28	22 x 35	1.39	25 x 30	1.44	
				22 x 30	1.28	25 x 25	1.29	25 x 30	1.43	30 x 25	1.37	
			20 x 25	0.95	22 x 35	1.45	22 x 40	1.56	22 x 45	1.60	22 x 45	1.60
560				25 x 30	1.49	25 x 30	1.53	25 x 35	1.60	30 x 30	1.61	
				30 x 25	1.56	30 x 30	1.60	35 x 25	1.52			
680				20 x 30	1.15	22 x 40	1.64	22 x 45	1.76	22 x 50	1.75	
				22 x 25	1.09	25 x 35	1.70	25 x 35	1.76	25 x 40	1.76	
				30 x 25	1.63	30 x 30	1.74	30 x 30	1.74	35 x 30	1.72	
820	20 x 25	1.04	20 x 35	1.31	22 x 45	1.85	22 x 50	1.97	25 x 45	2.10	25 x 45	1.97
1000	22 x 25	1.19	22 x 30	1.32	25 x 40	1.92	25 x 40	1.99	30 x 35	2.11	30 x 40	2.06
				30 x 30	1.91	30 x 30	1.93	35 x 30	2.10	35 x 30	1.95	
1200	20 x 35	1.43	20 x 40	1.61	25 x 50	2.43	30 x 40	2.53	30 x 45	2.69	35 x 40	2.37
	22 x 30	1.44	22 x 35	1.69	30 x 40	2.48	35 x 35	2.54	35 x 35	2.53		
			25 x 30	1.68	35 x 30	2.25						
1500	20 x 35	1.57	22 x 40	1.97	30 x 45	2.82	30 x 50	3.03	35 x 40	2.97	35 x 45	2.64
	22 x 30	1.59	25 x 35	1.98	35 x 35	2.62	35 x 40	2.91				
			25 x 25	1.59	30 x 25	1.95						
1800	20 x 40	1.77	22 x 45	2.23	30 x 50	3.13	35 x 45	3.25	35 x 45	3.45		
	22 x 35	1.79	25 x 40	2.20	35 x 40	2.97						
			25 x 30	1.71	30 x 30	2.20						
2200	22 x 40	2.03	25 x 45	2.53	35 x 45	3.34	35 x 50	3.62				
	25 x 35	1.98	30 x 35	2.55								
	30 x 25	1.98	35 x 30	2.50								
2700	22 x 45	2.39	25 x 50	2.82								
	25 x 40	2.35	30 x 40	2.86								
	30 x 30	2.35	35 x 35	2.89								
3300	25 x 45	2.64	30 x 45	3.30								
	30 x 35	2.61	35 x 35	3.25								
	35 x 30	2.47										
3900	25 x 50	2.92	30 x 50	3.60								
	30 x 40	2.82	35 x 40	3.67								
	35 x 30	2.97										
4700	30 x 45	3.34	35 x 45	3.80								
	35 x 35	3.38										
5600	30 x 50	3.80	35 x 50	4.05								
	35 x 40	3.80										
6800	35 x 45	3.90										
8200	35 x 50	4.20										

Note : *I. D x L : mm

*2. Ripple Current : (mA r.m.s 105°C / 120Hz)



CASE SIZE OF STANDARD PRODUCTS AND PERMISSIBLE RIPPLE CURRENT

CAP. (μF)	RATED VOLTAGE WV													
	250		315		350		385		400		420			
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple		
47							20 × 25	0.37	20 × 25	0.40	20 × 25	0.40		
56							20 × 25	0.41	20 × 30	0.41	22 × 25	0.42		
68				20 × 25	0.41	20 × 30	0.44	20 × 30	0.48	20 × 30	0.48	20 × 35	0.47	
				22 × 25	0.45	22 × 25	0.49	22 × 25	0.50	22 × 30	0.50	25 × 25	0.50	
82			20 × 25	0.39	20 × 30	0.45	20 × 30	0.50	20 × 30	0.54	20 × 35	0.53	20 × 40	0.53
			22 × 30	0.52	22 × 30	0.56	22 × 30	0.56	22 × 30	0.56	22 × 35	0.56	25 × 30	0.57
100			20 × 30	0.45	20 × 30	0.51	20 × 35	0.56	20 × 35	0.60	20 × 35	0.58	22 × 40	0.64
			22 × 25	0.53	22 × 30	0.58	22 × 30	0.62	22 × 30	0.63	25 × 30	0.63	30 × 25	0.67
120			20 × 30	0.54	20 × 35	0.59	20 × 40	0.66	20 × 40	0.71	20 × 45	0.71	22 × 45	0.72
			22 × 25	0.56	22 × 30	0.61	22 × 35	0.68	22 × 35	0.73	22 × 35	0.73	25 × 35	0.71
			25 × 25	0.62	25 × 30	0.68	25 × 30	0.73	25 × 30	0.73	25 × 30	0.72	30 × 30	0.77
			20 × 25	0.71	20 × 35	0.64	20 × 40	0.70	22 × 40	0.79	22 × 40	0.85	22 × 45	0.86
150			22 × 30	0.66	22 × 35	0.73	25 × 30	0.78	25 × 35	0.85	25 × 35	0.83	25 × 40	0.82
			25 × 25	0.65	25 × 30	0.73	30 × 25	0.75	30 × 25	0.79	30 × 25	0.83	30 × 30	0.85
180			20 × 30	0.82	20 × 40	0.75	22 × 40	0.83	22 × 45	0.89	22 × 45	0.95	22 × 50	1.02
			22 × 25	0.84	22 × 35	0.78	25 × 30	0.80	25 × 35	0.86	25 × 35	0.92	25 × 40	0.94
			25 × 30	0.71	30 × 25	0.81	30 × 30	0.88	30 × 30	0.95	30 × 30	0.95	35 × 25	0.90
220			20 × 35	0.95	22 × 40	0.89	22 × 45	0.94	22 × 50	1.01	22 × 50	1.08	25 × 45	1.13
			22 × 30	0.97	25 × 30	0.85	25 × 35	0.92	25 × 40	1.00	25 × 40	1.05	30 × 35	1.09
			25 × 25	0.99	30 × 25	0.83	30 × 30	0.98	30 × 30	1.00	30 × 35	1.24	35 × 30	1.05
270			20 × 40	1.08	22 × 45	1.01	22 × 50	1.07	25 × 45	1.13	25 × 50	1.29	25 × 50	1.37
			22 × 35	1.11	25 × 35	0.98	25 × 40	1.05	30 × 40	1.14	30 × 40	1.30	30 × 40	1.25
			25 × 30	1.15	30 × 30	1.01	30 × 30	1.03	35 × 30	1.10	35 × 30	1.18	35 × 35	1.25
330			22 × 40	1.26	22 × 50	1.14	25 × 45	1.24	30 × 45	1.31	30 × 45	1.47	30 × 45	1.49
			25 × 30	1.26	25 × 40	1.12	30 × 35	1.24	35 × 35	1.32	35 × 35	1.41	35 × 35	1.42
			30 × 25	1.31	30 × 35	1.21	35 × 30	1.18					35 × 40	1.44
390			22 × 45	1.41	25 × 45	1.31	25 × 50	1.38	30 × 50	1.48	30 × 50	1.64	30 × 50	1.67
			25 × 35	1.42	30 × 35	1.30	30 × 40	1.39	35 × 40	1.48	35 × 40	1.59	35 × 40	1.61
			30 × 30	1.50	35 × 30	1.23	35 × 35	1.39						
470			22 × 50	1.58	30 × 40	1.53	30 × 45	1.57	35 × 45	1.76	35 × 45	1.87	35 × 45	1.86
			25 × 40	1.61	35 × 35	1.47	35 × 35	1.50					35 × 45	1.80
			30 × 30	1.61										
560			25 × 45	1.80	30 × 45	1.65	30 × 50	1.75	35 × 50	1.95	35 × 50	2.09		
			30 × 35	1.84	35 × 40	1.66	35 × 40	1.69						
680			25 × 50	2.03	35 × 45	1.96	35 × 45	1.96						
			30 × 40	2.09										
			35 × 30	1.96										
820			30 × 45	2.35	35 × 50	2.19								
			35 × 35	2.26										
1000			30 × 50	2.64										
			35 × 40	2.57										
1200			30 × 45	2.88										

Note : *I. D × L : mm

*2. Ripple Current : (mA r.m.s 105°C / 120Hz)

Surface Mount Aluminum Electrolytic

CA Series




FEATURE

For General Purposes Series with 85°C 2000 Hours



Suitable for AV (TV, Video, Audio), Personal Computer, Home Appliance

MARKING

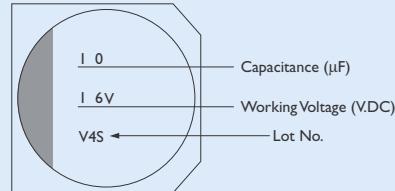

DIMENSIONS

Unit : mm

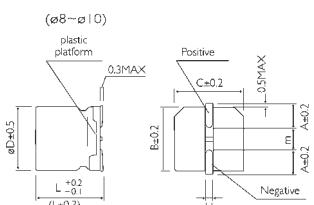

SIZE CODE	DØ	L	A	H	I	W	P	K
B	4.0	5.4	4.3	5.5 Max.	1.8	0.65 ± 0.1	1.0	0.35 ^{+ 0.15} _{- 0.20}
C	5.0	5.4	5.3	6.5 Max.	2.2	0.65 ± 0.1	1.5	0.35 ^{+ 0.15} _{- 0.20}
D	6.3	5.4	6.6	7.8 Max.	2.6	0.65 ± 0.1	2.2	0.35 ^{+ 0.15} _{- 0.20}
E	8.0	6.5	8.3	9.4 Max.	3.4	0.65 ± 0.1	2.2	0.35 ^{+ 0.15} _{- 0.20}
F	8.0	10.5	8.3	10.0 Max.	3.4	0.90 ± 0.2	3.1	0.70 ± 0.20
G	10.0	10.5	10.3	12.0 Max.	3.5	0.90 ± 0.2	4.6	0.70 ± 0.20
H	6.3	7.7	6.6	0.8 Max.	2.6	0.65 ± 0.1	2.2	0.35 ^{+ 0.15} _{- 0.20}



SPECIFICATION

ITEM	CHARACTERISTIC									
Operation Temperature Range	-40 to +85°C									
Rated Working Voltage Range	4 to 100VDC									
Rated Capacitance	Range = 0.1 ~ 1500μF									
Capacitance Tolerance	±20% (120Hz / +25°C)									
Leakage Current (25°C)	Polarized : $I \leq 0.01CV$ or 3 (μA) Whichever is greater after 2 minutes application of DC rated working voltage at 25°C.									
Dissipation Factor (tanδ) (120Hz / +25°C)	I : Leakage Current (μA)	C : Rated Capacitance (μF)	V : Working Voltage (V)							
	Polarized () : D.F of Downsize									
	WV (V)	4	6.3	10	16	25	35	50	63	100
	D.F	35	28	24	20	16	14	12	12	10
Low Temperature Stability	Impedance Ratio at 120Hz									
	Z(-25°C)	<Ø8	7	4	3	2	2	2	2	2
	/Z(+20°C)	≥Ø8	7	5	4	3	2	2	2	2
	Z(-40°C)	<Ø8	15	8	8	4	4	3	3	3
	/Z(+20°C)	≥Ø8	15	10	8	6	4	3	3	3
Shelf Life	At +85°C no voltage application after 1000 hours and then through the aging treatment, the capacitor shall meet limits for load life characteristics.									

CASE SIZE & MAX RIPPLE CURRENT

Max. Ripple Current (mA) r.m.s. (120Hz / +85°C)

POLARIZED										
μF	4	6.3	10	16	25	35	50	63	100	
0.1							4 × 5.4	1.0	4 × 5.4	1.0
0.22							4 × 5.4	2.0	4 × 5.4	2.3
0.33							4 × 5.4	2.8	4 × 5.4	3.5
0.47							4 × 5.4	4.0	4 × 5.4	5.0
1.0							4 × 5.4	8.4	4 × 5.4	10
2.2							4 × 5.4	13	4 × 5.4	15
3.3							4 × 5.4	17	4 × 5.4	20
4.7				4 × 5	23	4 × 5.4	16	4 × 5.4	18	4 × 5.4
10			4 × 5.4	28	4 × 5.4	30	4 × 5.4	24	4 × 5.4	20
22		4 × 5.4	28	5 × 5.4	33	5 × 5.4	38	5 × 5.4	39	6.3 × 5.4
33	4 × 5.4	28	4 × 5.4	34	4 × 5.4	44	5 × 5.4	46	6.3 × 5.4	43
47	4 × 5.4	33	4 × 5.4	40	5 × 5.4	47	5 × 5.4	52	6.3 × 5.4	40
56	5 × 5.4	42	5 × 5.4	46	5 × 5.4	50	5 × 5.4	57	6.3 × 5.4	46
100	5 × 5.4	56	5 × 5.4	47	5 × 5.4	54	6.3 × 5.4	65	6.3 × 5.4	80
150	6.3 × 5.4	79	6.3 × 5.4	71	6.3 × 7.7	76	6.3 × 7.7	135	8 × 10.5	192
220	6.3 × 5.4	96	6.3 × 7.7	95	6.3 × 7.7	150	6.3 × 7.7	150	8 × 10.5	232
330	6.3 × 7.7	152	6.3 × 7.7	150	8 × 10.5	240	8 × 10.5	270	8 × 10.5	284
470	6.3 × 7.7	200	8 × 10.5	265	8 × 10.5	290	8 × 10.5	307	10 × 10.5	393
680	8 × 10.5	284	8 × 10.5	318	10 × 10.5	374	10 × 10.5	374	10 × 10.5	396
1000	8 × 0.5	344	8 × 10.5	372	10 × 10.5	374	10 × 10.5	454	10 × 10.5	454
1500	10 × 10.5	347	10 × 10.5	489						

Surface Mount Aluminum Electrolytic

CB Series




FEATURE



For General Purposes Series with 105°C 1000 Hours

Suitable for AV (TV, Video, Audio), Personal Computer, Home Appliance

MARKING

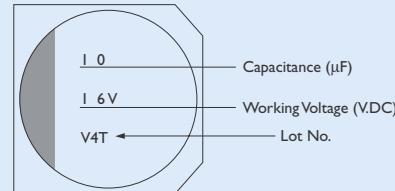

DIMENSIONS



Unit : mm

SIZE CODE	DØ	L	A	H	I	W	P	K
B	4.0	5.4	4.3	5.5 Max.	1.8	0.65 ± 0.1	1.0	0.35 ^{+ 0.15} _{- 0.20}
C	5.0	5.4	5.3	6.5 Max.	2.2	0.65 ± 0.1	1.5	0.35 ^{+ 0.15} _{- 0.20}
D	6.3	5.4	6.6	7.8 Max.	2.6	0.65 ± 0.1	2.2	0.35 ^{+ 0.15} _{- 0.20}
E	8.0	6.5	8.3	9.5 Max.	3.4	0.65 ± 0.1	2.2	0.35 ^{+ 0.15} _{- 0.20}
F	8.0	10.5	8.3	10.0 Max.	3.4	0.90 ± 0.2	3.1	0.70 ± 0.20
G	10.0	10.5	10.3	12.0 Max.	3.5	0.90 ± 0.2	4.6	0.70 ± 0.20
H	6.3	7.7	6.6	0.8 Max.	2.6	0.65 ± 0.1	2.2	0.35 ^{+ 0.15} _{- 0.20}



SPECIFICATION

ITEM	CHARACTERISTIC																								
Operation Temperature Range	-40 to +105°C																								
Rated Working Voltage Range	4 to 50V. DC																								
Rated Capacitance	Range = 0.1 ~ 1000μF																								
Capacitance Tolerance	±20% (120Hz / +25°C)																								
Leakage Current (25°C)	Polarized : $I \leq 0.01CV$ or 3 (μA) Whichever is greater after 2 minutes application of DC rated working voltage at 25°C. I : Leakage Current (μA) C : Rated Capacitance (μF) V : Working Voltage (V)																								
Dissipation Factor (tanδ) (120Hz / +25°C)	Polarized () : D.F. of Downsize <table> <thead> <tr> <th>WV (V)</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>D.F.</td> <td>35</td> <td>28</td> <td>24</td> <td>20</td> <td>16</td> <td>14</td> <td>12</td> </tr> </tbody> </table>	WV (V)	4	6.3	10	16	25	35	50	D.F.	35	28	24	20	16	14	12								
WV (V)	4	6.3	10	16	25	35	50																		
D.F.	35	28	24	20	16	14	12																		
Low Temperature Stability	Impedance Ratio at 120Hz <table> <thead> <tr> <th>WV (V)</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>Z(-25°C)/Z(+20°C)</td> <td>7</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-40°C)/Z(+20°C)</td> <td>15</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> </tr> </tbody> </table>	WV (V)	4	6.3	10	16	25	35	50	Z(-25°C)/Z(+20°C)	7	4	3	2	2	2	2	Z(-40°C)/Z(+20°C)	15	8	6	4	4	3	3
WV (V)	4	6.3	10	16	25	35	50																		
Z(-25°C)/Z(+20°C)	7	4	3	2	2	2	2																		
Z(-40°C)/Z(+20°C)	15	8	6	4	4	3	3																		
Load Life	After 1000 hours application of WV at 105°C, the capacitor shall meet following limits. <table> <tr> <td>Capacitance Change</td> <td>$\leq \pm 20\%$ of Initial Value</td> </tr> <tr> <td>Dissipation Factor</td> <td>$\leq 200\%$ of Initial Specified Value</td> </tr> <tr> <td>Leakage Current</td> <td>\leq Initial Specified Value</td> </tr> </table>	Capacitance Change	$\leq \pm 20\%$ of Initial Value	Dissipation Factor	$\leq 200\%$ of Initial Specified Value	Leakage Current	\leq Initial Specified Value																		
Capacitance Change	$\leq \pm 20\%$ of Initial Value																								
Dissipation Factor	$\leq 200\%$ of Initial Specified Value																								
Leakage Current	\leq Initial Specified Value																								
Shelf Life	At +105°C no voltage application after 1000 hours and then through the aging treatment, the capacitor shall meet limits for load life characteristics.																								

CASE SIZE & MAX RIPPLE CURRENT

Max. Ripple Current (mA) r.m.s. (120Hz / +85°C)

POLARIZED

μF	4	6.3	10	16	25	35	50
0.1							4×5.4 0.7
0.22							4×5.4 1.6
0.33							4×5.4 2.5
0.47							4×5.4 3.5
1.0							4×5.4 4
2.2							4×5.4 11
3.3						4×5.4 13	4×5.4 13
4.7					4×5.4 13	4×5.4 14	5×5.4 16
10					4×5.4 13	4×5.4 21	6.3×5.4 24
				4×5.4 18	5×5.4 20		
22		4×5.4 22	4×5.4 22	4×5.4 18	6.3×5.4 36	5×5.4 38	6.3×7.7 51
			4×5.4 25	5×5.4 37			
33	4×5.4 18	5×5.4 27	5×5.4 30	6.3×5.4 40	6.3×5.4 44	6.3×5.4 42	6.3×7.7 60
47	4×5.4 23	5×5.4 33	6.3×5.4 41	6.3×5.4 48	6.3×5.4 48	6.3×7.7 49	6.3×7.7 63
100	5×5.4 42	6.3×5.4 50	6.3×5.4 53	6.3×5.4 60	6.3×7.7 91	8×10.5 155	8×10.5 155
150	6.3×5.4 61	6.3×5.4 55	6.3×5.4 62	6.3×7.7 95	8×10.5 140	8×10.5 155	10×10.5 300
220	6.3×5.4 68	6.3×7.7 105	6.3×7.7 105	6.3×7.7 105	8×10.5 175	10×10.5 300	
330	6.3×7.7 73	6.3×7.7 105	8×10.5 175	8×10.5 195	10.5×10.5 220		
470	6.3×7.7 105	8×10.5 170	8×10.5 210	8×10.5 310			
680	8×10.5 210	8×10.5 210	10×10.5 230	10×10.5 350			
1000	8×10.5 260	10×10.5 230					