

Aluminum Capacitors Radial Miniature Long Life


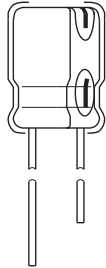


Fig.1 Component outline.



FEATURES

- Polarized aluminum electrolytic capacitors, non-solid electrolyte
- Radial leads, cylindrical aluminum case with pressure relief, insulated with a blue vinyl sleeve
- Charge and discharge proof
- Miniaturized, high CV-product per unit volume
- Very long useful life: 3000 to 4000 hours at 105 °C, high reliability
- Lead (Pb)-free versions are RoHS compliant.

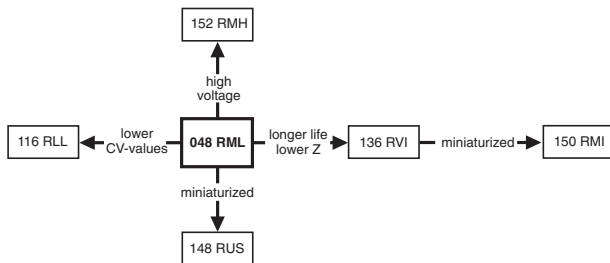

RoHS*
COMPLIANT

APPLICATIONS

- EDP, telecommunication, industrial, automotive and audio-video
- Smoothing, filtering, buffering in SMPS, timing
- Portable and mobile equipment (small size, low mass).

MARKING

The capacitors are marked (where possible) with the following information:

- Rated capacitance (in μF).
- Tolerance on rated capacitance, code letter in accordance with IEC 60062 (M for $\pm 20\%$).
- Rated voltage (in V).
- Date code, in accordance with IEC 60062.
- Code indicating factory of origin.
- Name of manufacturer.
- Upper category temperature (105 °C).
- Negative terminal identification.
- Series number (048).

| QUICK REFERENCE DATA | |
|--|-----------------------------|
| DESCRIPTION | VALUE |
| Nominal case sizes ($\varnothing D \times L$ in mm) | 10 × 12 to 18 × 35 |
| Rated capacitance range, C_R | 100 to 10 000 μF |
| Tolerance on C_R | $\pm 20\%$ |
| Rated voltage range, U_R | 6.3 to 63 V |
| Category temperature range | -40 to +105 °C |
| Endurance test at 105 °C | 2000 hours |
| Useful life at 105 °C | |
| case $\varnothing D = 10$ and 12.5 mm | 3000 hours |
| case $\varnothing D = 16$ and 18 mm | 4000 hours |
| Useful life at 40 °C, $1.6 \times I_R$ applied | |
| case $\varnothing D = 10$ and 12.5 mm | 200 000 hours |
| case $\varnothing D = 16$ and 18 mm | 260 000 hours |
| Shelf life at 0 V, 105 °C | 1000 hours |
| Based on sectional specification | IEC 60384-4/EN130300 |
| Climatic category IEC 60068 | 40/105/56 |

| SELECTION CHART FOR C_R , U_R AND RELEVANT NOMINAL CASE SIZES ($\varnothing D \times L$ in mm) | | | | | | | | |
|---|-----------|-----------|-----------|-----------|-----------|---------|-----------|-----------|
| C_R (μF) | U_R (V) | | | | | | | |
| | 6.3 | 10 | 16 | 25 | 35 | 40 | 50 | 63 |
| 100 | - | - | - | - | - | - | - | 10 × 12 |
| 220 | - | - | - | - | 10 × 12 | - | 10 × 16 | 10 × 20 |
| 330 | - | - | - | - | - | - | - | 12.5 × 20 |
| 470 | - | - | 10 × 12 | 10 × 16 | 10 × 20 | - | 12.5 × 20 | 12.5 × 25 |
| 1000 | - | 10 × 16 | 10 × 20 | 12.5 × 20 | 12.5 × 25 | - | 16 × 25 | 16 × 31 |
| 2200 | - | 12.5 × 20 | 12.5 × 25 | 16 × 25 | 16 × 31 | 16 × 35 | 18 × 35 | 18 × 35 |
| 3300 | - | 12.5 × 25 | 16 × 25 | 16 × 31 | 18 × 35 | 18 × 35 | 18 × 35 | - |
| 4700 | - | 16 × 25 | 16 × 31 | 18 × 35 | 18 × 35 | - | - | - |
| 6800 | 16 × 25 | 16 × 31 | 16 × 35 | - | - | - | - | - |
| 10000 | 16 × 35 | 18 × 35 | 18 × 35 | - | - | - | - | - |

* Pb containing terminations are not RoHS compliant, exemptions may apply

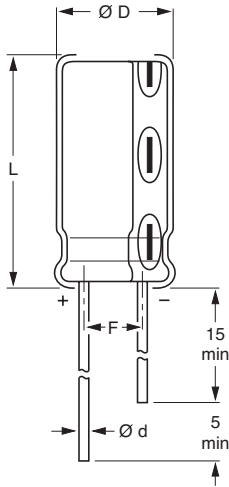
DIMENSIONS in millimeters, **AND AVAILABLE FORMS**


Fig.2 Form CA: Long leads.

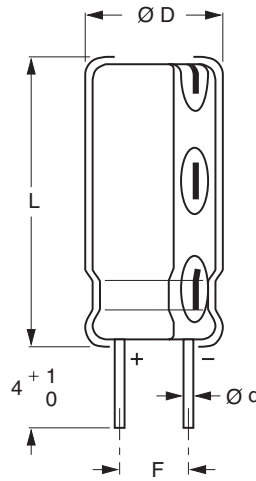


Fig.2 Form CB: Cut leads.

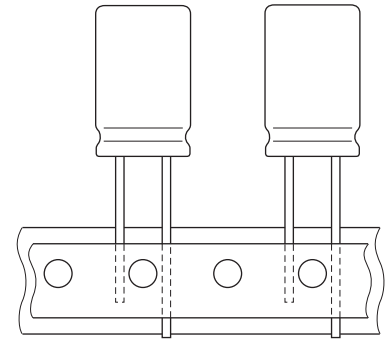


Fig.4 Form TFA: Taped in box (ammopack).

Table 1

| DIMENSIONS in millimeters, MASS AND PACKAGING QUANTITIES | | | | | | | | | |
|--|-----------|-----------------|-----------------------|-----------|----------|----------|----------------------|---------|----------|
| NOMINAL CASE SIZE $\varnothing D \times L$ | CASE CODE | $\varnothing d$ | $\varnothing D_{max}$ | L_{max} | F | MASS (g) | PACKAGING QUANTITIES | | |
| | | | | | | | FORM CA | FORM CB | FORM TFA |
| 10 × 12 | 14 | 0.6 | 10.5 | 13.5 | 5.0 ±0.5 | ≈1.6 | 1000 | 500 | 800 |
| 10 × 16 | 15 | 0.6 | 10.5 | 17.5 | 5.0 ±0.5 | ≈1.9 | 500 | 500 | 800 |
| 10 × 20 | 16 | 0.6 | 10.5 | 22.0 | 5.0 ±0.5 | ≈2.2 | 500 | 500 | 800 |
| 12.5 × 20 | 17 | 0.6 | 13.0 | 22.0 | 5.0 ±0.5 | ≈4.0 | 500 | 500 | 500 |
| 12.5 × 25 | 18 | 0.6 | 13.0 | 27.0 | 5.0 ±0.5 | ≈5.0 | 250 | 250 | 500 |
| 16 × 25 | 19 | 0.8 | 16.5 | 27.0 | 7.5 ±0.5 | ≈8.0 | 250 | 250 | 250 |
| 16 × 31 | 20 | 0.8 | 16.5 | 33.5 | 7.5 ±0.5 | ≈9.0 | 100 | 100 | 250 |
| 16 × 35 | 21 | 0.8 | 16.5 | 37.5 | 7.5 ±0.5 | ≈11.5 | 100 | 100 | – |
| 18 × 35 | 22 | 0.8 | 18.5 | 37.5 | 7.5 ±0.5 | ≈14.5 | 100 | 100 | – |

Note

- Detailed tape dimensions see section 'PACKAGING'.



| ELECTRICAL DATA | |
|-----------------|---|
| SYMBOL | DESCRIPTION |
| C_R | rated capacitance at 100 Hz, tolerance $\pm 20\%$ |
| I_R | rated RMS ripple current at 100 Hz, 105 °C |
| I_{L1} | max. leakage current after 1 minute at U_R |
| $\tan \delta$ | max. dissipation factor at 100 Hz |
| Z | max. impedance at 100 kHz |

Note

1. Unless otherwise specified, all electrical values in Table 2 apply at $T_{amb} = 20\text{ °C}$, $P = 86$ to 106 kPa , $RH = 45$ to 75% .

Table 2

| ELECTRICAL DATA AND ORDERING INFORMATION | | | | | | | | | |
|--|--------------------------------------|--|-----------------------------------|--|-------------------------|-------------------------------|-------------------------------|---------|----------|
| U_R (V) | C_R 100 Hz (μF) | NOMINAL CASE SIZE $\varnothing D \times L$ (mm) | I_R 100 Hz 105 °C (mA) | I_{L1} 1 min (μA) | $\tan \delta$ 100 Hz | Z 100 kHz (m Ω) | CATALOG NUMBER 2222 048 | | |
| | | | | | | | BULK PACKAGING | | TAPED |
| | | | | | | | FORM CA | FORM CB | FORM TFA |
| 6.3 | 6800 | 16 × 25 | 1350 | 430 | 0.32 | 56 | 53682 | 63682 | 33682 |
| | 10000 | 16 × 35 | 1700 | 630 | 0.40 | 42 | 53103 | 63103 | – |
| 10 | 1000 | 10 × 16 | 470 | 100 | 0.19 | 180 | 54102 | 64102 | 34102 |
| | 2200 | 12.5 × 20 | 800 | 220 | 0.21 | 90 | 54222 | 64222 | 34222 |
| | 3300 | 12.5 × 25 | 1000 | 330 | 0.23 | 68 | 54332 | 64332 | 34332 |
| | 4700 | 16 × 25 | 1270 | 470 | 0.25 | 56 | 54472 | 64472 | 34472 |
| | 6800 | 16 × 31 | 1550 | 680 | 0.29 | 45 | 54682 | 64682 | 34682 |
| | 10000 | 18 × 35 | 1870 | 1000 | 0.37 | 36 | 54103 | 64103 | – |
| 16 | 470 | 10 × 12 | 360 | 78 | 0.16 | 250 | 55471 | 65471 | 35471 |
| | 1000 | 10 × 20 | 600 | 160 | 0.16 | 140 | 55102 | 65102 | 35102 |
| | 2200 | 12.5 × 25 | 1000 | 360 | 0.18 | 70 | 55222 | 65222 | 35222 |
| | 3300 | 16 × 25 | 1220 | 530 | 0.20 | 56 | 55332 | 65332 | 35332 |
| | 4700 | 16 × 31 | 1500 | 760 | 0.22 | 45 | 55472 | 65472 | 35472 |
| | 6800 | 16 × 35 | 1690 | 1100 | 0.26 | 42 | 55682 | 65682 | – |
| | 10000 | 18 × 35 | 1980 | 1600 | 0.34 | 34 | 55103 | 65103 | – |
| 25 | 470 | 10 × 16 | 440 | 120 | 0.14 | 180 | 56471 | 66471 | 36471 |
| | 1000 | 12.5 × 20 | 720 | 250 | 0.14 | 100 | 56102 | 66102 | 36102 |
| | 2200 | 16 × 25 | 1120 | 550 | 0.16 | 56 | 56222 | 66222 | 36222 |
| | 3300 | 16 × 31 | 1450 | 830 | 0.18 | 45 | 56332 | 66332 | 36332 |
| | 4700 | 18 × 35 | 1720 | 1200 | 0.20 | 36 | 56472 | 66472 | – |
| 35 | 220 | 10 × 12 | 310 | 80 | 0.12 | 280 | 50221 | 60221 | 30221 |
| | 470 | 10 × 20 | 500 | 170 | 0.12 | 150 | 50471 | 60471 | 30471 |
| | 1000 | 12.5 × 25 | 900 | 350 | 0.12 | 75 | 50102 | 60102 | 30102 |
| | 2200 | 16 × 31 | 1340 | 770 | 0.14 | 45 | 50222 | 60222 | 30222 |
| | 3300 | 18 × 35 | 1600 | 1200 | 0.16 | 36 | 50332 | 60332 | – |
| | 4700 | 18 × 35 | 1950 | 1600 | 0.18 | 34 | 50472 | 60472 | – |
| 40 | 2200 | 16 × 35 | 1500 | 880 | 0.13 | 45 | 57222 | 67222 | – |
| | 3300 | 18 × 35 | 1600 | 1300 | 0.15 | 36 | 57332 | 67332 | – |
| 50 | 220 | 10 × 16 | 340 | 110 | 0.10 | 250 | 51221 | 61221 | 31221 |
| | 470 | 12.5 × 20 | 620 | 240 | 0.10 | 110 | 51471 | 61471 | 31471 |
| | 1000 | 16 × 25 | 1030 | 500 | 0.10 | 60 | 51102 | 61102 | 31102 |
| | 2200 | 18 × 35 | 1500 | 1100 | 0.12 | 50 | 51222 | 61222 | – |
| | 3300 | 18 × 35 | 1900 | 1700 | 0.14 | 40 | 51332 | 61332 | – |
| 63 | 100 | 10 × 12 | 240 | 66 | 0.09 | 310 | 58101 | 68101 | 38101 |
| | 220 | 10 × 20 | 400 | 140 | 0.09 | 200 | 58221 | 68221 | 38221 |
| | 330 | 12.5 × 20 | 550 | 210 | 0.09 | 120 | 58331 | 68331 | 38331 |
| | 470 | 12.5 × 25 | 700 | 300 | 0.09 | 80 | 58471 | 68471 | 38471 |
| | 1000 | 16 × 31 | 1150 | 630 | 0.09 | 49 | 58102 | 68102 | 38102 |
| | 2200 | 18 × 35 | 1600 | 1400 | 0.11 | 45 | 58222 | 68222 | – |

ORDERING EXAMPLE*

Electrolytic capacitor 048 series

2200 $\mu\text{F}/16\text{ V}$; $\pm 20\%$ Nominal case size: $\varnothing 12.5 \times 25\text{ mm}$; Form TFA


Catalog number: 2222 048 35222.

* To ensure delivery of lead (Pb)-free parts during the transition period, please contact your Vishay sales agent.




| ADDITIONAL ELECTRICAL DATA | | |
|------------------------------------|---|--|
| PARAMETER | CONDITIONS | VALUE |
| Voltage | | |
| Surge voltage | | $U_s \leq 1.15 U_R$ |
| Reverse voltage | | $U_{rev} \leq 1 V$ |
| Current | | |
| Leakage current | after 1 minute at U_R | $I_{L1} \leq 0.01 C_R \times U_R + 3 \mu A$ |
| | after 5 minutes at U_R | $I_{L5} \leq 0.002 C_R \times U_R + 3 \mu A$ |
| Inductance | | |
| Equivalent series inductance (ESL) | case $\varnothing D = 10 \text{ mm}$ | typ. 16 nH |
| | case $\varnothing D \geq 12.5 \text{ mm}$ | typ. 18 nH |
| Resistance | | |
| Equivalent series resistance (ESR) | calculated from $\tan \delta_{max}$ and C_R (see Table 2) | $ESR = \tan \delta / 2\pi f C_R$ |

CAPACITANCE (C)

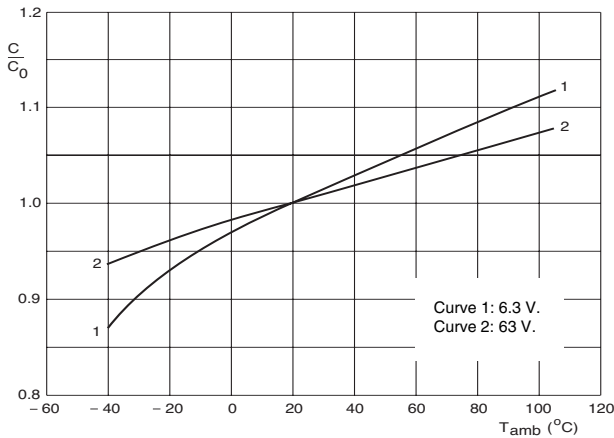

C₀ = typical capacitance at 20 °C, 100 Hz.


Fig.5 Typical multiplier of capacitance as a function of ambient temperature.

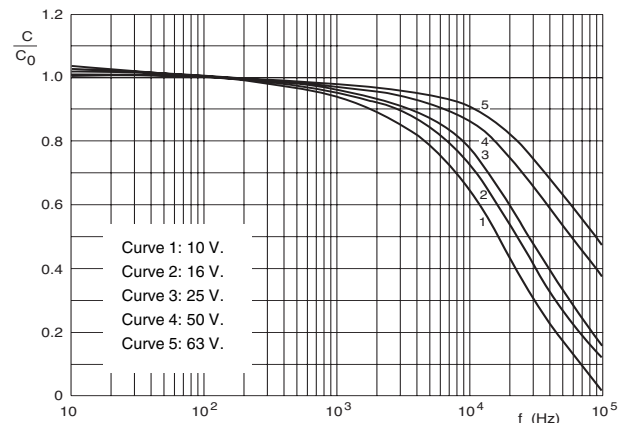

C₀ = typical capacitance at 20 °C, 100 Hz. T_{amb} = 20 °C.


Fig.6 Typical multiplier of capacitance as a function of frequency.

EQUIVALENT SERIES RESISTANCE (ESR)

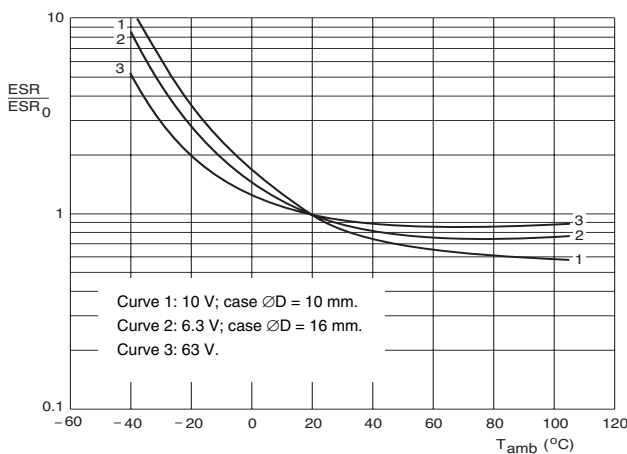

ESR₀ = typical ESR at 20 °C, 100 Hz.


Fig.7 Multiplier of ESR as a function of ambient temperature.

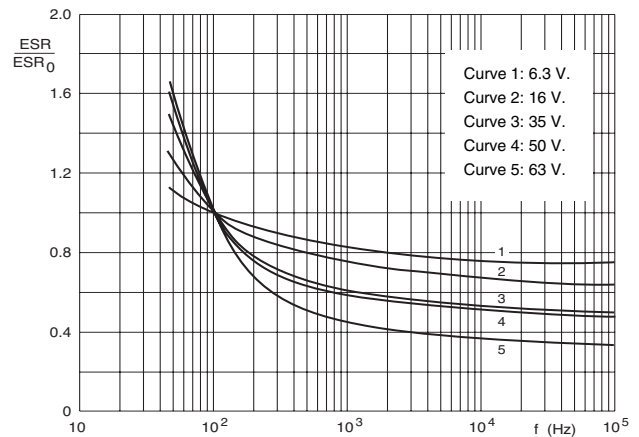

ESR₀ = typical ESR at 20 °C, 100 Hz.

Fig.8 Multiplier of ESR as a function of frequency.


IMPEDANCE (Z)

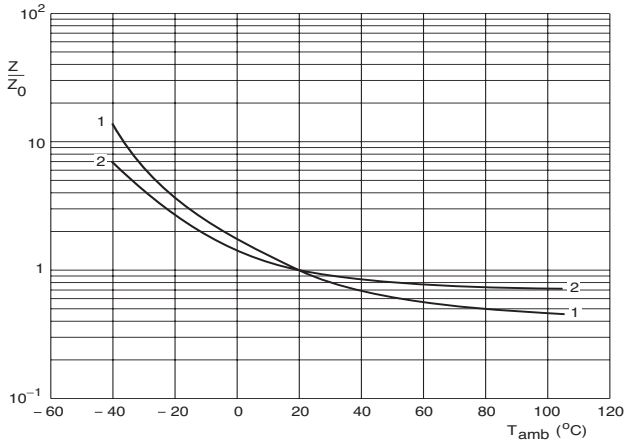

Curve 1: case $\varnothing D = 10$ mm.
Curve 2: case $\varnothing D = 16$ mm.


Z_0 = typical impedance at 20 °C, 10 kHz.

Fig.9 Typical multiplier of impedance as a function of ambient temperature.

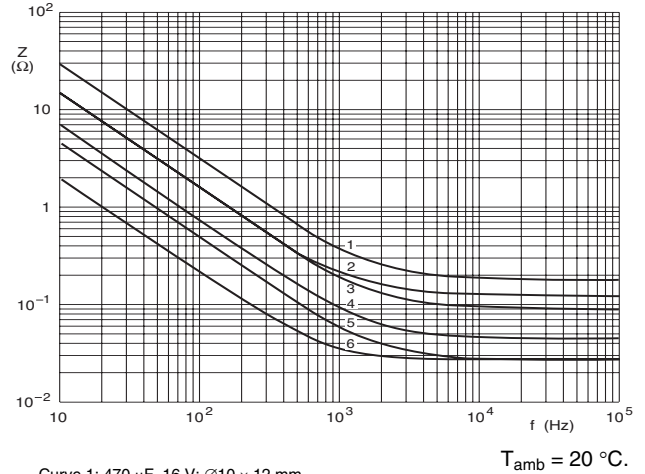


Curve 1: 470 μ F, 16 V; $\varnothing 10 \times 12$ mm.
Curve 2: 1000 μ F, 10 V; $\varnothing 10 \times 16$ mm.
Curve 3: 1000 μ F, 16 V; $\varnothing 10 \times 20$ mm.
Curve 4: 2200 μ F, 16 V; $\varnothing 12.5 \times 25$ mm.
Curve 5: 3300 μ F, 16 V; $\varnothing 16 \times 25$ mm.
Curve 6: 6800 μ F, 6.3 V; $\varnothing 16 \times 25$ mm.

Fig.10 Typical impedance as a function of frequency.

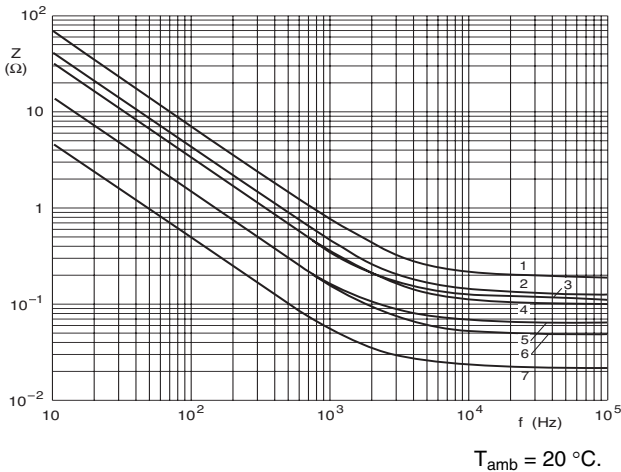


Curve 1: 220 μ F, 35 V; $\varnothing 10 \times 12$ mm.
Curve 2: 330 μ F, 35 V; $\varnothing 10 \times 16$ mm.
Curve 3: 470 μ F, 25 V; $\varnothing 10 \times 16$ mm.
Curve 4: 470 μ F, 35 V; $\varnothing 10 \times 20$ mm.
Curve 5: 1000 μ F, 25 V; $\varnothing 12.5 \times 20$ mm.
Curve 6: 1000 μ F, 35 V; $\varnothing 12.5 \times 25$ mm.
Curve 7: 3300 μ F, 25 V; $\varnothing 16 \times 31$ mm.

Fig.10 Typical impedance as a function of frequency.

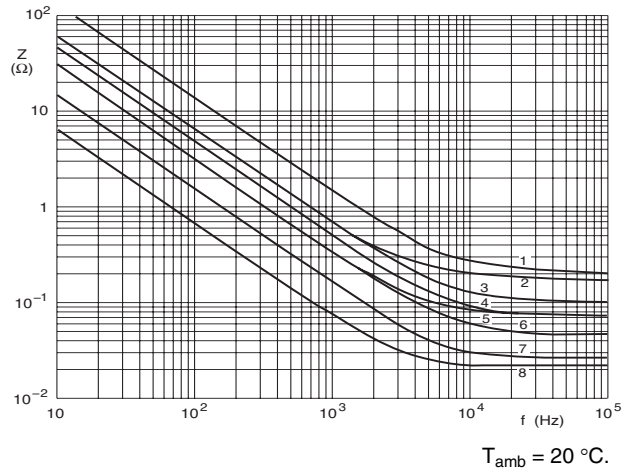

Curve 1: 100 μ F, 63 V; $\varnothing 10 \times 12$ mm.
Curve 2: 220 μ F, 50 V; $\varnothing 10 \times 16$ mm.
Curve 3: 220 μ F, 63 V; $\varnothing 10 \times 20$ mm.
Curve 4: 330 μ F, 63 V; $\varnothing 12.5 \times 20$ mm.
Curve 5: 470 μ F, 50 V; $\varnothing 12.5 \times 20$ mm.
Curve 6: 470 μ F, 63 V; $\varnothing 12.5 \times 25$ mm.
Curve 7: 1000 μ F, 63 V; $\varnothing 16 \times 31$ mm.
Curve 8: 2200 μ F, 40 V; $\varnothing 16 \times 35$ mm.

Fig.11 Typical impedance as a function of frequency.

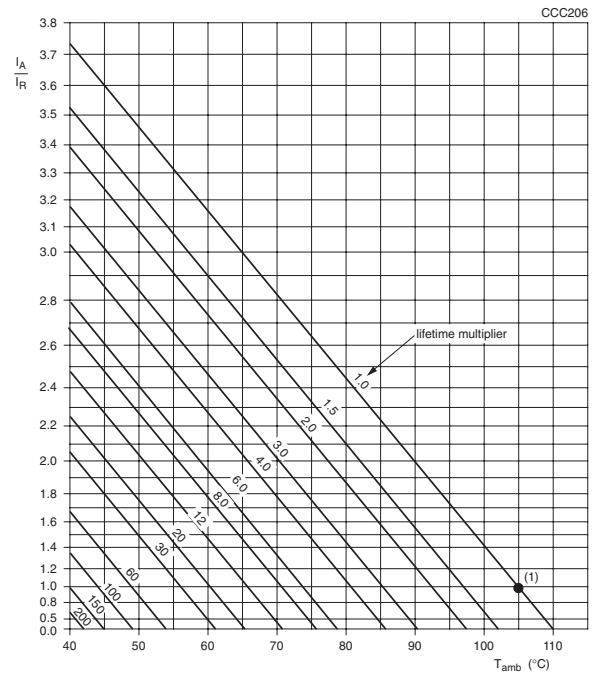RIPPLE CURRENT AND USEFUL LIFE


I_A = actual ripple current at 100 Hz.
 I_R = rated ripple current at 100 Hz, 105 °C.
 (1) Useful life at 105 °C and I_R applied (see table 4)

Fig.13 Multiplier of useful life as a function of ambient temperature and ripple current load.

Table 3

| MULTIPLIER OF RIPPLE CURRENT (I_R) AS A FUNCTION OF FREQUENCY | | | |
|---|-----------------------|-----------------------|-----------------------|
| FREQUENCY (Hz) | I_R MULTIPLIER | | |
| | $U_R = 6.3$ to 25 V | $U_R = 35$ and 40 V | $U_R = 50$ and 63 V |
| 50 | 0.95 | 0.85 | 0.80 |
| 100 | 1.00 | 1.00 | 1.00 |
| 300 | 1.07 | 1.20 | 1.25 |
| 1000 | 1.12 | 1.30 | 1.40 |
| 3000 | 1.15 | 1.35 | 1.50 |
| ≥ 10000 | 1.20 | 1.40 | 1.60 |

Table 4

| TEST PROCEDURES AND REQUIREMENTS | | | |
|--|--|--|--|
| TEST | | PROCEDURE (quick reference) | REQUIREMENTS |
| NAME OF TEST | REFERENCE | | |
| Endurance | IEC 60384-4/ EN130300 subclause 4.13 | $T_{amb} = 105$ °C; U_R applied; 2000 hours | $U_R \leq 6.3$ V; $\Delta C/C$: +15/-30% $U_R > 6.3$ V; $\Delta C/C$: $\pm 15\%$ $\tan \delta \leq 1.3 \times$ spec. limit $Z \leq 2 \times$ spec. limit $I_{L5} \leq$ spec. limit |
| Useful life | CECC 30301 subclause 1.8.1 | $T_{amb} = 105$ °C; U_R and I_R applied; case $\varnothing D = 10$ and 12.5 mm: 3000 hours case $\varnothing D = 16$ and 18 mm: 4000 hours | $U_R \leq 6.3$ V; $\Delta C/C$: +45/-50% $U_R > 6.3$ V; $\Delta C/C$: $\pm 45\%$ $\tan \delta \leq 3 \times$ spec. limit $Z \leq 3 \times$ spec. limit $I_{L5} \leq$ spec. limit no short or open circuit total failure percentage: $\leq 1\%$ |
| Shelf life (storage at high temperature) | IEC 60384-4/ EN130300 subclause 4.17 | $T_{amb} = 105$ °C; no voltage applied; 1000 hours after test: U_R to be applied for 30 minutes, 24 to 48 hours before measurement | $U_R \leq 6.3$ V; $\Delta C/C$: +15/-30% $U_R > 6.3$ V; $\Delta C/C$: $\pm 15\%$ $\tan \delta \leq 1.3 \times$ spec. limit $Z \leq 2 \times$ spec. limit $I_{L5} \leq 2 \times$ spec. limit |



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.