


## Capacitor, ceramic, 0.47 uF, +/-10% Tol, 50V, X7R, 1206

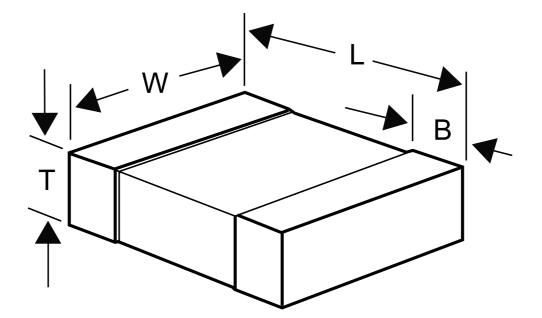

## **Dimensions (mm)**

ID	Dimension	Tolerance
L	3.20	+/-0.20
W	1.60	+/-0.20
т	0.9	+/-0.1
В	0.50	+/-0.25

## **Specifications**

KEMET 0.47 uF 1206 50V X7R +/-10% Std Chip Tin No 2.5%	
1206 50V X7R +/-10% Std Chip Tin No	
50V X7R +/-10% Std Chip Tin No	
X7R +/-10% Std Chip Tin No	
+/-10% Std Chip Tin No	
Std Chip Tin No	
Tin No	
No	
2 50/	
2.3%	
2.13 GOhm	
125V	
Regarding Aging Rate: Capacitance	
measurements (including tolerance	
indexed to a referee time of 1000 h	
T&R	
7in	
Plastic Tape	
4000	



© 2006-2011 IntelliData.net

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.