

# Screwdriver - SF-SL 0,6X3,5-100 S-VDE - 1212587

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Actuation tool, for ST terminal blocks, VDE insulated, with slimmer insulation integrated in the blade, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

## Product Features

- VDE-tested, for maximum safety
- In addition to standard applications, SF-SL ... screwdrivers are particularly suitable for modular terminal block assembly
- Because the insulation runs into the shaft, there is no protruding edge

## Key commercial data

<b>package_quantity</b>	10
<b>GTIN</b>	4046356590228

## Technical data

### Dimensions

<b>Length (b)</b>	181 mm
<b>Width (a)</b>	26 mm
<b>Blade thickness</b>	0.6 mm
<b>Blade width</b>	3.5 mm
<b>Blade height</b>	100 mm

### General

<b>Design</b>	Bladed
<b>Type</b>	Straight
<b>Material</b>	Alloyed tool steel
<b>Test standard</b>	DIN/ISO 2380-1 IEC 60900:2004

## classifications

### eCl@ss

<b>eCl@ss 4.0</b>	21040402
<b>eCl@ss 4.1</b>	21040402
<b>eCl@ss 5.0</b>	21040402
<b>eCl@ss 5.1</b>	21040402
<b>eCl@ss 6.0</b>	21040290
<b>eCl@ss 7.0</b>	21040290

# Screwdriver - SF-SL 0,6X3,5-100 S-VDE - 1212587

## classifications

### eCl@ss

eCl@ss 8.0	21040290
------------	----------

### ETIM

ETIM 4.0	EC000158
ETIM 5.0	EC000158

### UNSPSC

UNSPSC 6.01	27111701
UNSPSC 7.0901	27111701
UNSPSC 11	27111701
UNSPSC 12.01	27111701
UNSPSC 13.2	27111701

## approvals

---

VDE Zeichengenehmigung /

---


### Approval details

VDE Zeichengenehmigung 
--

## Drawings

# Screwdriver - SF-SL 0,6X3,5-100 S-VDE - 1212587

Dimensioned drawing

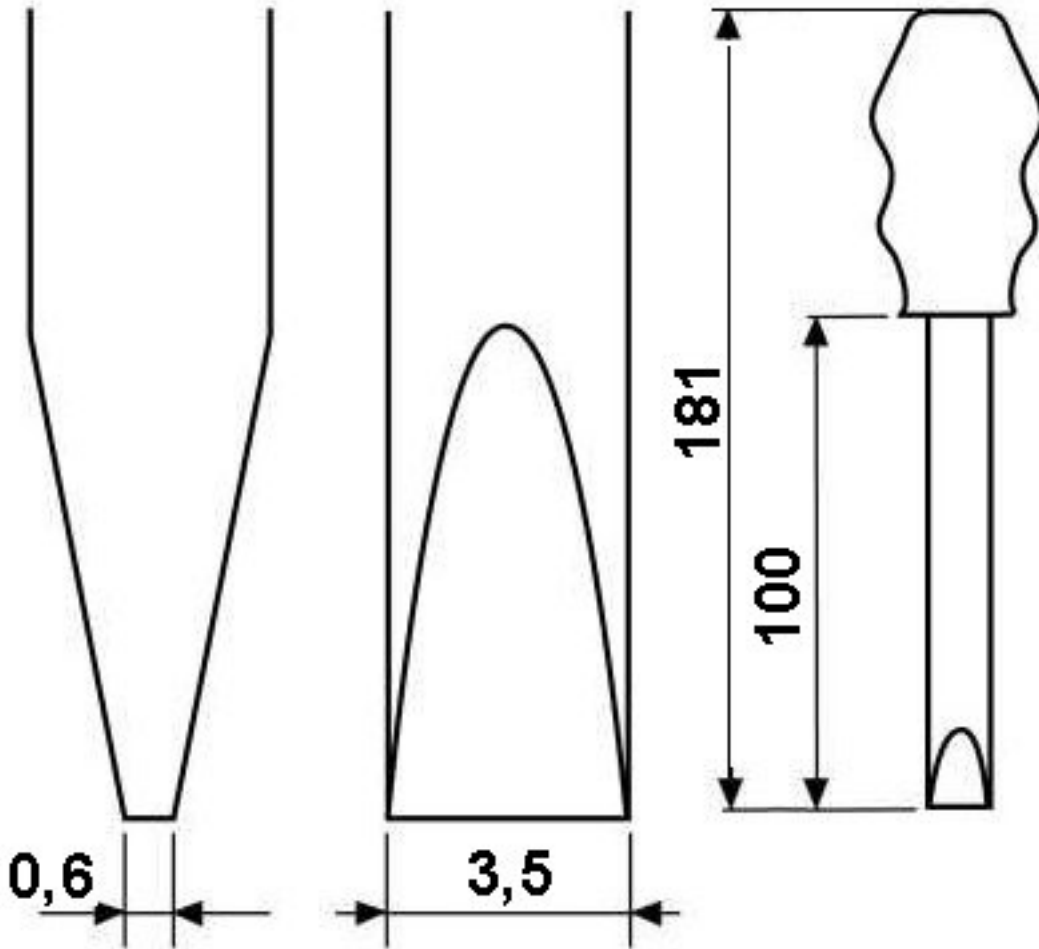

## Screwdriver - SF-SL 0,6X3,5-100 S-VDE - 1212587

Pictogram

