

JACKCON *Electrolytic Capacitors*

105°C **LAK**SERIES

- 規格書

Item	Performance Characteristics												
Operating Temperature Range(°C)	-40+105°C 10 to 100VDC						-25+105°C 160 to 450VDC						
Capacitance Tolerance (%)	±20%												
Rated Voltage Range(v)	10	16	25	35	50	63	100	160	200	250	350	400	450
Dissipation Factor(tan δ %)max.	20	17	15	12	10	10	10	20	20	20	20	24	24
Leakage Current (LC.) (µA /after 5 min.)max.	I ≤ 0.02 CV or 3(µA) After 5 minute whichever is greater measured With rated working voltage applied						I ≤ 0.03 CV or 4(µA) After 5 minute With rated working voltage applied						
Life Test :	Δ C/C		Within ±20% of the initial value										
Load Life Test : After 1000 Hrs at 105°C	Tan δ		≤ 200% of the initial specified value										
Shelf Life Test : After 500 Hrs at 105°C	LC.		Load : ≤ The initial specified value Shelf : ≤ 200% specified value										
Detail specifications	Conform to IEC 60384-4												

Spec. & RIPPLE CURRENT:


uF	WV	SIZE	Maximum Ripple Current
22	16	6X13	48mA,rms,120Hz at 105°C

Dimensions

φ D	5	6	8	10	13	16	18	20	22	25
φ d	0.6	0.6	0.6	0.6	0.6	0.8	0.8	0.8	0.8	0.8

Multiplier for Ripple Current VS, Frequency

CAP(uF)Hz	50(60)	120	500	1K	10K
Under 100	0.70	1.00	1.30	1.40	1.50
100 < CAP ≤ 1000	0.75	1.00	1.20	1.30	1.35
1000 up above	0.80	1.00	1.10	1.12	1.15

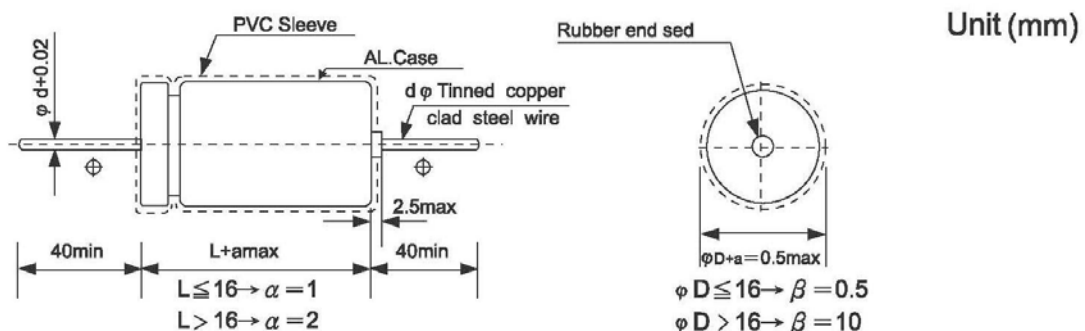

JACKCON *Electrolytic Capacitors*

CONTENTS OF QUALITY ASSURANCE

SCOPE ASSURANCE METHOD CONTENTS

Performance

Unless otherwise specified, the capacitors shall be measured at +15°C to +35°C , 45to75%RH. However, if any Doubt arises on the judgment, the measurement conditions shall be +20±1°C, 60to70%RH the test Conditions shall comply with IEC-60384-4.

1. Capacitance(CAP.)

Measuring frequency :120Hz±20%
 Measuring voltage :0.5V rms. +1.5 to 2.0V dc
 Measuring circuit :Series equivalent circuit.

Criteria: Shall be within the specified capacitance tolerance.

2.Dissipation Factor (tan δ)

Measuring frequency :120Hz±20%
 Measuring voltage :0.5V rms. +1.5 to 2.0V dc
 Measuring circuit :Series equivalent circuit.

Criteria: Shall not exceed the specified in the table of Ratings.

3. Leakage Current (L. C.)

DC leakage current shall be measure with rate voltage, which is applied through a resistor of $1,000 \pm 10 \Omega$ connected in series with the capacitors , at the end of a specified period after the capacitors reached the rated voltage across the terminals.

Criteria: Shall not exceed the specified in the table of Ratings.

4. Surge Voltage

4.1 The surge DC rating is the maximum voltage to which the capacitor should be subjected under any conditions. This includes transients and peak ripple at the highest line voltage.

4.2 Capacitors, connected in series with 1000 ohm resistors, shall withstand the surge test voltage applied at the rated of 1/2 minute on, 4 1/2 minutes off, for 1000 successive test cycles at 20°C (see the following table)

PERFORMANCE CHARACTERISTICS(continued)

Rated Voltage (WV)	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450
Surge Voltage (SV)	10	13	20	32	44	63	79	125	200	250	300	400	450	500

Criteria: Capacitance change : $\cong \pm 15\%$ of initial value
 Dissipation Factor : within specified value
 Leakage Current : within specified value
 Physical : no broken and undamaged

JACKCON *Electrolytic Capacitors*

Endurance characteristic

NO.	Item	Condition	Specification	
5	High temperature load life test	<ol style="list-style-type: none"> Capacitors shall be placed in oven with application of ripple current and rate voltage for 1000 ± 12 hrs at 105°C The capacitors should be use within specified permissible ripple current in each standard products table (the sum of DC working voltage and AC peak voltage shall be equal to the rated DC working voltage) The specified maximum permissible ripple current in defined at 105°C and 120 Hz Then the capacitor shall be subjected to standard atmospheric conditions for 16 hours, after witch measurements shall be made. 	Capacitance change	Within $\pm 20\%$ of the initial value
			TAN δ	Less then 200% of specified value
			Leakage Current	Within specified value
			Physical	no broken and undamaged
6.	High temperature shelf life test	After 500hrs test at 105°C without rated working voltage. And then the capacitor shall be subjected to standard atmospheric conditions for 16 hours, after witch measurements shall be made.	Capacitance change	Within $\pm 20\%$ of the initial value
			TAN δ	Less then 200% of specified value
			Leakage Current	Less then 200% of specified value
			Physical	no broken and undamaged
7.	Rotational temperature test	Capacitor is place in a oven whose temperature follow specific regulation to change. The specific regulations is “ $+25^{\circ}\text{C}$ (1 hr) \rightarrow $+105^{\circ}\text{C}$ (2 hrs) \rightarrow $+25^{\circ}\text{C}$ (0.5 hr) \rightarrow -40°C (2 hrs) \rightarrow $+25^{\circ}\text{C}$ (0.5 hr)”, and it called a cycle. The test totals 10 cycles. And then the capacitor shall be subjected to standard atmospheric conditions for 16 hours, after witch measurements shall be made.	Capacitance change	Within $\pm 10\%$ of the initial value
			TAN δ	Within specified value
			Leakage Current	Within specified value
			Physical	no broken and undamaged
8.	Humidity test	Capacitors shall be exposed for 500 ± 8 hrs in an atmosphere of 90~95%R.H at 40°C . And then the capacitor shall be subjected to standard atmospheric conditions for 16 hours, after witch measurements shall be made.	Capacitance change	Within $\pm 10\%$ of the initial value
			TAN δ	Less then 120% of specified value
			Leakage Current	Within specified value
			Physical	no broken and undamaged

JACKCON *Electrolytic Capacitors*

9.	Low temperature test	Capacitor are place at $-40 \pm 3^{\circ}\text{C}$ for 72 ± 4 hrs. And then the capacitor shall be subjected to standard atmospheric conditions for 16 hours, after witch measurements shall be made.	Capacitance change	Within $\pm 10\%$ of the initial value																		
			TAN δ	Within specified value																		
			Leakage Current	Within specified value																		
			Physical	no broken and undamaged																		
10.	Vibration test	<ol style="list-style-type: none"> Fix it at the point 4mm or less form body. For ones of 12.5mm or 25mm or more length, use separate fixture. Direction and during of vibration:3 orthogonal direction each for 2hrs total 6hrs. Mutually frequency: 10 to55Hz reciprocation for 1 min. Total amplitude:1.5mm 	Capacitance change	Within $\pm 10\%$ of the initial value																		
			TAN δ	Within specified value																		
			Leakage Current	Within specified value																		
			Physical	no broken and undamaged																		
11.	Reflow test	<ol style="list-style-type: none"> IR Reflow <div style="text-align: center;"> </div> <table border="1" style="margin-top: 10px;"> <tr> <td rowspan="2">Preheat</td> <td>Temp (T1~T2)</td> <td>100~150°C</td> </tr> <tr> <td>Time (t1) max</td> <td>40 sec</td> </tr> <tr> <td rowspan="2">Duration</td> <td>Temp(T3)</td> <td>260°C</td> </tr> <tr> <td>Time (t2) max</td> <td>10 sec</td> </tr> <tr> <td rowspan="2">Peck</td> <td>Temp(T4)</td> <td>270°C</td> </tr> <tr> <td>Time (t3) max</td> <td>5 sec</td> </tr> <tr> <td>Reflow cycle</td> <td colspan="2">Twice or less</td> </tr> </table> Solder bath method: Solder temperature:$260 \pm 3^{\circ}\text{C}$ Immersion time:$5+1/-0$ sec Thickness of heat shunt (Printed wiring board):1.6mm Soldering iron method: Bit temperature: $350 \pm 10^{\circ}\text{C}$ Application time of soldering Iron:$3+1/-0$ sec 	Preheat	Temp (T1~T2)	100~150°C	Time (t1) max	40 sec	Duration	Temp(T3)	260°C	Time (t2) max	10 sec	Peck	Temp(T4)	270°C	Time (t3) max	5 sec	Reflow cycle	Twice or less		Capacitance change	Within $\pm 10\%$ of the initial value
				Preheat	Temp (T1~T2)	100~150°C																
			Time (t1) max		40 sec																	
			Duration	Temp(T3)	260°C																	
Time (t2) max	10 sec																					
Peck	Temp(T4)	270°C																				
	Time (t3) max	5 sec																				
Reflow cycle	Twice or less																					
TAN δ	Within specified value																					
Leakage Current	Within specified value																					
Physical	no broken and undamaged																					

JACKCON *Electrolytic Capacitors*

12.	Solderability test	After the lead wire fully immersed in the solder for 2 ± 0.1 sec at a temperature of $245 \pm 2^\circ\text{C}$, the solder coating must be more than 95%																
13.	Mechanical	<p>1. The test is about lead tabs strength.</p> <p>2. Tension test: The lead tabs shall not be broken or any malformed condition after fixing capacitor vertically and pressing the following weight on the lead tabs of capacitor for 10 ± 1 sec.</p> <table border="1" data-bbox="603 622 1238 757"> <thead> <tr> <th>Lead tabs diameter(mm)</th> <th>Weight(Kg)</th> </tr> </thead> <tbody> <tr> <td>≤ 0.5</td> <td>0.5</td> </tr> <tr> <td>0.6~0.8</td> <td>1.0</td> </tr> <tr> <td>>0.8</td> <td>2.5</td> </tr> </tbody> </table> <p>3. Bending test: The capacitor is held in vertical position. Attach a weight to the lead tabs, slowly rotate the capacitor 90° to a same way in the opposite direction. Repeat it again (5 secs per cycle). The lead tabs shall not be broken or cracked.</p> <table border="1" data-bbox="603 1003 1238 1137"> <thead> <tr> <th>Lead tabs diameter(mm)</th> <th>Weight(Kg)</th> </tr> </thead> <tbody> <tr> <td>≤ 0.5</td> <td>0.5</td> </tr> <tr> <td>0.6~0.8</td> <td>1.0</td> </tr> <tr> <td>>0.8</td> <td>2.5</td> </tr> </tbody> </table>	Lead tabs diameter(mm)	Weight(Kg)	≤ 0.5	0.5	0.6~0.8	1.0	>0.8	2.5	Lead tabs diameter(mm)	Weight(Kg)	≤ 0.5	0.5	0.6~0.8	1.0	>0.8	2.5
Lead tabs diameter(mm)	Weight(Kg)																	
≤ 0.5	0.5																	
0.6~0.8	1.0																	
>0.8	2.5																	
Lead tabs diameter(mm)	Weight(Kg)																	
≤ 0.5	0.5																	
0.6~0.8	1.0																	
>0.8	2.5																	
14.	Safety vent	<p>Condition: Apply a reverse voltage with current 1 amp.(DC reverse voltage test)</p> <p>Criteria: When the pressure relief vent operated, the capacitor shall not flame although gas generation or expulsion of a part of the inside element is allowable. If the vent does not operate with the voltage applied for 30 minutes, the test is Considered to be passed.</p>																
15.	Standards	Satisfies Characteristic W of IEC-60384-4,18																

JACKCON *Electrolytic Capacitors*

CODE CONSTRUCTION

LAK	220	M	16	V	6	13	----
<u>Series</u> (1)	<u>Capacitance</u> (2)	<u>Tol.</u> (3)	<u>Voltage</u> (4)	<u>Sleeve</u> (5)	<u>Dia.</u> (6)	<u>Length</u> (7)	<u>Forming</u> (8)

(1) Series:

LGK	LHK	LMK	LSM	LEK	LPS	LKP	LNP	LLK	LBP
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

(2) Capacitance (uF):

μ F	0.1	1	10	100	1000	10000	1.5
Code	0R1	010	100	101	102	103	1R5
μ F	0.22	2.2	22	220	2200	22000	15
Code	R22	2R2	220	221	222	223	150
μ F	0.33	3.3	33	330	3300	33000	150
Code	R33	3R3	330	331	332	333	151
μ F	0.47	4.7	47	470	4700	47000	1500
Code	R47	4R7	470	471	472	473	152

(3) Tolerance:

Code	J	K	M
Tolerance	$\pm 5\%$	$\pm 10\%$	$\pm 20\%$

(4) Working Voltage (V):

6.3	10	16	25	35	50	63
100	160	200	250	350	400	450

(5) Sleeve:

Code	V	E
Sleeve	PVC	PET

(6) Diameter (mm):

4	5	6	8	10	13	16	18
22	25	30	35	51	64	77	90

(7) Length (mm):

5	7	9	11	12	14	16	20	21	25
26	31	33	36	40	42	45	50	53	65
75	83	96	100	115	121	130	140	144	157

(8) Forming (optional):

Taping + pitch (mm)	Cutting + length (mm)	Kink + pitch (mm)
TB2	C3.3	K5
TB2.5	C3.5	
TB3.5	C5	
TB5	C7	

JACKCON *Electrolytic Capacitors*

L A B E L

FRONT

JACKCON	Electrolytic Capacitor	
Capacitance Range:	22	uF
Voltage Range:	16	V
Quantity:	<u>1000</u>	pcs
Remark: 6*13	105°C	RoHS
MADE IN TAIWAN		COMPLIANT

Lot No : 8 070313-000314


DATE LOT NO.

JACKCON *Electrolytic Capacitors*

Marking

FRONT

JACKCON
22uF16V
-40+105°C

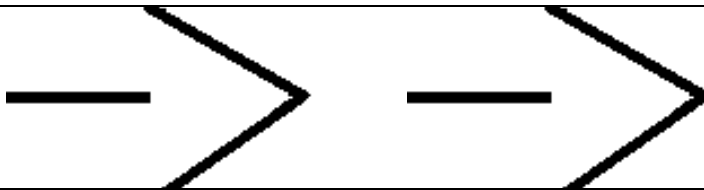

BACK

02 (PRODUCTION LINE)

10D (DATE CODE)

LAK