

# Monitoring relay - EMD-SL-LL-230 - 2885906

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Monitoring relay for level monitoring of conductive fluids, minimum monitoring, maximum monitoring, 230 V AC supply voltage, 2 PDTs

## Product Description

Increasingly higher demands are being placed on safety and system availability – across all sectors. Processes are becoming more and more complex, not only in mechanical engineering and the chemical industry, but also in plant and automation technology. Demands on power engineering are also increasing constantly. Error-free and therefore cost-effective operation can only be achieved through continuous monitoring of important network and system parameters. Electronic monitoring relays in the EMD series are available for a wide range of monitoring tasks to avoid the consequences of errors or to keep them within limits. The operating states are indicated using colored LEDs, errors that may occur can be sent to a control system via a floating contact or can shut down a part of the system. Some device versions are equipped with startup and response delays in order to briefly tolerate measured values outside the set monitoring range.

## Product Features

- Short-circuit and open-circuit monitoring
- Test function with integrated test/reset button
- Variable supply voltage range



## Key commercial data

package_quantity	1
GTIN	4046356144148

## Technical data

### Dimensions

Width	22.5 mm
Height	90 mm
Depth	113 mm

### Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
Ambient temperature (operation)	-25 °C ... 40 °C (corresponds to UL 508)
Ambient temperature (storage/transport)	-25 °C ... 70 °C

### Input data

Function	Pumping up (minimum monitoring), pumping down (maximum monitoring)
Recovery time	500 ms

# Monitoring relay - EMD-SL-LL-230 - 2885906

## Technical data

### Contact side

<b>Contact type</b>	2 floating PDT contacts
<b>Maximum switching voltage</b>	250 V AC (in acc. with IEC 60664-1)
<b>Interrupting rating (ohmic load) max.</b>	750 VA (3 A/250 V AC, module aligned, ≤ 5 mm spacing)
<b>Interrupting rating (ohmic load) max.</b>	1250 VA (5 A/250 V AC, module not aligned, ≥ 5 mm spacing)
<b>Output fuse</b>	5 A (fast-blow)

### Power supply

<b>Supply voltage</b>	230 V AC -15 % ... +15% AC
-----------------------	----------------------------

### General

<b>Mechanical service life</b>	Approx. $2 \times 10^7$ cycles
<b>Operating mode</b>	100% operating factor
<b>Mounting position</b>	Any
<b>Assembly instructions</b>	on standard DIN rail NS 35 in accordance with EN 60715
<b>Electromagnetic compatibility</b>	Conformance with EMC Directive 2004/108/EC
<b>Surge voltage category</b>	III, basic insulation (as per EN 50178)
<b>Housing insulation material</b>	Polyamide PA, self-extinguishing
<b>Color</b>	green
<b>Rated insulation voltage</b>	300 V (According to EN 50178)
<b>Conformance</b>	CE-compliant
<b>UL, USA / Canada</b>	UL/C-UL listed UL 508

### Connection data

<b>Conductor cross section stranded min.</b>	0.25 mm <sup>2</sup>
<b>Conductor cross section stranded max.</b>	2.5 mm <sup>2</sup>
<b>Conductor cross section solid min.</b>	0.5 mm <sup>2</sup>
<b>Conductor cross section solid max.</b>	2.5 mm <sup>2</sup>
<b>Conductor cross section AWG/kcmil min.</b>	20
<b>Conductor cross section AWG/kcmil max</b>	14
<b>Stripping length</b>	8 mm
<b>Connection method</b>	Screw connection

## classifications

### eCl@ss

<b>eCl@ss 4.0</b>	27371105
<b>eCl@ss 4.1</b>	27371105
<b>eCl@ss 5.0</b>	27371801
<b>eCl@ss 5.1</b>	27371801
<b>eCl@ss 6.0</b>	27371801
<b>eCl@ss 7.0</b>	27371801
<b>eCl@ss 8.0</b>	27371801

### ETIM

# Monitoring relay - EMD-SL-LL-230 - 2885906

## classifications

### ETIM

<b>ETIM 2.0</b>	EC001438
<b>ETIM 3.0</b>	EC001438
<b>ETIM 4.0</b>	EC001447
<b>ETIM 5.0</b>	EC001449

### UNSPSC

<b>UNSPSC 6.01</b>	30211916
<b>UNSPSC 7.0901</b>	39121535
<b>UNSPSC 11</b>	39121535
<b>UNSPSC 12.01</b>	39121535
<b>UNSPSC 13.2</b>	39121535



## approvals

---

UL Listed / cUL Listed / cULus Listed /

---


### Approval details



## Drawings

# Monitoring relay - EMD-SL-LL-230 - 2885906

Block diagram

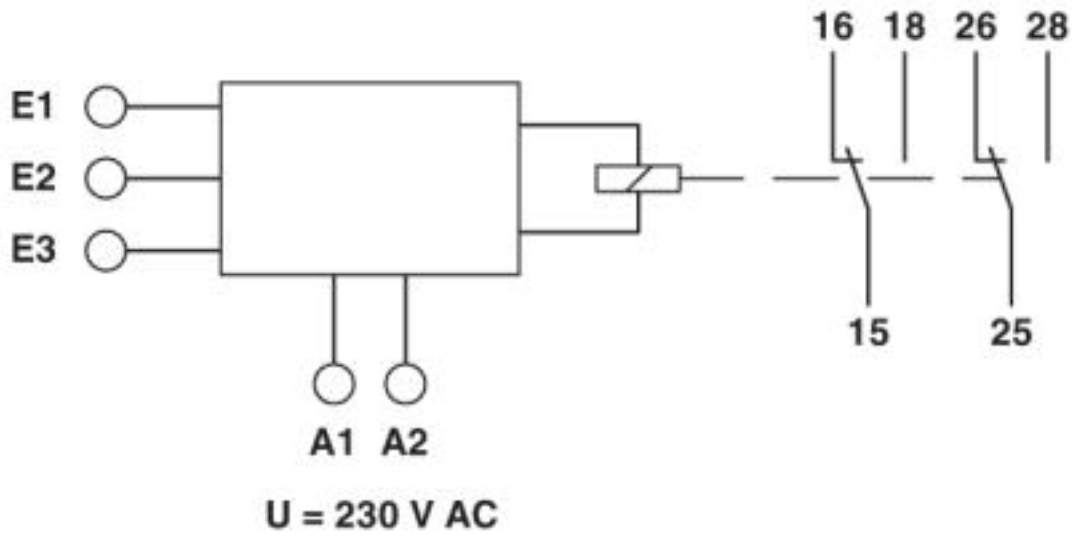

© Phoenix Contact 2013 - all rights reserved  
<http://www.phoenixcontact.com>