



1. DETACHABLE PLUG. BLACK PLASTIC RING HARDWARE.
 Ø2.50x5.50x12±0.5mm "I" fork type.
 Used 20P black color PVC.

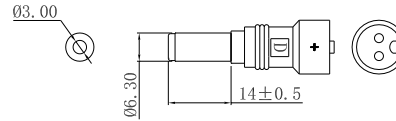


6. DETACHABLE PLUG. BLACK PLASTIC RING HARDWARE.
 Ø3.00x6.30x14±0.5mm "I" type.
 used 20P black color PVC.




2. DETACHABLE PLUG. BLACK PLASTIC RING HARDWARE.
 Ø0.60x7.40x12.5±0.5. mm "I" type.
 Used 20p black color pvc.


👉 10k 1/8W resistance+4.7k 1/8W resistance.




7. DETACHABLE PLUG. YELLOW PLASTIC RING HARDWARE.
 Ø1.70x4.75x9.5±0.5mm "I" type.
 used 20P black color PVC.

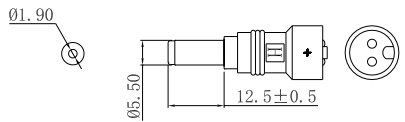


3. DETACHABLE PLUG. BLACK PLASTIC RING HARDWARE.
 Ø1.90x5.50x12.5±0.5mm "I" type.
 used 20P black color PVC.




8. DETACHABLE PLUG. BLACK PLASTIC RING HARDWARE.
 Ø1.70x5.50x10±0.5mm "L" type.
 Used 20P black color PVC.

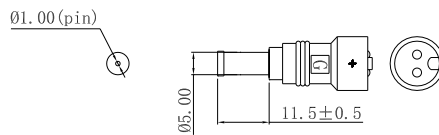


4. DETACHABLE PLUG. YELLOW PLASTIC RING HARDWARE.
 Ø1.00 (pin)x5.00x11.5±0.5mm "I" type.
 used 20P black color PVC.



9. DETACHABLE PLUG. ORANGE PLASTIC RING HARDWARE.
 Ø2.10x5.50x12±0.5mm "L" type.
 used 20P black color PVC.

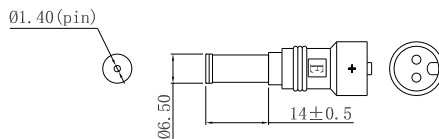

5. DETACHABLE PLUG. BLACK PLASTIC RING HARDWARE.
 Ø1.40 (pin)x6.50x14±0.5mm "I" type.
 used 20P black color PVC.



FUNCTION TEST: No open, no reversed polarity, no short-circuit, no INT.
 FINISHED PRODUCT ASSEMBLY SHALL BE IN COMPLIANCE WITH RoHS REQUIREMENT.

TOLERANCE	DESIGN/DATE	兰宗洲17/09/2009	DC CABLE			
X=±0.5mm	DRAWING/DATE	兰宗洲17/09/2009				
. X=±0.3mm	ASSESSOR		DESIGN	SIGN	REV	SEC
	DATE		00		R0	
. XX=±0.05mm	RATIFIER					
	DATE					
					MM	